

## Contact us

### ABB Oy

Muottitie 2A 65320

Vaasa, Finland


[abb.com/lowvoltage](http://abb.com/lowvoltage)



© Copyright 2025 ABB. All rights reserved.  
Specifications subject to change without notice.

34OT\_G3-68 rev. D / 15CC301150M0202 # 28.02.2025


## OT Plus OT30...160G3- & OTC30...160G3-

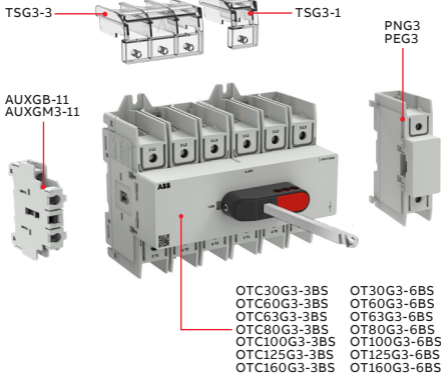


OT30G3-8BS  
OT60G3-8BS  
OT63G3-8BS  
OT80G3-8BS  
OT100G3-8BS  
OT125G3-8BS

OTC30G3-4BS  
OTC60G3-4BS  
OTC63G3-4BS  
OTC80G3-4BS  
OTC100G3-4BS  
OTC125G3-4BS  
OTC160G3-4BS


## Mounting

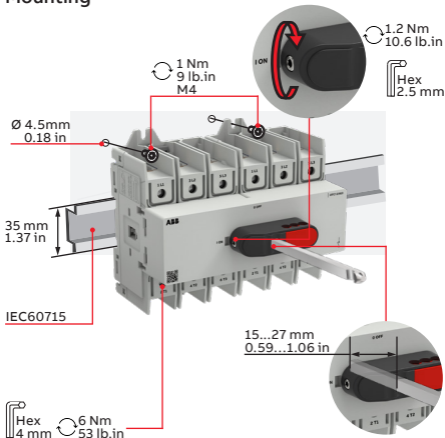


## Padlock

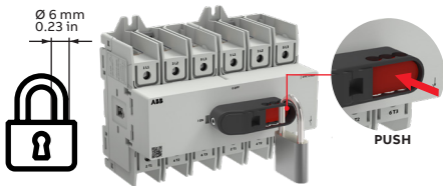

## Adjustable neutral pole timing

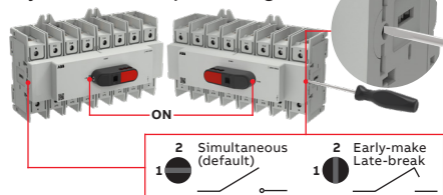

## Clearances per UL98

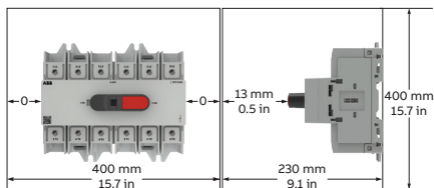

Wire type (Cu only)	1 Wire (mm <sup>2</sup> )	2 Wire (mm <sup>2</sup> )	Stripping length	Tightening torque
Class 5-Flexible	4-70	4-25		
Class 2-Stranded	4-70	4-25		
Class 6-Very flexible with ferrule	2.5-4	2.5-4	16-18 mm 0.63-0.71 in	6 Nm 53 lb.in
Class 1-Solid	2.5-6	2.5-6		
UL - CU wire size (AWG)	12-2/0			

## OTC30...160G3-

	OFF	OFF	OFF
Switch I	ON	ON	ON
Switch II			



Warning! Hazardous voltage! Installation by person with electrotechnical expertise only.

