

Easy Eco

IP65 **IK10** **-O-** 5 x 2.5mm²

YLEISVALAISIN | UNIVERSALARMATUR | UNIVERSAL LUMINAIRE

220 - 240 V ~ 50/60HZ
Tc : -20°C - +40°C

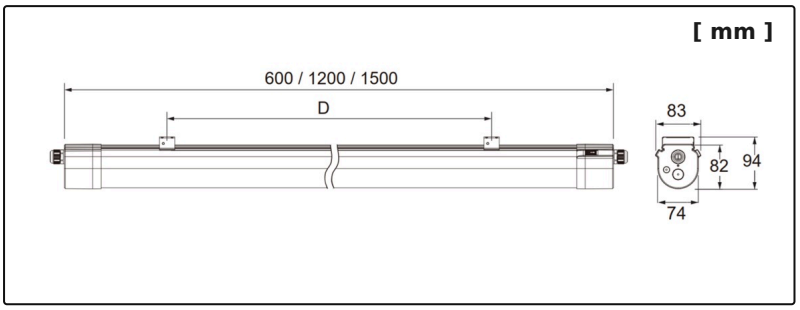

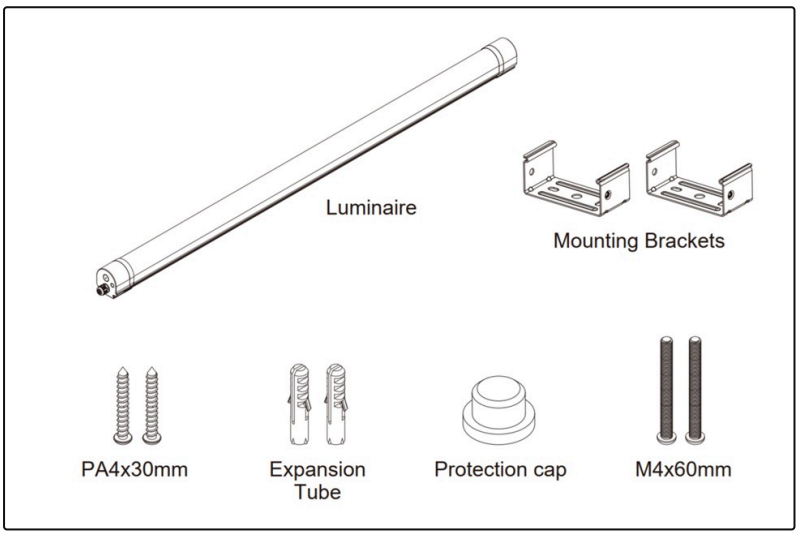

FI

Tämä tuote sisältää energiatehokkuusluokan C valonlähteen.

Valaisimen saa asentaa vain sähköalan ammattilainen. Käytä ainoastaan syöttöjännitettä ja taajuutta, joka on merkitty valaisimeen / liitäntälaitteeseen. Kytke virta pois päältä ennen asennusta tai huoltoa. Tämä asennusohje on säilytettävä ja sen on oltava käytössä asennuksessa ja huollossa. Tämän valaisimen valonlähde ja virtalähde voidaan vaihtaa vain ammattilaisen toimesta.

EN

This product contains an energy efficiency class C light source.

The luminaire may only be installed by an electrician. Use only the supply voltage and frequency marked on the luminaire / ballast. Turn off the power before installation or maintenance. These installation instructions must be kept and used during installation and maintenance. The light source and driver of this lamp can be replaced only by a professional.

SWE

Denna produkt innehåller en ljuskälla av energieffektivitetsklass C.

Armaturen får endast installeras av elektriker. Använd endast matningsspänningen och frekvensen markerade på armaturen/donet. Stäng av strömmen före installation eller underhåll. Dessa installationsanvisningar måste förvaras och användas under installation och underhåll. Ljuskällan och strömförsörjningen för denna lampa kan bytas endast av en professionell.

JOHDONSUOJATAULUKKO / CIRCUIT BREAKER / STRÖMBRYTARE


Tuotenumero	Käynnistysvirta (A)	Käynnistysaika (µs)	B10	C10	B16	C16	B20	C20
4335773	9.7 A	0.21 µs	36	60	57	96	72	120
4335774	12.5 A	0.22 µs	18	30	28	47	35	59
4335775	12.5 A	0.22 µs	18	30	28	47	35	59
4335776	19.2 A	0.24 µs	15	25	24	40	30	50
4335777	11.2 A	0.24 µs	27	44	30	71	53	89
4335778	17 A	0.22 µs	18	31	30	49	37	49
4335779	17 A	0.22 µs	18	31	30	49	37	49
4335780	20 A	0.28 µs	12	19	19	31	23	62

Easy Eco


IP65 IK10 -O- 5 x 2.5mm²


Asennus | Installation | Installation

Surface mounted

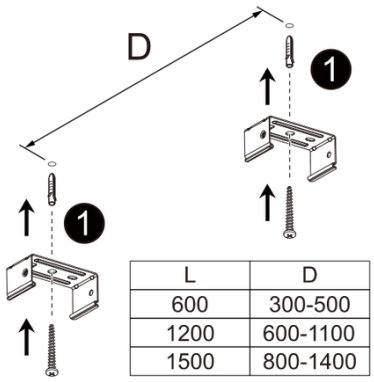


L	D
600	300-500
1200	600-1100
1500	800-1400




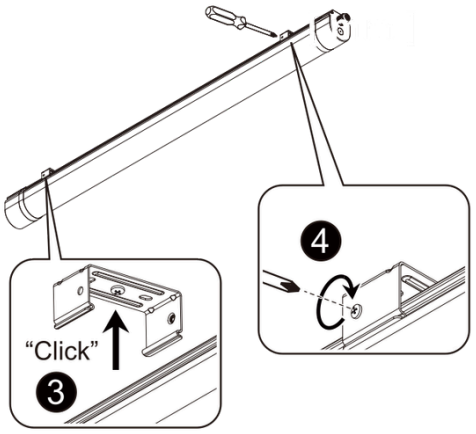

Open the cap

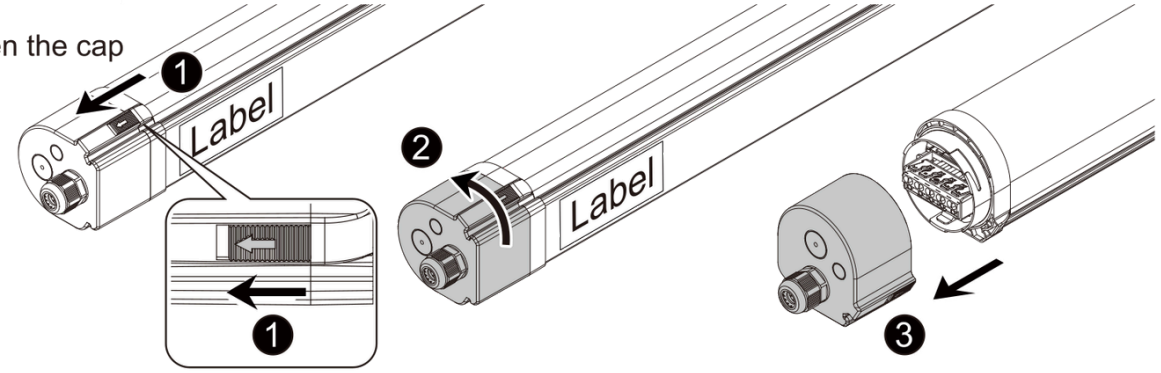

Pull out the power board

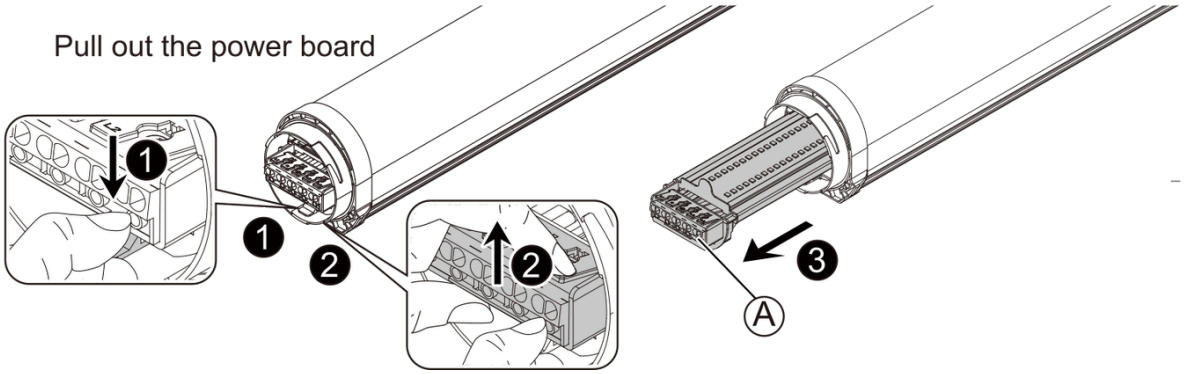

Easy Eco


IP65 IK10 -O- 5 x 2.5mm²


Kytkentä | Anslutning | Wiring


Connecting Power

5 Wires

5 Wires specification:

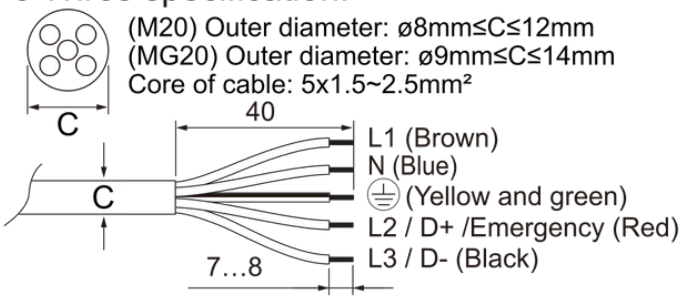


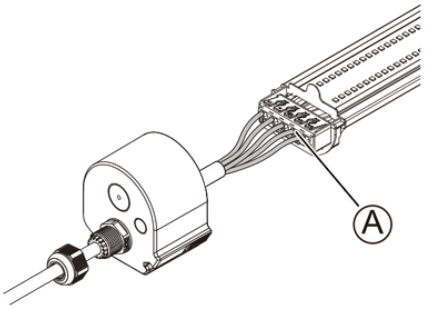

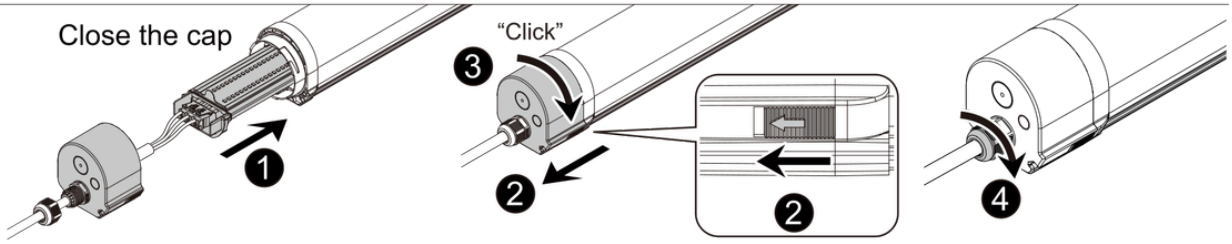


Single Luminaire (Optional)

220-240V

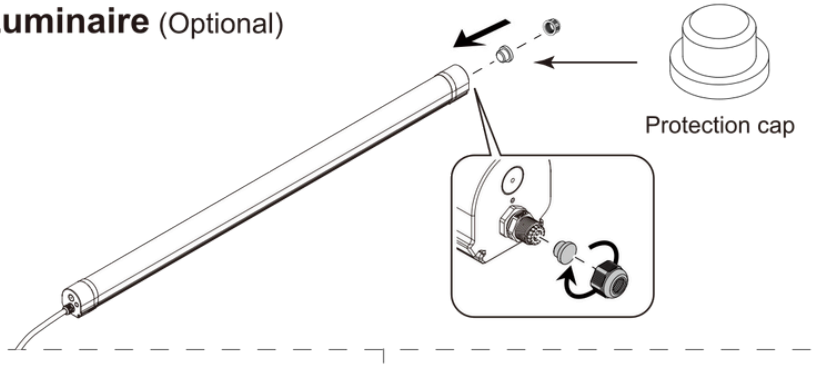

Linkable A (Optional)

220-240V

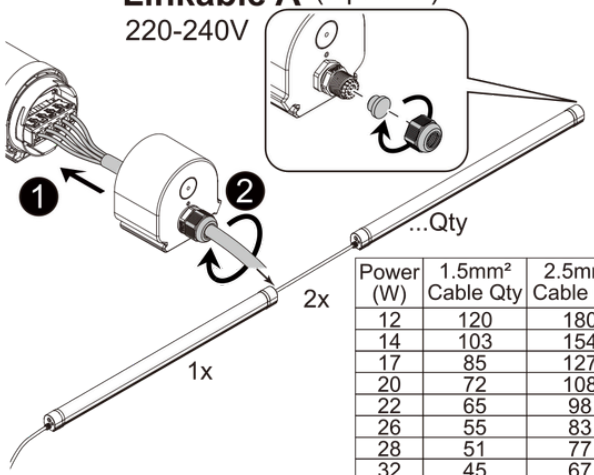

Power (W)	1.5mm² Cable Qty	2.5mm² Cable Qty
12	120	180
14	103	154
17	85	127
20	72	108
22	65	98
26	55	83
28	51	77
32	45	67
34	42	63
38	38	56
40	36	54
42	34	51
45	32	48
50	28	43
60	24	36

Linkable B (Optional)

220-240V

