



Acciaio

ACCIAIO REG M1200 51W 4K



Order code **A258RD**

EAN 8002219883582

Technical specifications




Absorbed Power	51 W, 43 W, 35 W, 28 W
Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
Photobiological risk	RG0
Colour consistency	SDCM3
CRI color rendering	>80
Driver type	RD
Ballast	For constant current LED
Efficiency	157 lm/W, 163 lm/W, 171 lm/W, 175 lm/W
Energy class	C
Equivalent power	2x36w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Glow wire strength	850 °C - 30s.
Inrush current	45 A
Inrush time	0.2
Luminaire flux	8000 lm, 7000 lm, 6000 lm, 4900 lm
Luminous flux L80B20	90000 h
Mounting	Ceiling
Breaker B16 (Qty max)	17
Breaker C16 (Qty max)	28
THD	20
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Installation and applications

Environment	Secondary Areas
Application	Production, Warehouses , Industrial Areas

Mechanical specifications

Height	90 mm
Length	1208 mm
Width	108 mm
Weight	3.2 Kg
Body material	Sheet steel epoxy coated
Colour housing	Grey RAL 7035

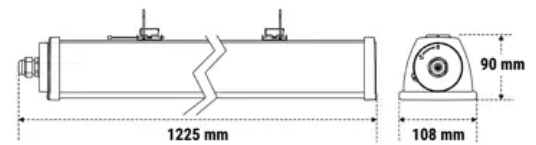

Cover material	Tempered microprismatic glass
Reflector material	Specular Aluminium
Protection grade IP	IP66
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-1:1989, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020, EN IEC 61000-3-2 :2019

Accessories



15018
KIT ATEX ACCIAIO ECO



15019
RACCORDO DOPPIO
INGRESSO M20



8063
BS100 GRIGLIA PROTEZ
36/58W



20122
STAFFA ORIENTABILE ACC E
LED



20107
SCHERMO ACC PROTEZ HCCP
1200



8063/1
GR STAFFA UNICA GRIGLIA
8063