FIBOX CAB ABS

500 X 400 X 200

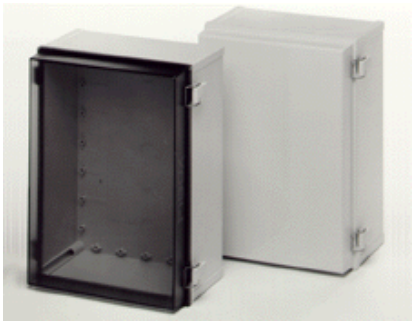

This is a sample photo.

ORDER SYMBOL: CAB ABS 504020 G

EL.number **EAN:** 6418074020383

Sweden:

Denmark: 8212020566

Finland: 3424320

INCLUDING:

Cabinet body, door with EPDM gasket, hinges, latches, mounting screws, and corner plugs.

APPROVALS:

USA: NEMA 4, 4X, 12; UL 94-HB

EURO: IP 65; UL 94-HB

OTHERS: IEC 529, EEI

FIBOX CAB ABS

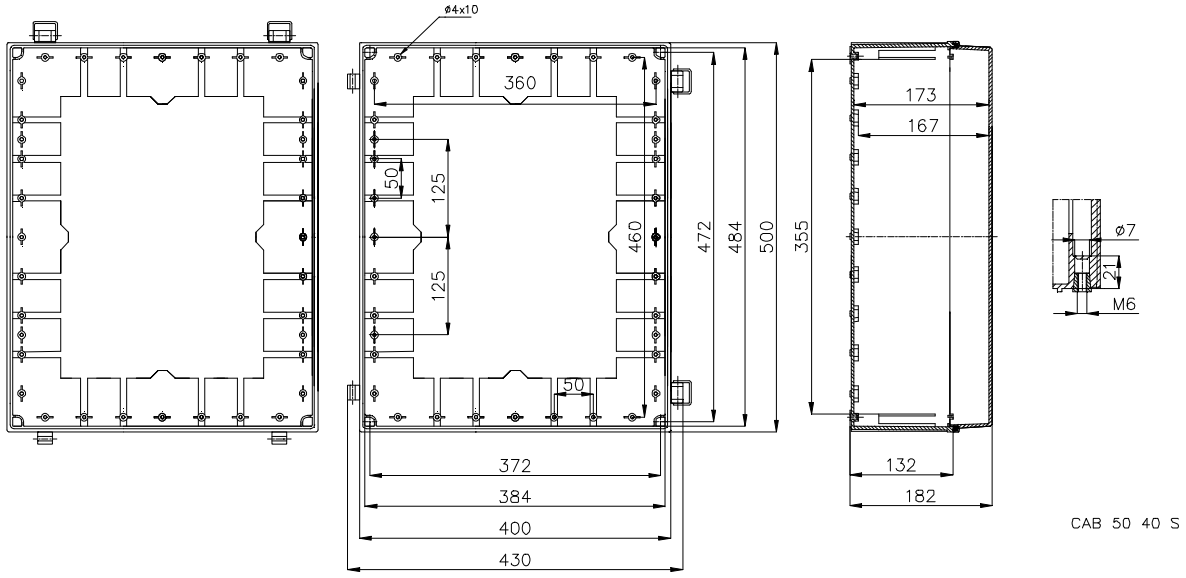

TECHNICAL INFORMATION:

Standard colour:	RAL 7035	Temp.range in cont. use:	Max. +60 °C
Ingress protection:	IP 65 (IEC 529, EN 60529)	Temp. range of material:	- 40 °C - + 80 °C
Flame resistance:	UL 94-HB		

ACCESSORIES

Inspection window	L 02	Inspection window	L 24
Inspection window	L 04	Inspection window	L 24 II
Inspection window	L 06	Ventilation device	MB 10631
Inspection window	L 08		
Inspection window	L 10		
Inspection window	L 12		
Inspection window	L 12 II		
Inspection window	L 13		

(c) FIBOX Oy Data subject to change without notice.