

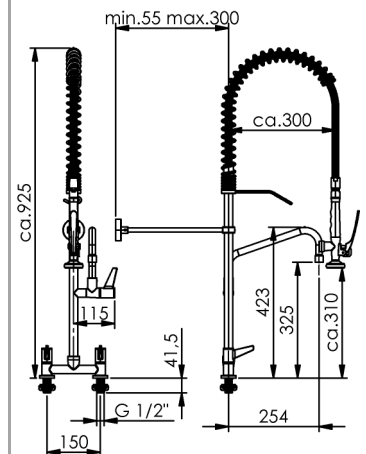
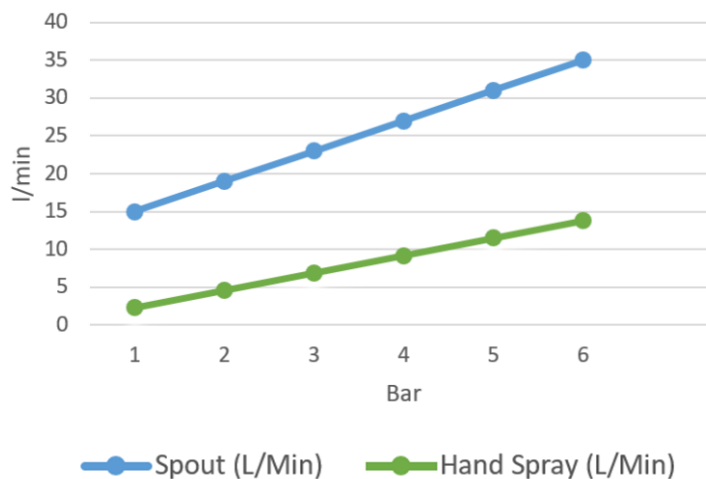
Designation: **EcoStar stainless steel 304 pre rinse unit with HU-spout, two-handle mixer tap, 2-hole stand**
Material: **Stainless Steel**






Article number: **700-201/255-325**

- Technical data:
- Mixer tap: Two-handle mixer tap
 - Operating pressure 1 - 6 bar (14.5 - 87 psi)
 - For high pressure only
 - Ceramic headworks (mixer)
 - Heat-insulating handles
 - Ergonomic hand spray with integrated closing delay for reduced pressure surges
 - Swivel spout with valve for comfortable operation with projection L= 254mm ,H = 320 mm
 - Wall bracket without visible thread (35mm to 300mm)
 - Down-graded stainless steel hook for quick fixing and taking of hand spray
 - Hose: Stainless steel high-performance Aggraff-hose,920 mm
 - Chrome-plated brass nuts, 360° swivelling hand spray connection
 - Non-return valves
 - Hot water resistant up to 80°C
 - Installation: Work Top Bore Holes 2x Ø23mm with distance dimension 150mm
 - Flow rate hand spray : 2.3 - 9.2 l/min (1 - 4 bar, 14.5 - 58 psi)
 - Flowrate spout: 15 - 27 l/min (1- 4 bar, 14.5 - 58 psi)

- Description:
- **Robust Design:** All components of the pre-rinse are designed for use in professional kitchens
 - **Extended work area:** Stainless steel spring for large work area
 - **Hand spray** with straight jet for optimum pre-rinsing results
 - **Non-return valves** prevent the circulation between hot and cold water as well as the backflow of dirty water

Flow rate:



| | | |
|--------------------------|---|---|
| <p>Proper use:</p> | <p>The pre rinse unit is used in commercial kitchens. The fitting must only be operated by trained specialist staff with a minimum age of 14 years.</p> <p>Assembly and disassembly may only be carried out by certified specialist tradesmen.</p> |  |
| <p>Improper use:</p> | <p>The pre rinse unit is not suitable for connection to low-pressure hot water boilers.</p> <p>The pre rinse unit must not be used to clean push-through dishwashers. There is a risk of damage to the hose from excessive pulling.</p> |  |
| <p>Warning:</p> | <p>In case of disassembly or repair the angle valves should be shut off.</p> <p>In order to prevent water damage, the mixer tap has to be closed outside business hours.</p> |  |
| <p>Care instruction:</p> | <p>Do not use cleaning agents with a high chlorine or acid content. Refrain from using high-pressure cleaning devices, as defined in work sheet VdF 018, for instance.</p> <p>No types of scouring agents are to be used for cleaning purposes as they scratch the surface.</p> |  |
| <p>Admissions:</p> | <p>All seals meet the requirements for plastics in contact with water and the requirements of DVGW work sheet W 270. All solders are cadmium and lead free.</p> |  |
| <p>Manufacturer:</p> | <p>Gebr. Echtermann GmbH & Co.KG Bertholdstr.5 D- 58644 Iserlohn</p> <p>Tel: +49 (0) 2371 / 9582-0 Fax: +49 (0) 2371 / 52787 Email: contact@echtermann.de</p> | |