


## DEVIflex™ 18T - set with thermostat





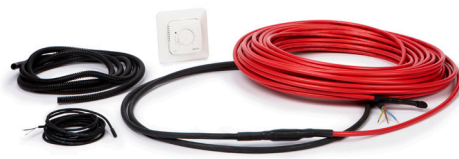

**20 YEAR WARRANTY**

Product Installation Floor/Surface

DEVIflex™ 18T is a high-performance, flexible electrical heating cable that complies with the M2 requirements of the tough IEC 60800:2009 standard.

This set includes the DEVIflex™ 18T, the DEVIreg™ 530 (incl. sensor) with a Jussi frame, a flexpipe for the sensor. The DEVIreg™ 530 is a simple but efficient indoor room thermostat, which ensures easy and precise controlling.

DEVIflex™ is a fully screened twin conductor cable with a tough red PVC outer sheath. Top-quality materials and rugged construction mean that we are happy to supply all DEVIflex™ cables with our unique 20-year DEVIwarranty™.

Benefits:	Type	Value
	<ul style="list-style-type: none"> <li>Fast and easy to install</li> <li>Multiple application options</li> <li>Safe and robust</li> <li>Long life-time</li> <li>Maximum protection</li> </ul>	Operation voltage
Construction		Round, twin conductor with screen, one cold lead
Output		18 W/m @ 230V~
Max. permissible use temperature, powered		60° C
Max. permissible use temperature, unpowered		90° C
Cable dimensions		Ø 6.9 mm
Deformation strength		1500N
Pulling strength		500N
Conductor insulation		XLPE
Outer sheath		PVC
<b>Standard compliance:</b> <ul style="list-style-type: none"> <li>IEC60800:2009</li> </ul>	Screen	100% coverage; alu-foil; 0,5 mm <sup>2</sup> tinned copper drain wire
	Cold lead	2.3 m DTCL, earthed
	Min. installation temperature	-5° C
	Min. bending radius	6 x cable diameter (Ø)
	<b>Approvals:</b>    	

### Types

Item no.	Output @ 230V~	Cable length	Resistance	Cold lead	EAN no.
140F1318	130W	7 m	410.3 Ω	3 x 1.5 mm <sup>2</sup>	5703466226513
140F1319	270W	15 m	195.0 Ω	3 x 1.5 mm <sup>2</sup>	5703466226520
140F1320	395W	22 m	134.2 Ω	3 x 1.5 mm <sup>2</sup>	5703466226537
140F1321	535W	29 m	98.6 Ω	3 x 1.5 mm <sup>2</sup>	5703466226544
140F1322	680W	37 m	77.7 Ω	3 x 1.5 mm <sup>2</sup>	5703466226551
140F1323	820W	44 m	64.7 Ω	3 x 1.5 mm <sup>2</sup>	5703466226568
140F1324	935W	52 m	56.7 Ω	3 x 1.5 mm <sup>2</sup>	5703466226575
140F1325	1075W	59 m	49.3 Ω	3 x 1.5 mm <sup>2</sup>	5703466226582
140F1326	1220W	68 m	43.4 Ω	3 x 1.5 mm <sup>2</sup>	5703466226599
140F1327	1340W	74 m	39.5 Ω	3 x 1.5 mm <sup>2</sup>	5703466226605
140F1328	1485W	82 m	35.6 Ω	3 x 1.5 mm <sup>2</sup>	5703466226612
140F1329	1625W	90 m	43.4 Ω	3 x 1.5 mm <sup>2</sup>	5703466226629
140F1330	1880W	105 m	28.1 Ω	3 x 2.5 mm <sup>2</sup>	5703466226636

For product specifications on the DEVIreg™ 530, please see separate Data Sheet.