

## SylCircle

### SYLCIRCLE 6W 350LM

### 0043280



#### Range Features

- Perfect solution for hallways, kitchens or applicable zone 2 bathroom and wet areas thanks to its IP44 rating
- It can be wall or ceiling mounted
- Even and uniform light distribution with a halo lighting effect on the wall surface
- High performance, up to 1,500lm
- Up to 65lm/W
- Supplied with LED driver (non-dimmable)
- IK03 PMMA diffuser
- Low maintenance with 30,000 hours LED life expectancy
- Available in 6W, 12W, 18W or 24W.



## PRODUCT OVERVIEW

<b>Certifications</b>	CE
<b>Colour temperature (K)</b>	3000
<b>Colour</b>	White
<b>CRI (Ra)</b>	80
<b>Dimmable</b>	No
<b>EAN code</b>	5410288432809
<b>Luminous flux (lm)</b>	350
<b>Housing</b>	PMMA diffuser with metal back plate
<b>IK rating</b>	IK03
<b>IP rating</b>	IP44
<b>Light colour</b>	Warm white
<b>LOR (%)</b>	100
<b>Mount</b>	Surface Mounted
<b>Ordering number</b>	0043280
<b>Efficacy (Rated) (lm/w)</b>	58
<b>Average life (Rated) (h)</b>	30000
<b>Technology</b>	LED
<b>Voltage (V)</b>	220-240
<b>Included lamp</b>	Integrated LED

## DATA TABLE

### General data

<b>Average life (Nominal) (h)</b>	30000
<b>Certifications</b>	CE
<b>Dimmable</b>	No

## SylCircle

SYLCIRCLE 6W 350LM

0043280

<b>EAN code</b>	5410288432809
<b>General application</b>	Residential & Consumer,Hospitalit
<b>Housing</b>	PMMA diffuser with metal back plate
<b>Mount</b>	Surface Mounted
<b>Ordering number</b>	0043280
<b>Range features</b>	Perfect solution for hallways, kitchens or applicable zone 2 bathroom and wet areas thanks to its IP44 rating It can be wall or ceiling mounted Even and uniform light distribution with a halo lighting effect on the wall surface High performance, up to 1,500lm Up to 65lm/W Supplied with LED driver (non-dimmable) IK03 PMMA diffuser Low maintenance with 30,000 hours LED life expectancy Available in 6W, 12W, 18W or 24W.
<b>Product name</b>	SYLCIRCLE 6W 350LM
<b>Average life (Rated) (h)</b>	30000
<b>Technology</b>	LED

### Optical data

<b>Colour temperature (K)</b>	3000
<b>CRI (Ra)</b>	80
<b>Distribution type</b>	Direct
<b>Luminous flux (lm)</b>	350
<b>Light colour</b>	Warm white
<b>LOR (%)</b>	100

### Physical data

<b>Colour</b>	White
<b>Diffuser finish</b>	Opal
<b>Height (mm)</b>	75
<b>IK rating</b>	IK03
<b>IP rating</b>	IP44
<b>Lamp included</b>	Integrated
<b>Length (mm)</b>	180
<b>Reflector finish</b>	Diffuser
<b>Weight (kg)</b>	0.3
<b>Width (mm)</b>	180
<b>Included lamp</b>	Integrated LED

### Electrical data

<b>Electrical protection</b>	CLASS I
<b>Efficacy (Rated) (lm/w)</b>	58
<b>Total power consumption (W)</b>	6

## SylCircle SYLCIRCLE 6W 350LM 0043280

Voltage (V)


220-240

### PHOTOMETRY

0.5	1.83	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	334 29
1.0	3.65	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	84 9
1.5	5.48	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	57 2
2.0	7.31	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	21 1
2.5	9.13	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	10 1
3.0	10.96	E <sub>0°</sub> E <sub>10°</sub> E <sub>30°</sub>	61.3°	9 1

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 122.0°)

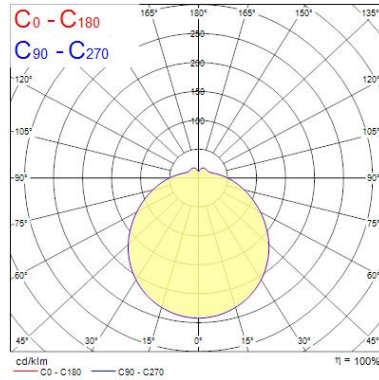

### TECHNICAL DRAWINGS

