

## SylCircle

SYLCIRCLE 24W 1500LM

0043283



### Range Features

- Perfect solution for hallways, kitchens or applicable zone 2 bathroom and wet areas thanks to its IP44 rating
- It can be wall or ceiling mounted
- Even and uniform light distribution with a halo lighting effect on the wall surface
- High performance, up to 1,500lm
- Up to 65lm/W
- Supplied with LED driver (non-dimmable)
- IK03 PMMA diffuser
- Low maintenance with 30,000 hours LED life expectancy
- Available in 6W, 12W, 18W or 24W.



## PRODUCT OVERVIEW

<b>Certifications</b>	CE
<b>Colour temperature (K)</b>	3000
<b>Colour</b>	White
<b>CRI (Ra)</b>	80
<b>Dimmable</b>	No
<b>EAN code</b>	5410288432830
<b>Luminous flux (lm)</b>	1500
<b>Housing</b>	PMMA diffuser with metal back plate
<b>IK rating</b>	IK03
<b>IP rating</b>	IP44
<b>Light colour</b>	Warm white
<b>LOR (%)</b>	100
<b>Mount</b>	Surface Mounted
<b>Ordering number</b>	0043283
<b>Efficacy (Rated) (lm/w)</b>	63
<b>Average life (Rated) (h)</b>	30000
<b>Technology</b>	LED
<b>Voltage (V)</b>	220-240
<b>Included lamp</b>	Integrated LED

## DATA TABLE

### General data

<b>Average life (Nominal) (h)</b>	30000
<b>Certifications</b>	CE
<b>Dimmable</b>	No

## SylCircle

SYLCIRCLE 24W 1500LM

**0043283**

<b>EAN code</b>	5410288432830
<b>General application</b>	Residential & Consumer,Hospitalit
<b>Housing</b>	PMMA diffuser with metal back plate
<b>Mount</b>	Surface Mounted
<b>Ordering number</b>	0043283
<b>Range features</b>	<p>Perfect solution for hallways, kitchens or applicable zone 2 bathroom and wet areas thanks to its IP44 rating            It can be wall or ceiling mounted            Even and uniform light distribution with a halo lighting effect on the wall surface            High performance, up to 1,500lm            Up to 65lm/W            Supplied with LED driver (non-dimmable)            IK03 PMMA diffuser            Low maintenance with 30,000 hours LED life expectancy            Available in 6W, 12W, 18W or 24W.</p>
<b>Product name</b>	SYLCIRCLE 24W 1500LM
<b>Average life (Rated) (h)</b>	30000
<b>Technology</b>	LED

### Optical data

<b>Colour temperature (K)</b>	3000
<b>CRI (Ra)</b>	80
<b>Distribution type</b>	Direct
<b>Luminous flux (lm)</b>	1500
<b>Light colour</b>	Warm white
<b>LOR (%)</b>	100

### Physical data

<b>Colour</b>	White
<b>Diffuser finish</b>	Opal
<b>Height (mm)</b>	105
<b>IK rating</b>	IK03
<b>IP rating</b>	IP44
<b>Lamp included</b>	Integrated
<b>Length (mm)</b>	105
<b>Reflector finish</b>	Diffuser
<b>Weight (kg)</b>	0.6
<b>Width (mm)</b>	380
<b>Included lamp</b>	Integrated LED

### Electrical data

<b>Electrical protection</b>	CLASS I
<b>Efficacy (Rated) (lm/w)</b>	63
<b>Total power consumption (W)</b>	24

## SylCircle SYLCIRCLE 24W 1500LM 0043283

Voltage (V)


220-240

### PHOTOMETRY


0.5	1.61	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	1837 120
1.0	3.23	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	409 30
1.5	4.84	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	182 13
2.0	6.45	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	102 7
2.5	8.06	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	66 5
3.0	9.68	E <sub>10'</sub> E <sub>1(C0)</sub>	98.2°	46 3

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 116.4°)

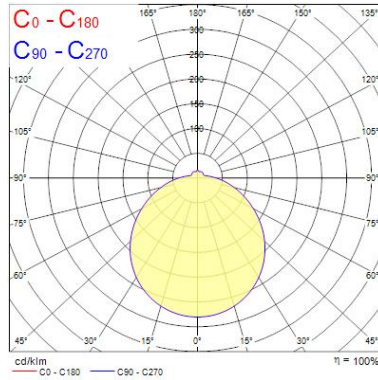

### TECHNICAL DRAWINGS




SYLVANIA 0043283

This luminaire contains built in LED lamps.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**LED**

874/2012

 This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**LED**

**SYLVANIA** 0043283 874/2012