





TIKASHYLLY KS20




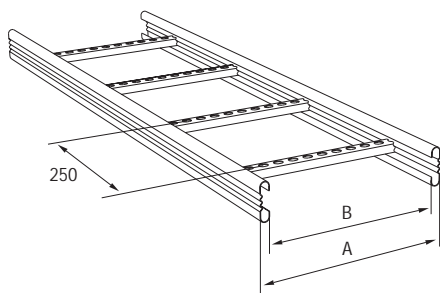


TUOTE	SSTL- NUMERO	VARASTO- PAKKAUS	PAINO KG /100 M	A mm	B mm	PITUUS
Kuumasinkitty ohutlevy						
KS20-200	14 495 02	60m	212	197	167	6 m
KS20-300	14 495 03	60m	232	297	267	6 m
KS20-400	14 495 04	60m	252	397	367	6 m
KS20-500	14 495 05	60m	272	497	467	6 m
KS20-600	14 495 06	60m	292	597	567	6 m
Kuumasinkitty ohutlevy						
KS30-200	14 495 12	40 m	212	197	167	4 m
KS30-300	14 495 13	40 m	232	297	267	4 m
KS30-400	14 495 14	40 m	252	397	367	4 m
KS30-500	14 495 15	40 m	272	497	467	4 m
KS30-600	14 495 16	40 m	292	597	567	4 m
Kuumasinkitty ohutlevy						
KS35-200 L=3000	14 494 01	30 m	212	197	167	3 m
KS35-300 L=3000	14 494 02	30 m	232	297	267	3 m
KS35-400 L=3000	14 494 03	30 m	252	397	367	3 m
KS35-500 L=3000	14 494 04	30 m	272	497	467	3 m
KS35-600 L=3000	14 494 05	30 m	292	597	567	3 m
Kuumasinkitty ohutlevy ja maalaus						
PEX KS20-200	14 311 02	60 m	212	197	167	6 m
PEX KS20-300	14 311 03	60 m	232	297	267	6 m
PEX KS20-400	14 311 04	60 m	252	397	367	6 m
PEX KS20-500	14 311 05	60 m	272	497	467	6 m
PEX KS20-600	14 311 06	60 m	292	597	567	6 m
Kuumasinkitty ohutlevy ja maalaus						
PEX KS30-200	14 311 12	40 m	212	197	167	4 m
PEX KS30-300	14 311 13	40 m	232	297	267	4 m
PEX KS30-400	14 311 14	40 m	252	397	367	4 m
PEX KS30-500	14 311 15	40 m	272	497	467	4 m
PEX KS30-600	14 311 16	40 m	292	597	567	4 m

Kuormitus

Valitse kannatusväli alla olevien kuormituskäyrien avulla.

KUORMITUSKÄYRÄT

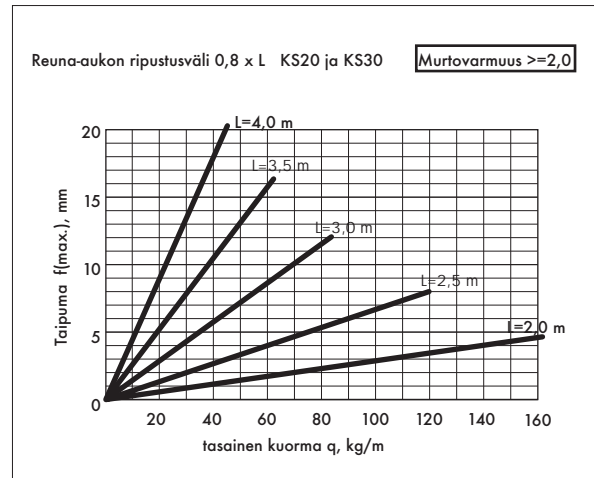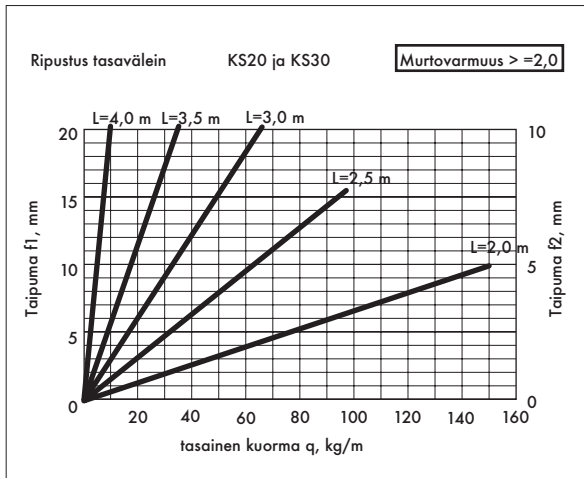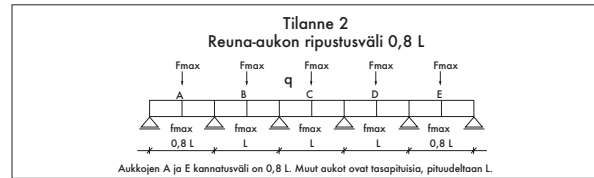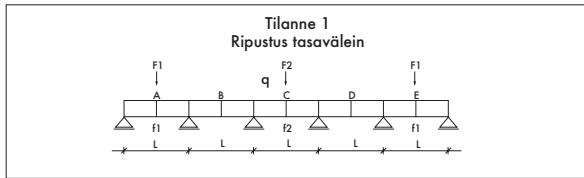

Katso kuormituskäyrien lukuohje sivulta 11.