
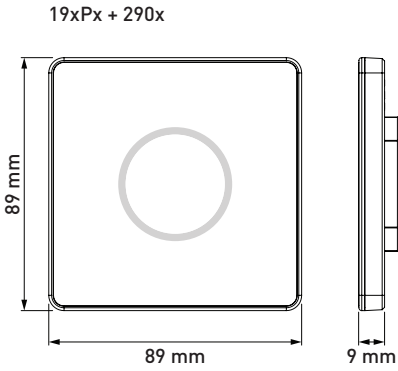


Helvar Ltd

Hawley Mill
Hawley Road
DARTFORD
DA2 7SY
United Kingdom

www.helvar.com

Doc. çççççççç, issue 1, 2016-12-05

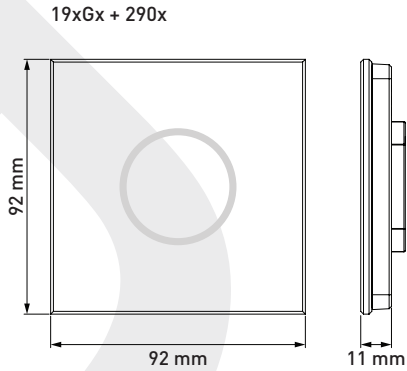

CE

ILLUSTRIS Panels
Front Fascia (19xxx)



Installation Guide

MOUNTING FRONT FASCIA
TO ILLUSTRIS DALI INTERFACE

Mounting front fascia to DALI Interface • Mounting front fascia to DALI Interface • Mounting front fascia to DALI Interface • Mounting front fascia to DALI Interface • Mounting front fascia to DALI Interface


1.




ISOLATE
POWER!
ISOLATE
POWER!
ISOLATE
POWER!

2.

Helvar 290x

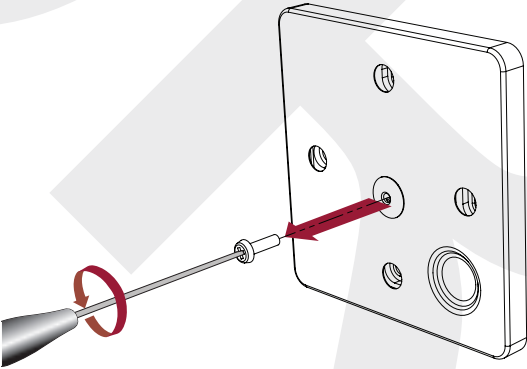


3.

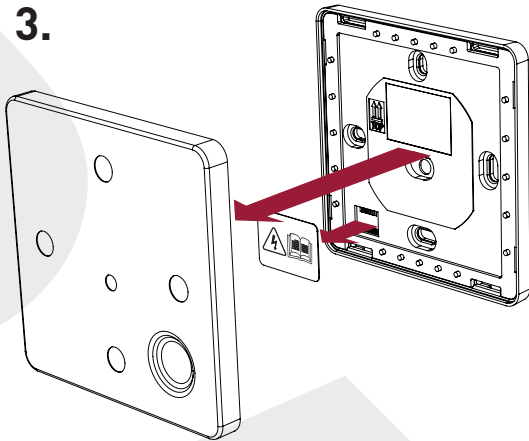

Helvar 19xxx

4.

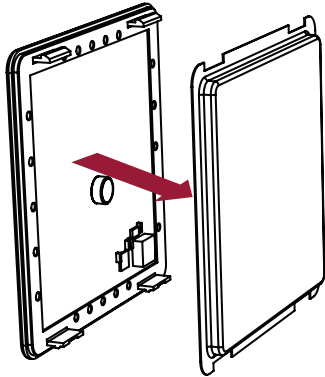

ILLUSTRIS Panels Front Fascia (19xxx)


ILLUSTRIS Panels Front Fascia (19xxx)

ILLUSTRIS Panels Front Fascia (19xxx)


ILLUSTRIS Panels Front Fascia (19xxx)

ILLUSTRIS Panels Front Fascia (19xxx)

5.




6.

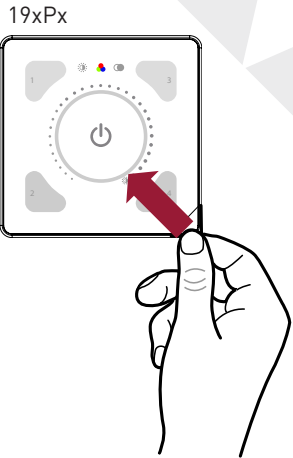


LOCKING PANEL

Locking panel • Locking panel • Locking panel • Locking panel • Locking panel

1.

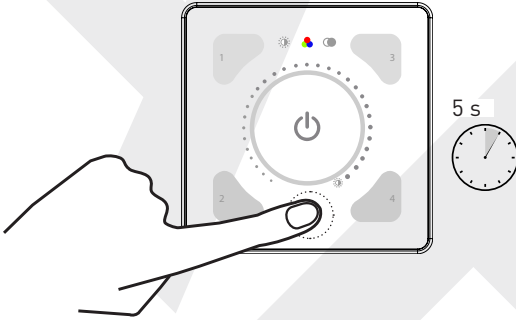


2.



LOADING DEFAULT SCENES


Loading default scenes • Loading default scenes • Loading default scenes • Loading default scenes • Loading default scenes

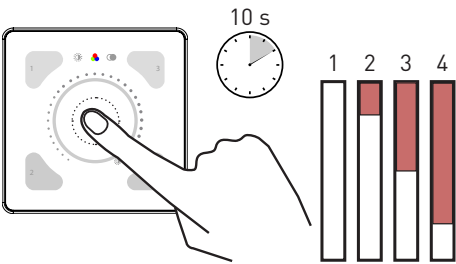

RECALLING SCENES

Recalling Scenes • Recalling Scenes • Recalling Scenes • Recalling Scenes • Recalling Scenes


1.



EDITING SCENES

Editing Scenes • Editing Scenes • Editing Scenes • Editing Scenes • Editing Scenes

2.

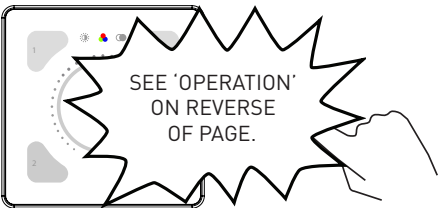


See "Operation" on reverse page. • See "Operation" on reverse page. • See "Operation" on reverse page. • See "Operation" on reverse page. • See "Operation" on reverse page.

STORING SCENES

Storing Scenes • Storing Scenes • Storing Scenes • Storing Scenes • Storing Scenes


3.




REMOVING FRONT FASCIA

1.

Removing front fascia • Removing front fascia • Removing front fascia • Removing front fascia • Removing front fascia

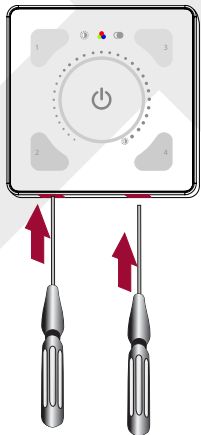


2.



OPERATION

Operation • Operation • Operation • Operation • Operation

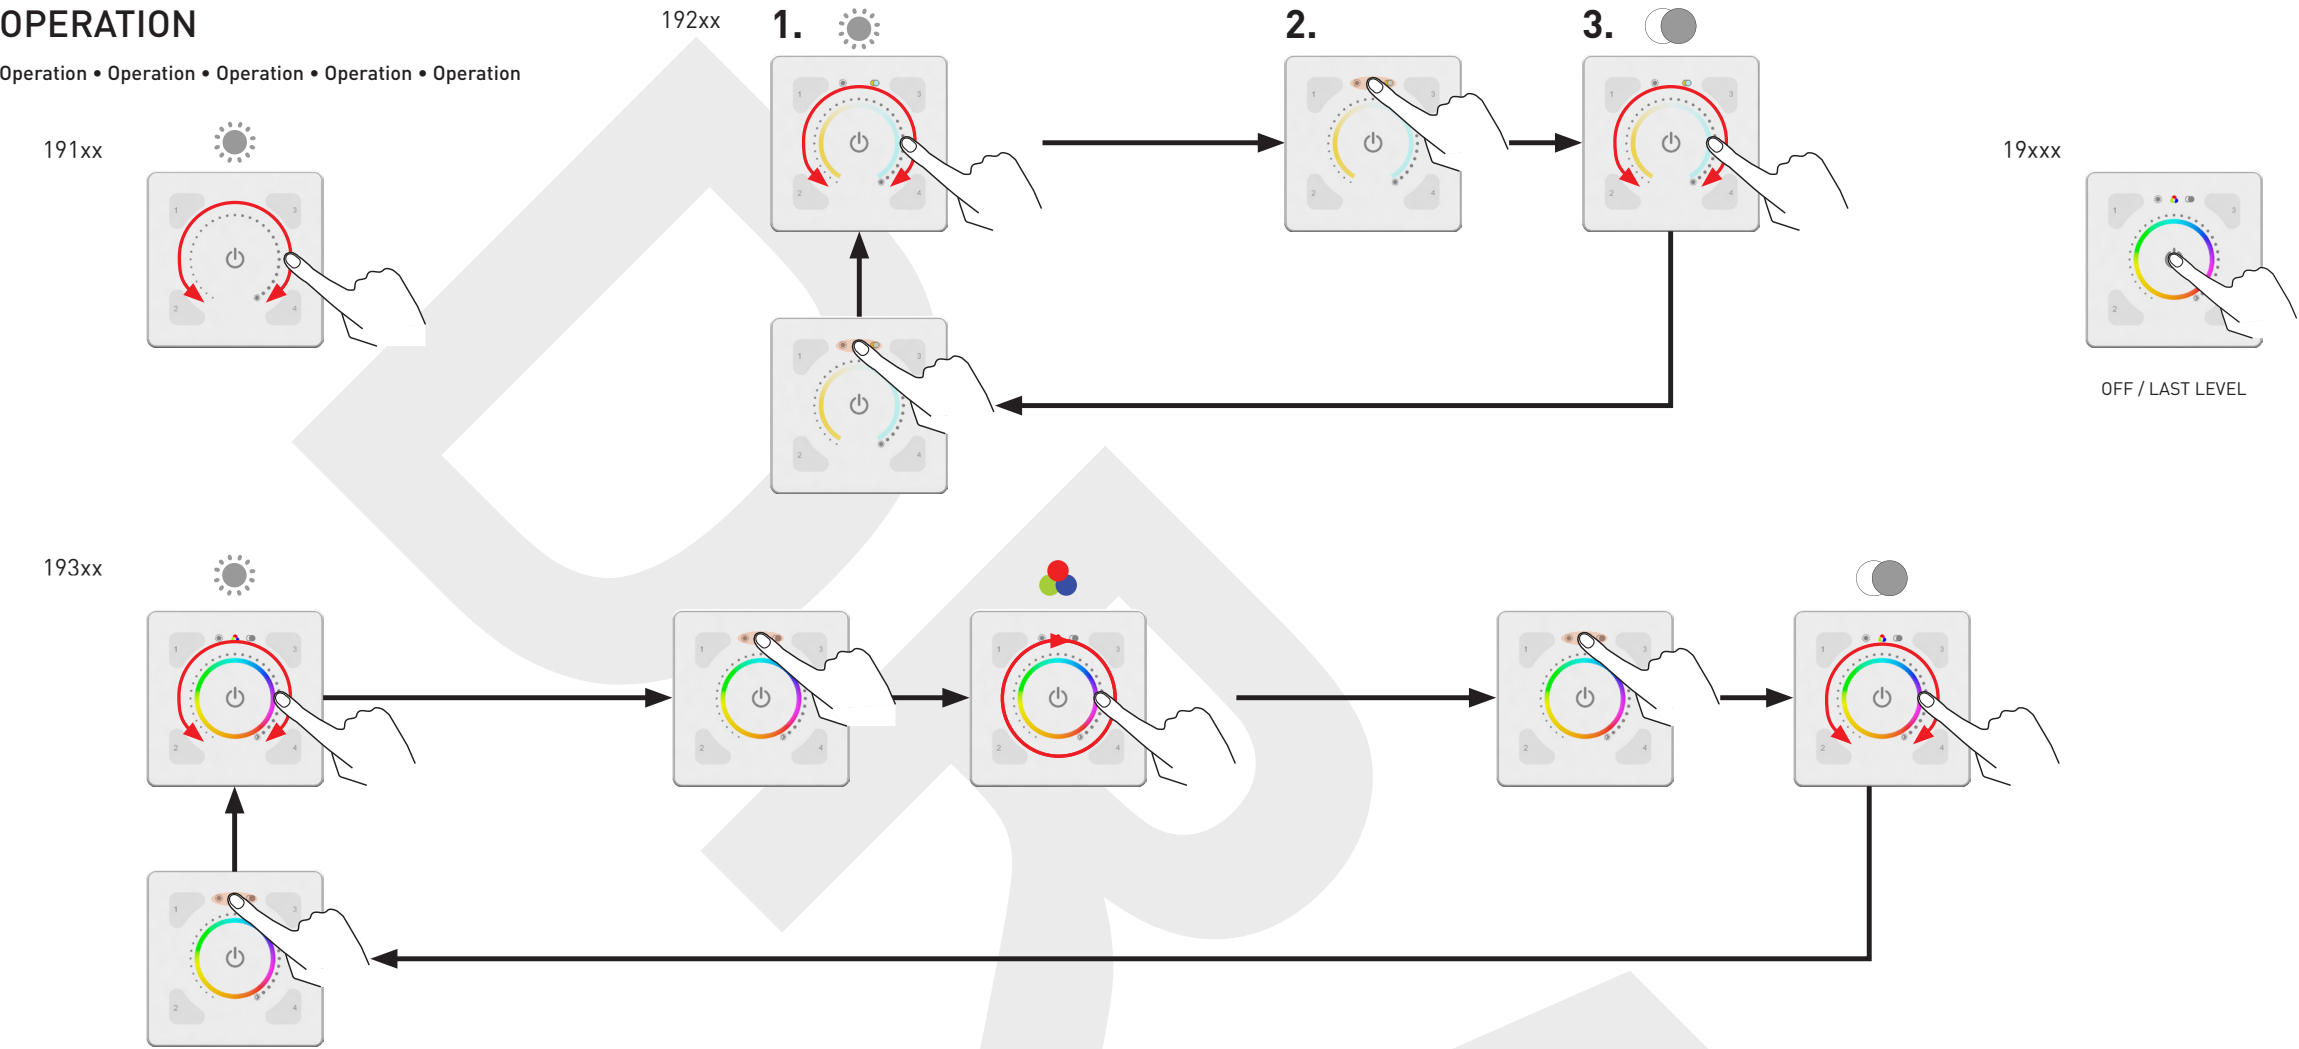

FI Tekniset tiedot

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.

SV Tekniska Data

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.

IT Dati tecnici

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.

DE Technische Daten

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.

EN Technical Data

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.

FR Données techniques

Connections	
DALI cable:	Push-fit terminals. Wire size: 0.5 mm ² – 1.5 mm ² solid or stranded.
Cable rating:	All cables must be mains rated.
Power	
DALI supply input:	9.5 V to 22.5 V
DALI consumption:	Typical: 22 mA @ 16 V Maximum: 40 mA @ 9.5 V
Radio operation:	
Wireless connectivity:	Bluetooth® Smart™
Mechanical data	
Dimensions:	19xGx: 92 mm × 92 mm 19xPx: 89 mm × 89 mm 290x: 89 mm × 89 mm
Weight:	19xGx: 150 g 19xPx: 90 g 290x: 50 g
Material:	
19xGx: Glass 19xPx: Acrylic (PMMA) 290x: Flame-retardant PC/ABS	
IP code:	IP30
Operating conditions	
Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	–10 °C to +70 °C
Conformity and standards	
DALI standard:	IEC 62386
EMC:	EN 301489-1 EN 55015 EN 61547
Safety:	60669-2-1
Environment:	Complies with WEEE and RoHS directives.
FCC:	Contains FCC ID: WAP2005.