

VECTOR

S - Series

Uppeasennettavat valaisimet

 AURA LIGHT





Puristettu alumiinirunko


Korkeakiiltoinen opaali PC diffuusori

MacAdam 3

Sensori, DALI, SwitchDim ja hätäversiot



Upotettavat valaisimet

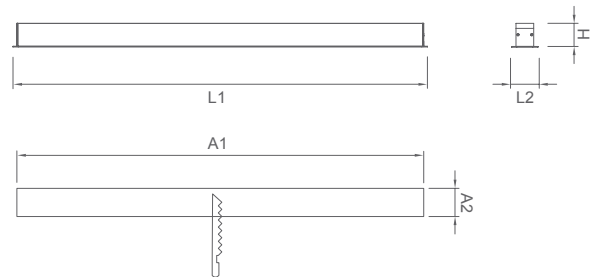

Teho (W)	Valoteho (lm)	Tehokkuus (lm/W)	CRI (Ra)	Väriämpötila (K)	Mitat (mm)					Paino (kg)	Tuotenro.
					A1	A2	L1	L2	H		
26W	1940	75	>80	3000	1140	62	1160	82	75	2,0	341 0 113 3 141
26W	2030	78	>80	4000	1140	62	1160	82	75	2,0	341 0 113 4 141
40W	2920	73	>80	3000	1700	62	1720	82	75	2,4	341 0 169 3 141
40W	3050	76	>80	4000	1700	62	1720	82	75	2,4	341 0 169 4 141

- (100) 1h hätäversio
- (010) DALI
- (003) ILD Sensori