

UNIQUE-T / E - 18 W - 26 W

Nominal wattage (W)	18			26		
Nominal length (mm)	99,5			113,5		
Width (mm)	41			41		
Tube diameter (mm)	13			13		
Weight (g)	69			78		
Colour Rendering Index CRI	≥ 80			≥ 80		
Temp. for max. luminous flux (°C)	25			25		
Light Colour	827	830	840	827	830	840
Correlated Colour Temp. CCT (K)	2700	3000	4000	2700	3000	4000
Nominal Luminous flux ¹⁾ @ 25 °C (lm)	1200	1200	1200	1800	1800	1800
Lamp efficacy ¹⁾ @ 25 °C (lm/W)	67	67	67	69	69	69
Energy Class	A	A	A	A	A	A
kW/1000 hrs	19,8	19,8	19,8	28,6	28,6	28,6

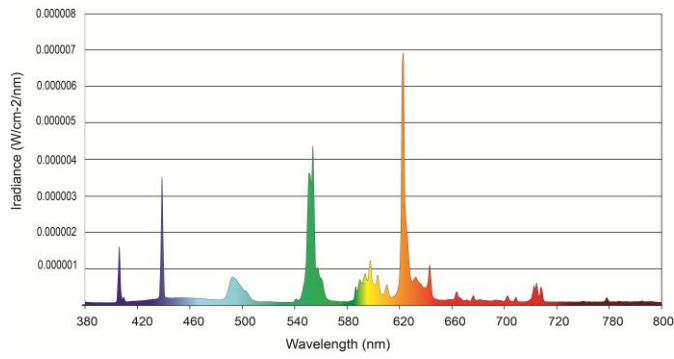
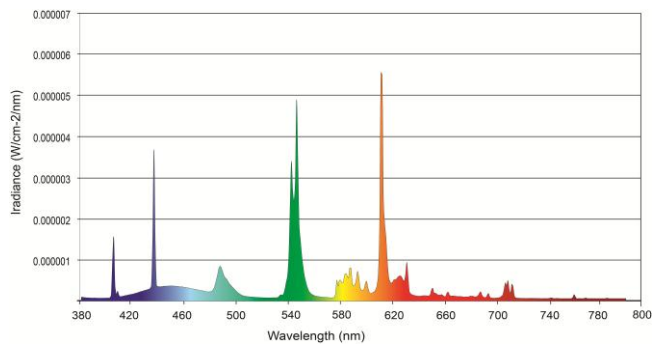
Electrical Data	Elect. ²⁾	Rated Wattage (W)	18	26
		Lamp voltage (V)	80	80
		Lamp current (A)	0.210	0.300

LLMF - Lamp Lumen Mainte. Factor - Elect	2,000 h	0,99
	4,000 h	0,97
	6,000 h	0,94
	8,000 h	0,9
	12,000 h	0,86
	16,000 h	0,85
	20,000 h	0,85
	30,000 h	0,85
LSF - Lamp Survival Factor - Elect	2,000 h	1
	4,000 h	1
	6,000 h	1
	8,000 h	1
	12,000 h	0,99
	16,000 h	0,98
	20,000 h	0,97
	30,000 h	0,9

Dimmable	Yes	
Cap	GX24q-2	GX24q-3
Mercury content (mg)	2,5	
IEC	60901	

Life time	Service life	Operation
Switching cycle		Electronic
3 h (2 h 45 min on, 15 min off)		24,000 h
12 h (11 h on, 1 h off)	90 % survivals (12B10)	30,000 h
	average life time (12B50)	42,000 h

1) after 100 h
2) Magnetic Ballast

Spectral distribution 830

Spectral distribution 840


Packing data	18 W	26 W
Box size (mm)	<i>n.av.</i>	<i>n.av.</i>
Lamps per box (pcs)	50	50
Weight per box (kg)	3,8	4,3