


Fluke TC03A /  
TC03A PRO

Thermal Camera for Smart Device  
Instructions

| Model                | USB Port | System        |
|----------------------|----------|---------------|
| TC03A /<br>TC03A PRO | Type-C   | Android<br>OS |

Limited  
2-Year  
Warranty

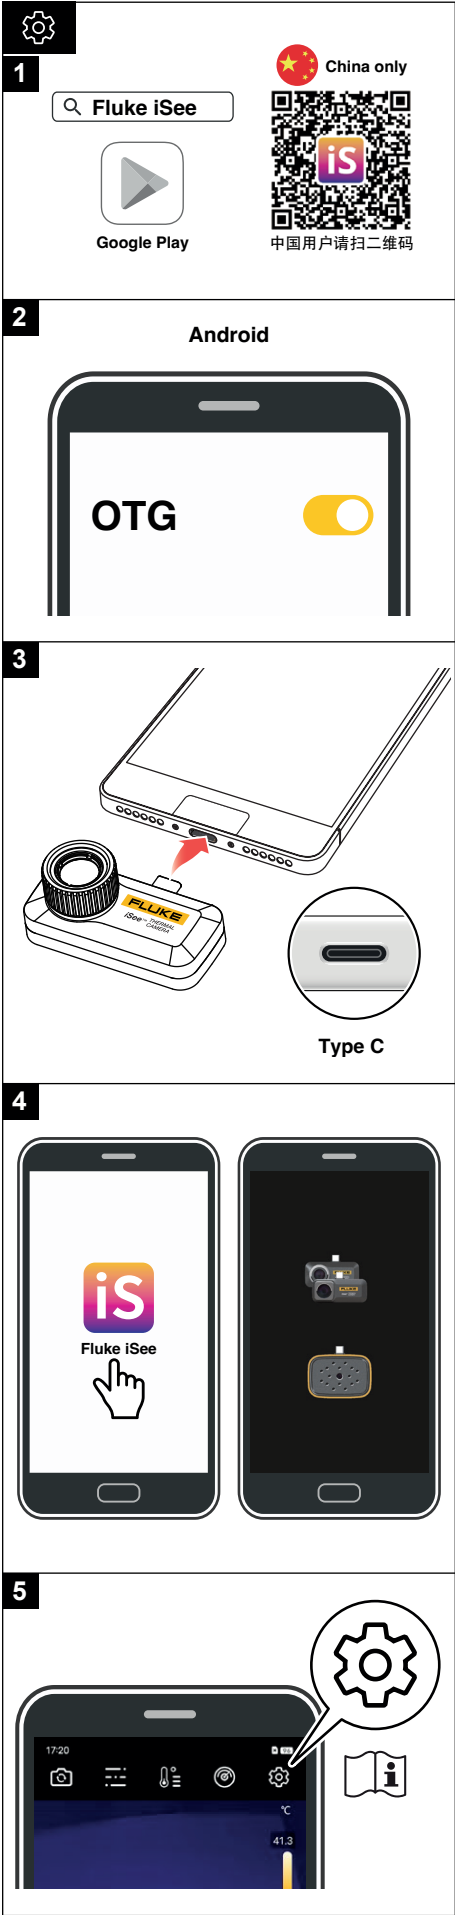

(English)

2-Year Limited Warranty.  
See the Users Manual for the full warranty.

Contact Fluke

Go to [www.fluke.com](http://www.fluke.com) to register your Product, read the Users Manual, and find more information.

Fluke Corporation operates worldwide. For local contact information, go to our website: [www.fluke.com](http://www.fluke.com).

Warning

- Carefully read all instructions.
- Read all safety information before you use the Product.
- Do not alter the Product and use only as specified, or the protection supplied by the Product can be compromised.
- Do not use the Product if it operates incorrectly.
- Do not use the Product around explosive gas, vapor, or in damp or wet environments.
- See emissivity information for actual temperatures. Reflective objects result in lower than actual temperature measurements. These objects pose a burn hazard.
- Avoid external force subjected to the connector.
- The product cannot be used for any medical measurement.
- To avoid damage to the infrared sensor, do not aim the product to the sun or other objects whose temperature is higher than the measuring range.
- Do not forcibly plug or trying to disassemble the product.
- Do not use any ammonia or detergent containing ammonia to clean the lens. This may cause permanent damage to the lens.

Symbols

| Symbol | Description                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CE     | Conforms to European Union directives.                                                                                                                                                                                                                                                                                                                                                                                                              |
|        | This Product has electronic printed circuit boards. Dispose of the Product in a professional and environmentally appropriate manner. Delete personal data on the Product before disposal. Remove batteries that are not integrated into the electrical system before disposal and dispose of batteries separately. If this Product has an integral battery, put the entire Product in the electrical waste. See Contact Fluke for more information. |

Specifications

General Specifications

Operating Temperature.....0 °C to +40 °C  
(32 °F to 104 °F)

Storage Temperature.....-30 °C to +60 °C  
(-22 °F to 140 °F)

Operating Humidity ..... 10% to 90% RH,  
Non condensing (<10 °C)

Ingress Protection  
(IP) Rating .....IEC 60529: IP54  
(connector covered)

Operating Altitude .....2000 m

Storage Altitude .....12000 m

EMC.....IEC 61326-1: Portable  
Electromagnetic  
Environment  
CISPR 11: Group 1, Class A

*Group 1: Equipment has intentionally generated and/or uses conductively-coupled radio frequency energy that is necessary for the internal function of the equipment itself.*

*Class A: Equipment is suitable for use in all establishments other than domestic and those directly connected to a lowvoltage power supply network that supplies buildings used for domestic purposes. There may be potential difficulties in ensuring electromagnetic compatibility in other environments due to conducted and radiated disturbances.*

*Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.*

Korea (KCC).....Class A equipment  
(Industrial Broadcast  
& Communications  
Equipment)

*Class A: Equipment meets requirements for industrial electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and not to be used in homes.*

USA (FCC).....47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103.

Key Performance

Image Resolution.....384 x 288

Measuring Range .....-20 °C to 550 °C  
(-4 °F to 1022 °F)

Accuracy.....± 2% of reading / ±2 °C (±3.6 °F),  
whichever is greater (at 23 ±5 °C,  
73 ±9 °F ambient)

Frame Rate.....**TC03A:** 25 Hz / 9Hz  
**TC03A PRO:** 50Hz



PN 6129058, 3/2026, Rev. 1, 6/2026

© 2026 Fluke Corporation. All rights reserved. Specifications are subject to change without notice. All product names are trademarks of their respective companies.