



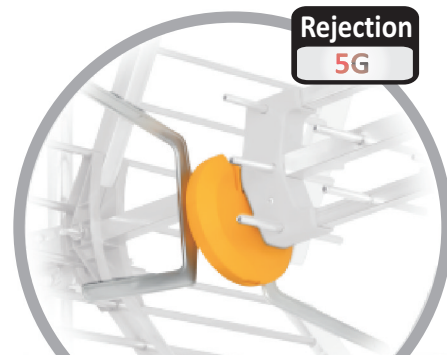


MADE IN PORTUGAL

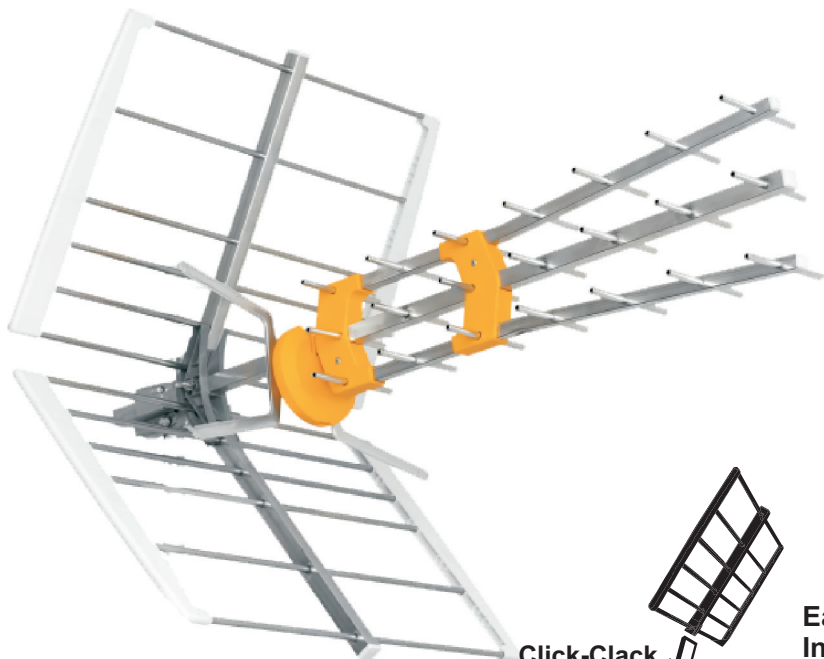

Rejection
5G

Dipole
Passive / Active

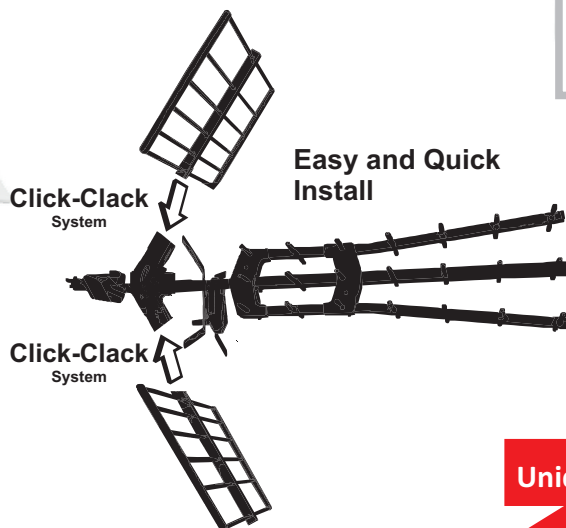


20x20



Reforced aluminum structure

Unique in the market



Supplied 5V directly by receiver or LCD ,
or 12V ... 24V from external power supply.

REF.	TDT 4545/A-5G	
CHANNELS	21/48	
FREQUÊNCIA	MHz	470/694
GAIN	dB	Active - 39 Passive - 17
RECOMMENDED INPUT SIGNAL	dBµV	<82
POWER SUPPLY	5V...24V	
CONSUMPTION	5V / 25mA 12V..24V / 45mA	
H/V BEAM WIDTH		32/39
FRONT/BACK RATIO	dB	25
CONNECTION	"F" Connectors	
IMPEDANCE	75	
WINDLOAD	N 130km/h	118
LENGTH / WEIGHT	cm/Kg	91 / 1,6

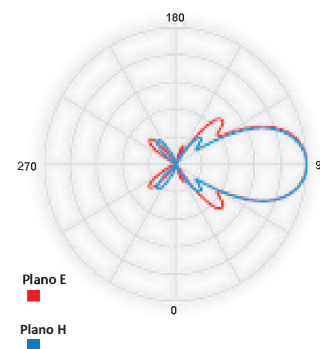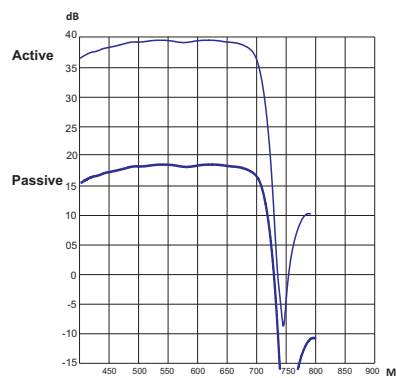

DVB-T
TERRESTRIAL

Easy and Quick
Install



Plastic
with

