




Palonrajoitinventtii




KSUB



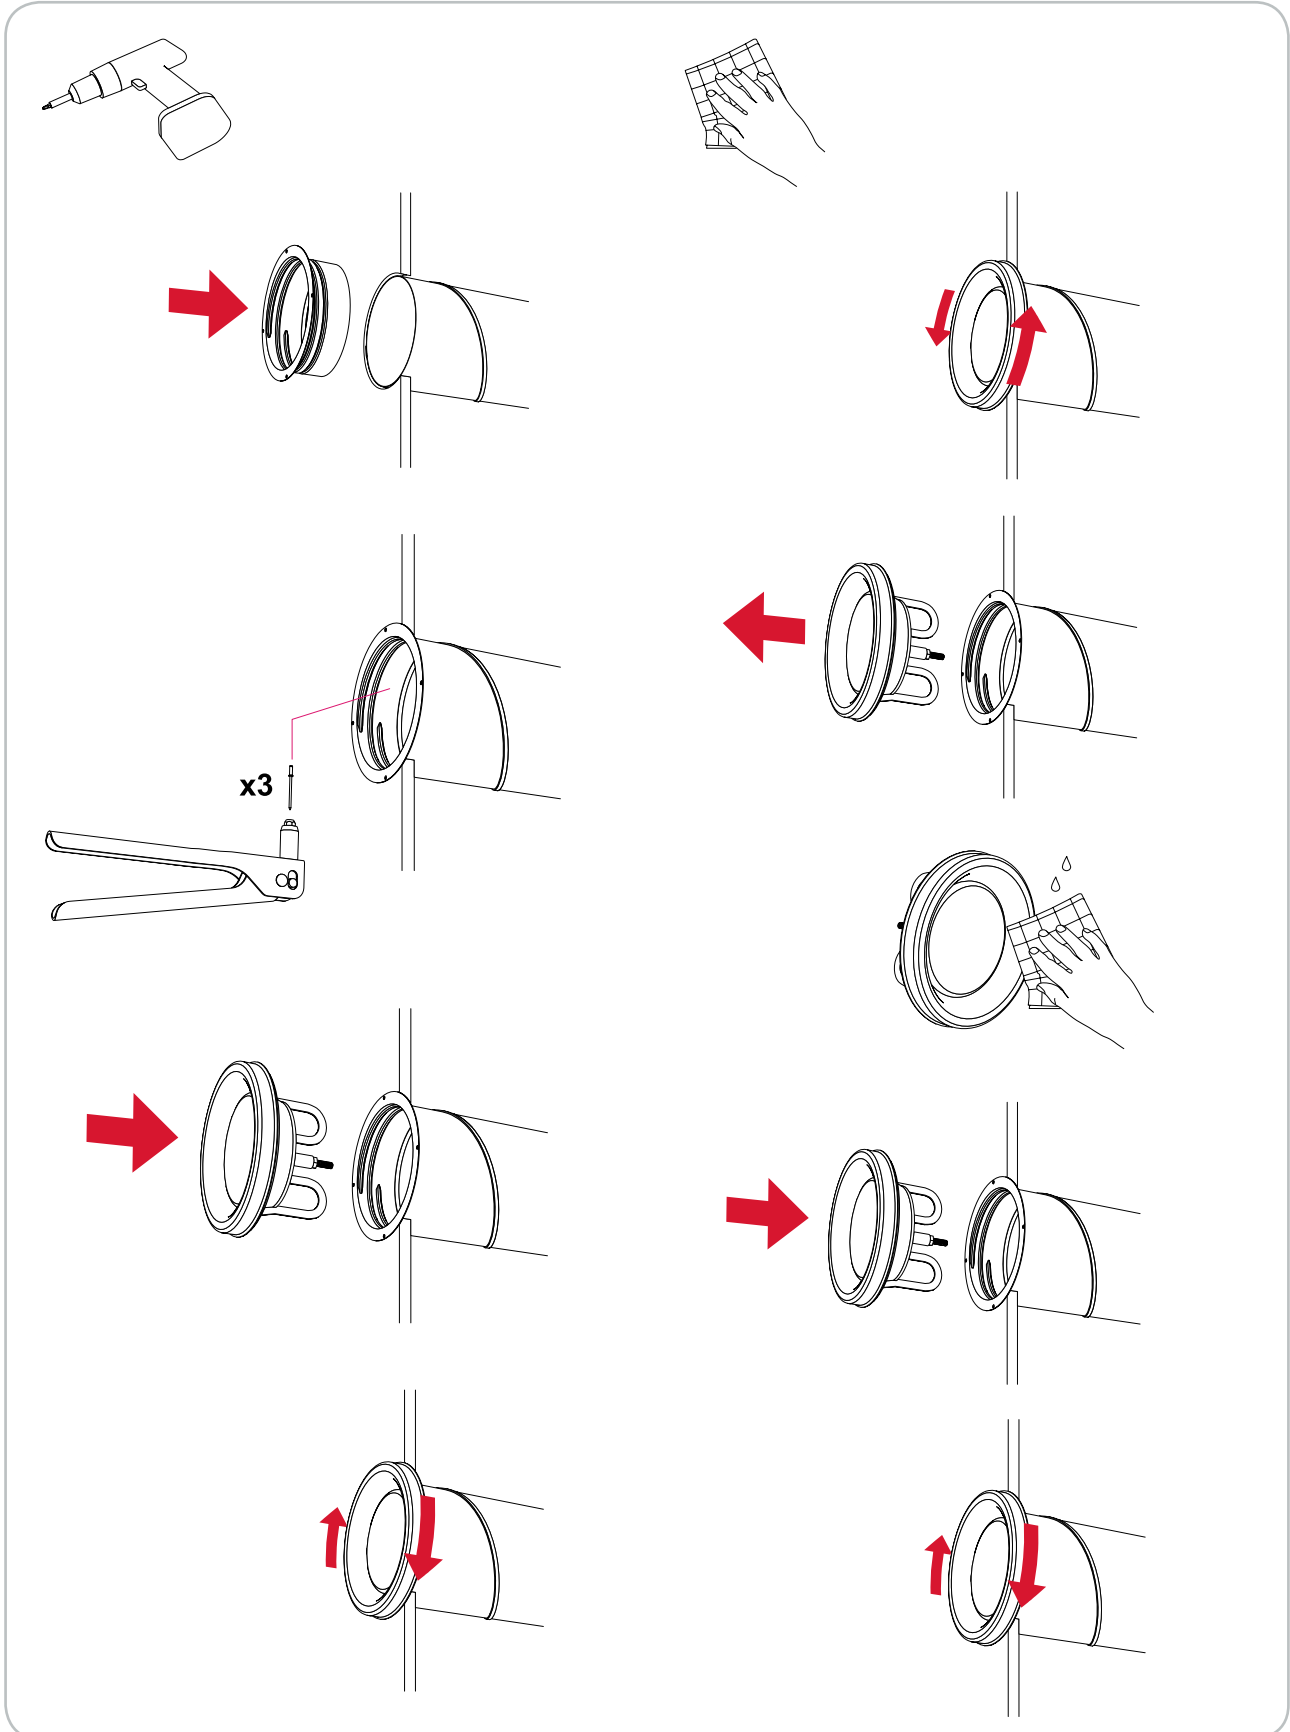

Palonrajoitinventtii

KSUB

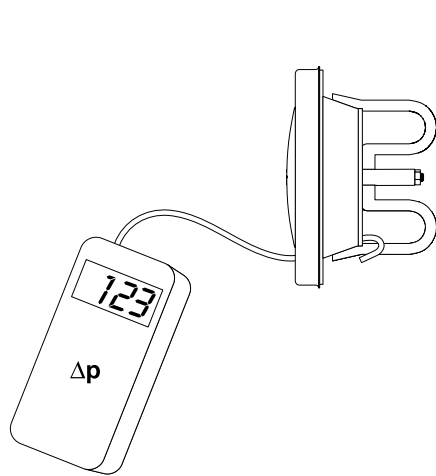

Ø mm	Venttiili mounted in	Asento a [mm]								
		a	-15	-12	-10	-5	0	5	10	
	Kanava 100 Käyrä 90° T-haara	a	0,459	0,676	0,861	1,36	1,82	2,32	2,75	
		k	0,505	0,841	1,00	1,40	1,86	2,35	2,77	
			0,576	0,850	1,01	1,42	1,89	2,35	2,66	
	Kanava 125 Käyrä 90° T-haara	a	-10	-5	0	5	10			
		k	1,29	1,93	2,59	3,29	3,91			
			1,24	1,90	2,61	3,33	3,90			
	Kanava 150 Käyrä 90° T-haara	a	-10	-5	0	5	10	15		
		k	1,81	2,69	3,42	4,48	5,17	6,09		
			2,01	2,75	3,47	4,37	5,29	6,21		
	Kanava 160 Käyrä 90° T-haara	a	-10	-5	0	5	10	15		
		k	1,80	2,62	3,62	4,57	5,58	6,46		
			1,50	2,50	3,48	4,50	5,39	6,52		
	Kanava 200 Käyrä 90° T-haara	a	-3	0	5	10	15			
		k	2,02	2,72	3,85	5,19	6,32			
			1,65	2,62	3,71	5,21	6,07			