

BA050L SpiroVent Deaerator DN 50 Weld end

Specifications

| | |
|---------------------|------------------------------------|
| ArticleNr | BA050L |
| Product description | SpiroVent Deaerator DN 50 Weld end |
| Paint | Standard |
| Color | Yellow (RAL 1003) |
| Description | SpiroVent |
| Volume | 5 Ltr. |
| Dry weight | 10 Kg |

Design Criteria


| | |
|------------------|-------------------------|
| Medium | Water /glycol (max 50%) |
| Max. flow rate | 12,5 m ³ h |
| Max. pressure | 10 bar-g |
| Max. temperature | 110 °C |

Testing & Quality assurance

| | |
|--|--------------|
| Test pressure | 7 bar-g |
| Test medium | Air |
| Test certificate | no |
| Design & manufacturing acc. 97/23/ EC | PED Art. 3.3 |

Construction Materials

| | |
|--------------------|-----------------------------------|
| Separation element | Spirotube - copper + carbon steel |
| Deaeration cap | Brass |
| Housing | Carbon steel |

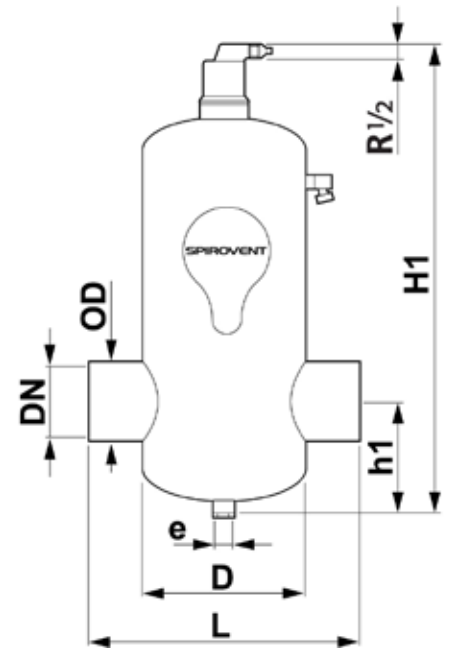

Dimensions

| | | |
|----|---------|----|
| DN | 50 (2") | mm |
| D | 159 | mm |
| H | 470 | mm |
| OD | 60,3 | mm |
| h1 | 115 | mm |
| L | 260 | mm |