


Ø5
DIA 0,20

M4
3Nm
26,6 Lb.-in.


EN 50023
EN 50022

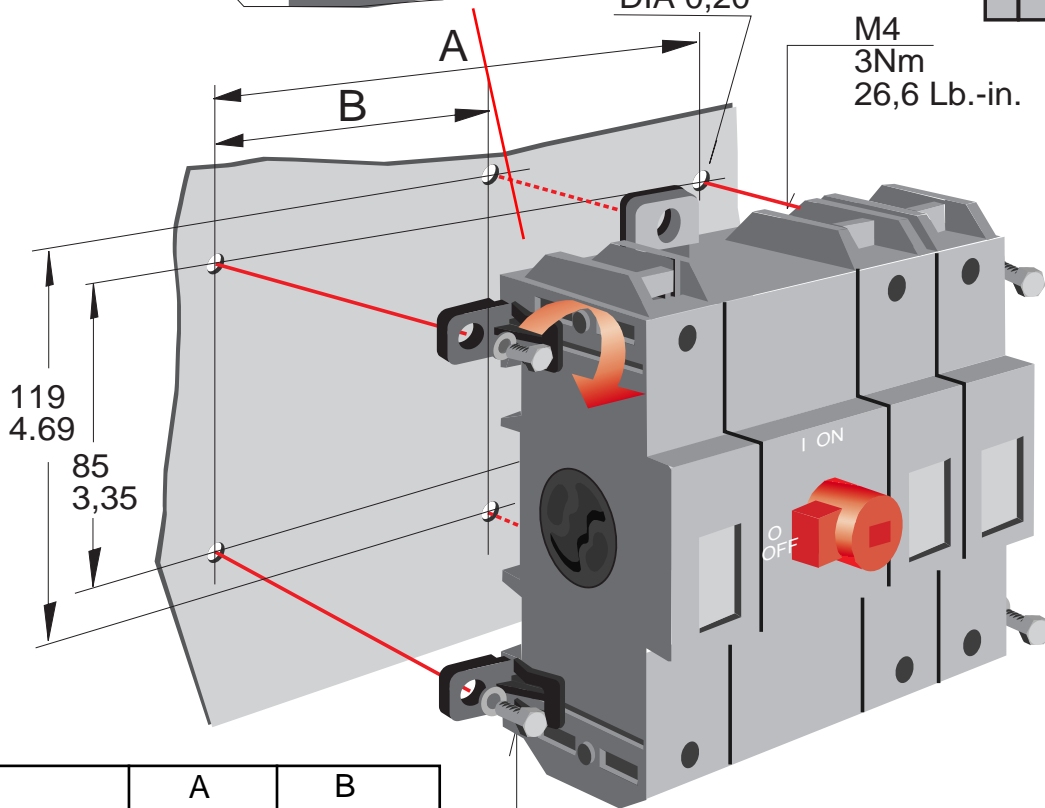

119
4.69

85
3.35

M4
3Nm
26,6 Lb.-in.

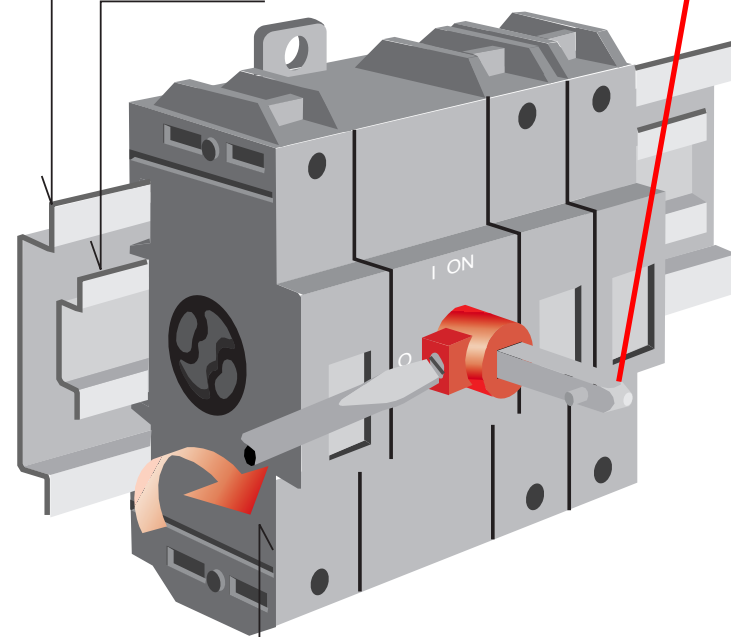

Max. 1 Nm
8,9 Lb.-in.

	A	B
OT 160E3	144 / 5.67	58.5 / 2.30
OT 160E4	171 / 6.74	85,5 / 3.37