


# TYTON SIT PLUS® Fitting Instructions



## Dimensions of Sockets and Accessories

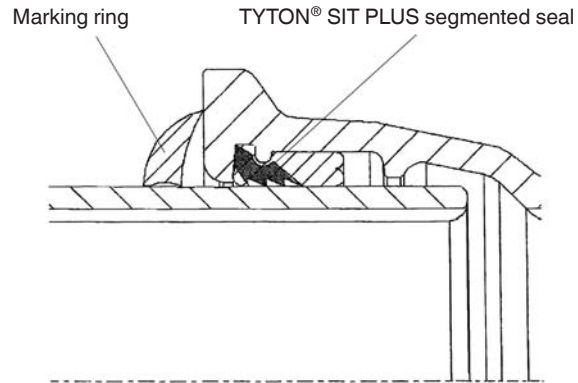

DN	PFA in bar	Number of Locking Segments	Permissible Offsetting	TYTON® SIT PLUS Seal Weight in kg
80	32	4	3°	0,2
100	32	5	3°	0,3
125	25	5	3°	0,3
150	25	7	3°	0,4
200	25	10	3°	0,5
250	25	15	3°	0,7
300	25	20	3°	1,0
400	16	28	2°	1,7
500	16	35	2°	2,6
600	10	42	2°	3,8

PFA – permissible component working pressure