


**W-Series
WTL 4/STB**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

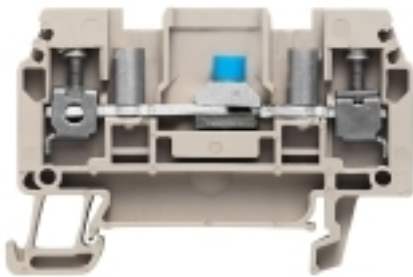

Special instruments are required for measuring electrical energy. One wrong connection during maintenance work is enough to ruin a current transformer! Disconnect test terminals represent a reliable way of solving this problem. As a leading supplier of line connectors, Weidmüller has developed special disconnect test terminals in close cooperation with users. These modular terminals ensure optimum realisation of all important circuits for the measurement of current, voltage and energy. Different current transformer circuits, e.g. for replacing measuring instruments or electricity meters, can be implemented. Besides disconnect test terminals with screw or tension clamp connections, Weidmüller also has a comprehensive range of accessories, including test adapters, cross-connections and markers for the testing of 3-phase and AC circuits as well as voltages.

General ordering data

Type	WTL 4/STB
Order No.	1754970000
Version	W-Series, Test-disconnect terminal, Rated cross-section: 4 mm ² , Screw connection
GTIN (EAN)	4032248054534
Qty.	50 pc(s).

**W-Series
WTL 4/STB**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	6.1 mm	Height	61.3 mm
Height of lowest version	40.7 mm	Depth	39.9 mm
Weight	99 g	Net weight	13.2 g

Temperatures

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

2 clampable wires (H05V/H07V) same cross-section (rated connection)

Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm ²	Wire cross-section, finely stranded, two clampable wires, max.	1.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	1.5 mm ²

Additional technical data

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on
Version	Screw connection, Disconnection element, with sockets, for screwable cross-connection, One end without connector		

CSA ratings data

Certificate No. (CSA)	200039-1057876	Voltage size B (CSA)	300 V
Voltage size D (CSA)	300 V	Current size B (CSA)	28 A
Current size D (CSA)	10 A	Wire cross section max. (CSA)	10 AWG
Wire cross section min. (CSA)	26 AWG		

Clampable wires (additional connection)

Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, min.	0.5 mm ²	Conductor cross-section, flexible plus plastic collar DIN 46228/1, further connection, max.	4 mm ²
---	---------------------	---	-------------------

**W-Series
WTL 4/STB**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Clampable wires (rated connection)**

Type of connection	Screw connection	Stripping length	10 mm
Blade size	0.6 x 3.5 mm	Connection direction	on side
Number of connections	2	Clamping range, rated connection, min.	0.13 mm ²
Clamping range, rated connection, max.	6 mm ²	Clamping screw	M 2.5
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.7 Nm
Torque level with DMS electric screwdriver	1	Gauge to IEC 60947-1	A3
Wire connection cross section, solid core, min. rated connection	0.5 mm ²	Wire connection cross section, solid core max. rated connection	6 mm ²
Wire connection cross section, stranded, rated connection, min.	1.5 mm ²	Wire connection cross section, stranded, rated connection, max.	4 mm ²
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm ²	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	4 mm ²
Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	4 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 10

Disconnect terminals

Cross-disconnect	sliding	Integral test socket	Yes
Slitting	sliding	Tightening torque, max.	0.7 Nm
Tightening torque, min.	0.4 Nm	Torque level with DMS electric screwdriver	1

Rated data

Rated cross-section	4 mm ²	Rated voltage	500 V
Rated impulse withstand voltage	6 kV	Rated current	32 A
Current at maximum wires	41 A	Pollution severity	3

UL ratings data

Certificate No. (UR)	E60693	Voltage size C (UR)	300 V
Current size C (UR)	28 A	Conductor size Factory wiring max. (UR)	10 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	10 AWG

Material data

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

System specifications

Product family	W-Series	Type of connection	Screw connection
Connection direction	on side	Number of levels	1
Number of connections	2	No. of clamping points per level	2
Levels cross-connected internally	No	Mounting rail	TS 35
End cover plate required	Yes		

Data sheet

**W-Series
WTL 4/STB**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Classifications

ETIM 3.0	EC000902	UNSPSC	30-21-18-11
eClass 5.1	27-14-11-26	eClass 6.2	27-14-11-26
eClass 7.1	27-14-11-26		

Product information

Descriptive text technical data Use as a disconnect terminal with 500 V.

Approvals

Approvals



ROHS Conform

Data sheet

W-Series
WTL 4/STB

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

