


SMKV 7

Cable gland, brass with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

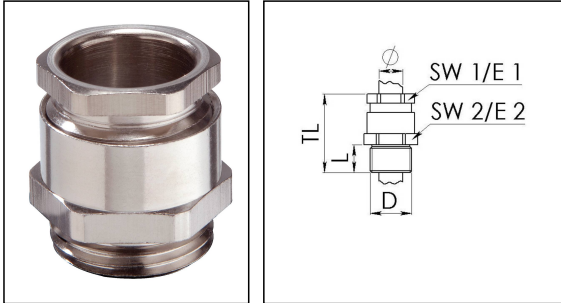

Material cable gland	Brass nickel-plated
Material sealing gasket	Soft rubber
Temp. range min	-40 °C
Temp. range max	70 °C
Intermittent temp. range	100 °C
Protection class	IP 54
Thread type	PG
Connection thread size D	7
Length screw-in thread L	5 mm
Cable diameter min	5 mm
Cable diameter max	7 mm
Key width SW1	16 mm
Key width SW2	14 mm
Collar diameter E1	18 mm
Collar diameter E2	16 mm
Total length TL	20,5 mm
Impact category	6
Surface	Nickel-plated
Order no. nickel-plated	10062061
Type	SMKV 7
Packing unit	100
ETIM-Classification	EC000441

Recommended accessories

MMU 7

10062141

19.11.2014