


SMKV 13,5

Cable gland, brass with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

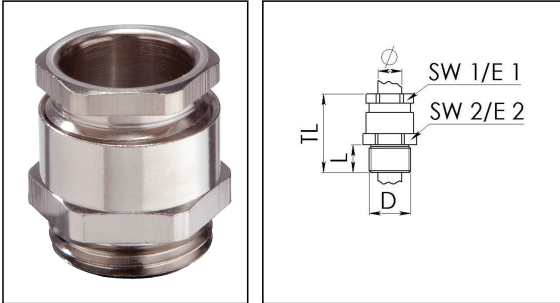

Material cable gland	Brass nickel-plated
Material sealing gasket	Soft rubber
Temp. range min	-40 °C
Temp. range max	70 °C
Intermittent temp. range	100 °C
Protection class	IP 54
Thread type	PG
Connection thread size D	13,5
Length screw-in thread L	6,5 mm
Cable diameter min	6,5 mm
Cable diameter max	13,5 mm
Key width SW1	24 mm
Key width SW2	22 mm
Collar diameter E1	27 mm
Collar diameter E2	24 mm
Total length TL	26 mm
Impact category	6
Surface	Nickel-plated
Order no. nickel-plated	10062084
Type	SMKV 13,5
Packing unit	50
ETIM-Classification	EC000441

Recommended accessories

MMU 13,5

10062144

19.11.2014