


SMKV 16

Cable gland, brass with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

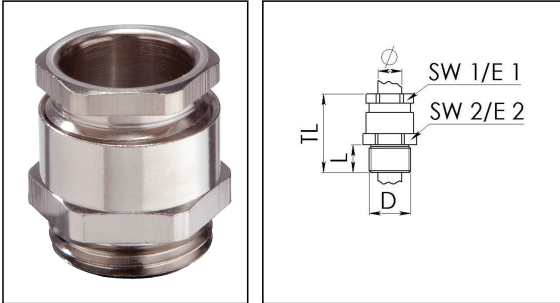

Material cable gland	Brass nickel-plated
Material sealing gasket	Soft rubber
Temp. range min	-40 °C
Temp. range max	70 °C
Intermittent temp. range	100 °C
Protection class	IP 54
Thread type	PG
Connection thread size D	16
Length screw-in thread L	6,5 mm
Cable diameter min	6,5 mm
Cable diameter max	16 mm
Key width SW1	27 mm
Key width SW2	24 mm
Collar diameter E1	30 mm
Collar diameter E2	27 mm
Total length TL	26,5 mm
Impact category	6
Surface	Nickel-plated
Order no. nickel-plated	10062085
Type	SMKV 16
Packing unit	50
ETIM-Classification	EC000441

Recommended accessories

MMU 16

10062145

19.11.2014