


SMKV 36

Cable gland, brass with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

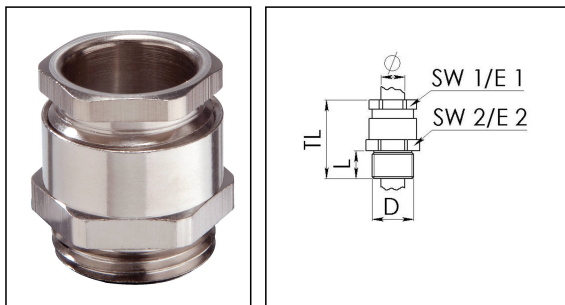

Material cable gland	Brass nickel-plated
Material sealing gasket	Soft rubber
Temp. range min	-40 °C
Temp. range max	70 °C
Intermittent temp. range	100 °C
Protection class	IP 54
Thread type	PG
Connection thread size D	36
Length screw-in thread L	9 mm
Cable diameter min	23 mm
Cable diameter max	34 mm
Key width SW1	52 mm
Key width SW2	50 mm
Collar diameter E1	56 mm
Collar diameter E2	55 mm
Total length TL	39 mm
Impact category	6
Surface	Nickel-plated
Order no. nickel-plated	10062088
Type	SMKV 36
Packing unit	10
ETIM-Classification	EC000441

Recommended accessories

MMU 36

10062148

19.11.2014