


SMKV 48

Cable gland, brass with short thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

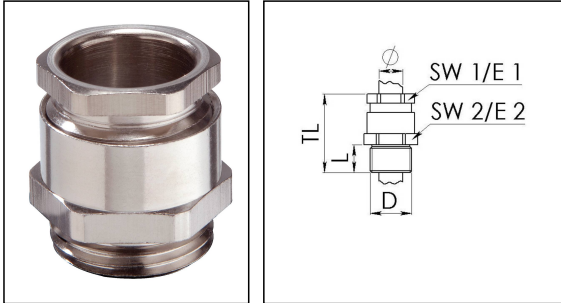

Material cable gland	Brass nickel-plated
Material sealing gasket	Soft rubber
Temp. range min	-40 °C
Temp. range max	70 °C
Intermittent temp. range	100 °C
Protection class	IP 54
Thread type	PG
Connection thread size D	48
Length screw-in thread L	10 mm
Cable diameter min	35 mm
Cable diameter max	46 mm
Key width SW1	64 mm
Key width SW2	64 mm
Collar diameter E1	70 mm
Collar diameter E2	69 mm
Total length TL	45 mm
Impact category	6
Surface	Nickel-plated
Order no. nickel-plated	10062090
Type	SMKV 48
Packing unit	10
ETIM-Classification	EC000441

Recommended accessories

MMU 48

10062150

19.11.2014