


MRM 32/25

Reduction adaptor, brass



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

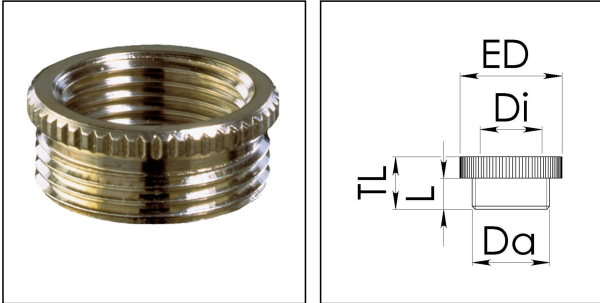

Material	Brass nickel-plated
Temp. range min	-200 °C
Temp. range max	250 °C
Thread type outer	M
Ø outer thread	32
Lead outer	1,5
Length screw-in thread L	8 mm
Thread type inner	M
Connection thread size, inner	25
Lead inner	1,5
External diameter ED	34 mm
Total length TL	11,5 mm
Surface	Nickel-plated
Order no. nickel-plated	10063946
Type	MRM 32/25
Packing unit	50
ETIM-Classification	EC000938

Recommended accessories

EMMU 32	10063145
ORD-E 32	10064701

19.11.2014