



** Now we provide a 5 year guarantee on the purchase of new El-Björn products. Go to our homepage to sign up.*

Final distribution assembly




Product arguments

- Enclosure in powder coated, corrosion-resistant galvanized sheet steel
- Hot-dip galvanized folding frame
- Hinges and outer screws of stainless steel
- Connection of incoming cable is permanent to a terminal block, 4 or 5-conductor systems
- The outlet sockets are preceded by an earth-fault breaker and fuse protected with a miniature circuit breaker type C-characteristic

Article No.: E2467205

Replaces: E1991003

Type: SF 125//106-7 EN SEFI
BEC

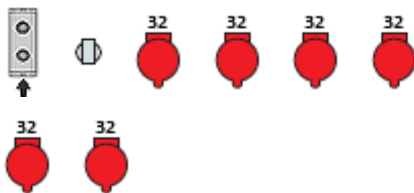

Certifications:



Technical Data, SF 125//106-7 EN SEFI BEC

Incoming Connectable area Al/Cu 16-95 mm²

Incoming Main power switch A MCCB 125 A

Outgoing 2-pol/230V 16A Schuko Type F 1 pcs

Outgoing 5-pol/400V 32A CEE 432-6 6 pcs

RCD 0,03A 7 pcs

Weight 37 kg

Dimensions H x W x D (mm) 928 x 780 x 512 mm

Short-circuit strength lcf 17 kA

Protection class IP44