




* Now we provide a 5 year guarantee on the purchase of new El-Björn products. Go to our homepage to sign up.



Product arguments

- Condensing dehumidification is a energy-saving method to dehumidify as most energy is returned as heat
- The design is tried and tested and extremely reliable
- Easy to maintain
- Hot gas defrosting for high dehumidification capacity even at low temperature ranges
- Tubular evaporator
- As standard fitted with cable winder
- Suitable for areas up to 250m³
- The water is collected in the container with the level protection or is led away by a hose via the connection

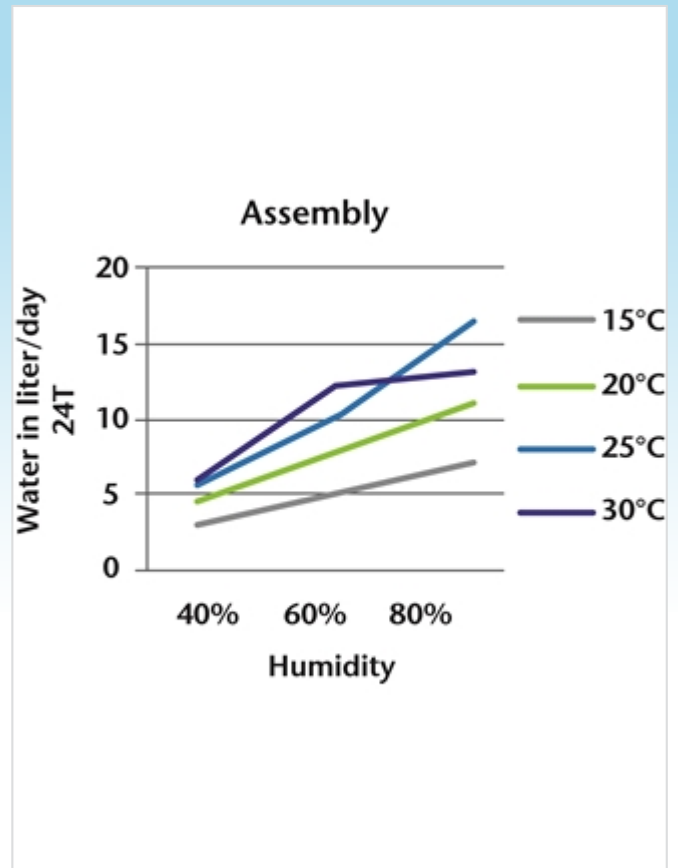

Article No.: E8745006

Type: A 60BT

Certifications:



Technical Data, A 60BT

Incoming Min fuse 10 A

Incoming Cable Length / Area Cable / Connector 2,0m / 3x1,5 / 1N-230V

Voltage 50Hz, 230 V

Output 640 W

Refrigerant Amount / Type 280g / R134a

Air flow 500 m³/h

Working range Humidity 20%-99% %RH

Capacity at 26 °C 70%RH 16 l/24h

Working range Temp. +8 - +35 °C

Weight 28 kg

Dimensions H x W x D (mm) 690x350x390 mm

Protection class IPX4