

**NEW**

# ROWELD ROFUSE Sani 160/315

Universal electrofusion welding unit for PE and PP drainage pipe with 230 V welding fittings up to Ø 315 mm



## **Safety**

Microprocessor controlled welding unit with automatic temperature and voltage compensation



## **Easy handling**

Icon-based ensure low intuitive and easy operation



## **Welding in confined spaces**

Angled plugs ensure low installation height

**NEW**

# ROWELD ROFUSE Sani 160/315

**RO  
CASE**

**Welding in confined spaces**

90° angled plugs ensure low installation height

**Impact-resistant housing (IP 54)**

Robust

**Large illuminated display**

Easy monitoring of the welding process

**Intuitive and easy operation**

Icon-based software control with automatic welding parameter detection

**3 m welding cable**

Large operating radius



90° angled plugs




Large illuminated display



Robust packaging in RO CASE

Technical data	
Input voltage	180 - 280 V (230 V)
Frequency	40 - 70 Hz
Output current	5A controlled
Protection class	IP 54
Working range	up to Ø160 / up to Ø315mm
Temperature range	-10 °C up to +40 °C
Weight	2.3 kg (Sani 160)
Dimension	110 x 200 x 80 mm
Welding cable	3 m

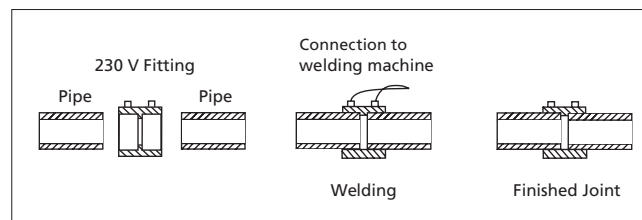

Description	kg	No.
ROWELD ROFUSE Sani 160	2.3	1000002630
ROWELD ROFUSE Sani 315	2.5	1000002631