

## Start Track Spot Integral

START Track Spot Integral 2700lm 930 MB WB BLK

0005425



### Product features

- Integrated LED spotlight, Textured Black - RAL9005, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lens 64° beam angle included, color temperature: 3000K, total system power: 32W, total fixture output: 2700 lm, LOR: 100%, colour rendering: Ra: 90 typical, LED Chromaticity: 3 step MacAdam ellipse, lifetime: >50000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø80x137x283, weight: 0.880kg.



## PRODUCT OVERVIEW

IPC Code	0005425
Product name	START Track Spot Integral 2700lm 930 MB WB BLK
Technology	LED (3 SDCM)
Housing	Aluminium
Mount	Track light
Environment	Indoor
General application	Retail
Certifications	EUNEW010
ETIM Class	EC001744
E-number FI	4276968
Fixture luminous flux (lm)	2700
Luminaire efficacy (lm/W)	85
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	32
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Average life (Nominal) (h)	50000
Housing colour	Black - RAL9005
IP rating	IP20
IK rating	IK03
Product EAN number	5410288054254
Lamps	No

## Start Track Spot Integral

*START Track Spot Integral 2700lm 930 MB WB BLK*  
0005425

### DATA TABLE

#### General data

IPC Code	0005425
Product name	START Track Spot Integral 2700lm 930 MB WB BLK
Technology	LED (3 SDCM)
Housing	Aluminium
Mount	Track light
Environment	Indoor
General application	Retail
Operating temperature range (°C)	-20 to +40
Certifications	EUNEW010
ETIM Class	EC001744
E-number FI	4276968

#### Optical data

Fixture luminous flux (lm)	2700
Luminaire efficacy (lm/W)	85
Colour temperature (K)	3000
Colour Code	930
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Beam Angle (°)	36
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	32
Current (A)	0.15
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	800
Inrush Current (A)	6.5
Inrush Duration (µs)	320
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	33
Max. Luminaires per 13A C Breaker	43
Max. Luminaires per 16A C Breaker	53
Max. Luminaires per 20A C Breaker	66

#### Lifetime data

Lumen maintenance - L70 B50	50000
Lumen maintenance - L80 B50	48100

## Start Track Spot Integral

START Track Spot Integral 2700lm 930 MB WB BLK  
0005425

Lumen maintenance - L80 B20	41000
Lumen maintenance - L80 B10	37700
Lumen maintenance - L90 B50	19500
Lumen maintenance - L90 B20	17000
Lumen maintenance - L90 B10	15900
Average life (Nominal) (h)	50000



### Physical data

Vertical Tilt (°)	90
Horizontal rotation (°)	345
Housing colour	Black - RAL9005
IP rating	IP20
IK rating	IK03
Diffuser finish	Clear
Diffuser material	PC
Nominal Product Length (mm)	283
Nominal Product Width (mm)	137
Nominal Product Height (mm)	80
Weight (kg)	0.88

### Packaging



Single packaging type	Carton
Product EAN number	5410288054254
Packaging single length / height (cm)	8.5
Packaging single width (cm)	8.5
Packaging single depth (cm)	28.5
DUN14 (outer)	15410288054251
Units per outer package	8
Packaging outer length / height (cm)	36.5
Packaging outer width (cm)	18.5
Packaging outer depth (cm)	30.5

## PHOTOMETRY

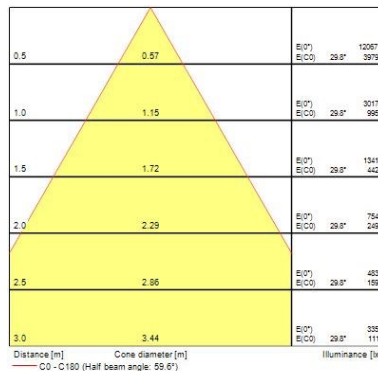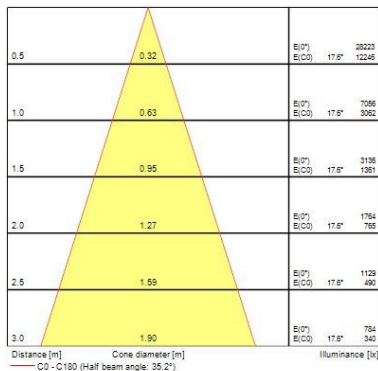


## Start Track Spot Integral

START Track Spot Integral 2700lm 930 MB WB BLK  
0005425

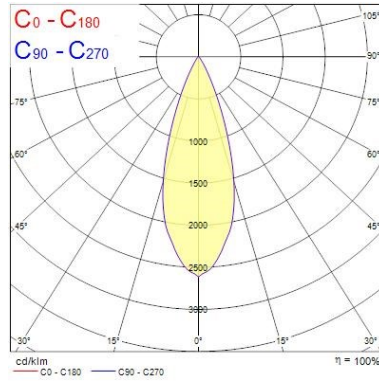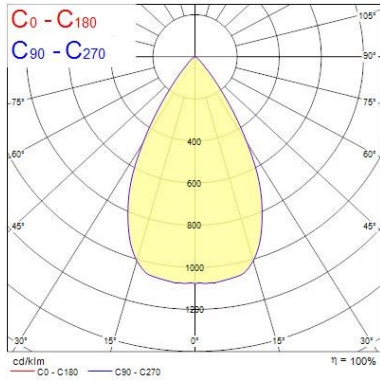


## TECHNICAL DRAWINGS

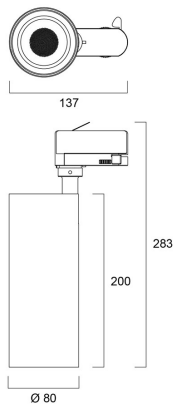


## Start Track Spot Integral


START Track Spot Integral 2700lm 930 MB WB BLK  
0005425


**SYLVANIA** 0005425


 This luminaire contains built in LED lamps.

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } LED

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0005425  874/2012