



CHINT NC1 Kontaktoru sērijas Datu lapa

Standarti un sertifikāti

IEC/EN 60947-4-1

Sertifikāti: CE, UL, CCC, EAC, TUV

Izmantošanas kategorijas

AC-1, AC-3, AC-4

Elektriskie parametri

Parametrs	Vērtība
Nominālā darba frekvence	50/60 Hz
Nominālais darba spriegums (Ue)	Līdz 690 V
Izolācijas spriegums (Ui)	690 V
Impulsu izturības spriegums (Uimp)	6 kV
Nominālā darba strāva (Ie)	AC-3 (400 V): 9–95 A (NC1-09 līdz NC1-95); AC-1 (400 V): līdz 200 A
Motora jaudas rādītāji (AC-3)	220/230 V: 2,2–30 kW; 380/400 V: 4–55 kW; 660/690 V: 5,5–75 kW
Palīgkontaktu strāvas rādītāji	AC-15: 380/400 V / 0,95 A; DC-13: 220 V / 0,15 A

Mehāniskie parametri

Mehāniskā izturība: 10 miljoni darbību

Elektriskā izturība (AC-3): 1 miljons darbību

Darbības cikli stundā

AC-3: 600

Šis tulkojums sniegts kā palīgmateriāls. Par oficiālu un precīzu informāciju jāuzskata tikai ražotāja oriģinālais dokuments.

AC-4: 150

Mehāniskie: 3 600

Spoles parametri

Vadības spoles sprieguma opcijas (AC): 24, 48, 110, 127, 220, 230, 380, 400 V

Vadības spoles sprieguma opcijas (DC): 24, 48, 110, 220 V

Spoles jaudas patēriņš: leslēgšanas brīdī: 70–200 VA; Darbības laikā: 7–25 VA

Temperatūras diapazons un uzstādīšanas prasības

Darbības temperatūra: –5 °C līdz +40 °C

Augstums: ≤ 2 000 m

Uzstādīšanas pozīcija: Vertikāli ar ±30° novirzi

Savienojumi

Galveno spaiļu kapacitāte: 1,5–50 mm²

Vadības spaiļu kapacitāte: 1–2,5 mm²

Pievelkšanas griezes moments (galvenie spaiļi): 1,2–3,5 N·m (atkarībā no modeļa)

Palīgkontakti

Konfigurācijas: 1NO + 1NC, 2NO + 2NC

Montāžas veids

DIN sliede vai skrūvju stiprinājums

Saderīgi piederumi

Palīgkontaktu bloki: LADN sērija

Laika aiztures bloki: LA2-DT sērija

Termiskie releji: NR2 sērija

Šis tulkojums sniegts kā palīgmateriāls. Par oficiālu un precīzu informāciju jāuzskata tikai ražotāja oriģinālais dokuments.

Tipiskas pielietošanas jomas

Motora palaidēji, vadības paneļi, apgaismojuma sistēmas, HVAC iekārtas

Aizsardzības pakāpe

IP20 (ar vāku)




NC1 Series AC Contactors

1. General

- 1.1 Certificates: CE, VDE, EK, EAC, UL;
- 1.2 Electric ratings: AC50Hz (or 50/60 Hz), 690V, up to 95A;
- 1.3 Application: remote making & breaking circuits;
protect circuit from over-load when assembling
with thermal over-load relay;
Frequent start-up and control of AC contactor;
- 1.4 Utilization category: AC-3, AC-4;
- 1.5 Altitude: ≤2000m;
- 1.6 Ambient temperature: -5°C ~+40°C ;
- 1.7 Mounting category: III
- 1.8 Mounting conditions:
inclination between the mounting plane
and the vertical plane should not exceed ±5°
- 1.9 Standard: IEC/EN 60947-4-1 2.0 IP10

2. Type designation

N C1- □ □ □ - □

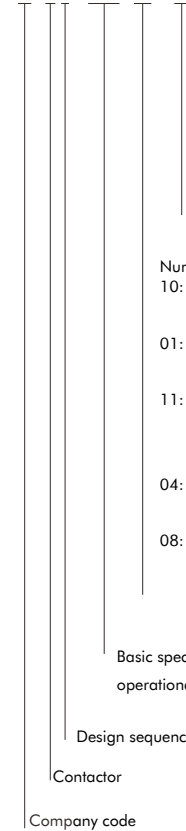

Z: DC coil
N:Reversing/change-over
type contactor (There is no such type as
NC1-**Z (DC coil) and
NC1-**08 (2N/O+2N/C)).

Number of contacts
10: 3 N/O main contacts+1 N/O auxiliary
contact (9A,12A,18A,25A,32A)
01: 3 N/O main contacts+1 N/C auxiliary
contact (9A,12A,18A,25A,32A)
11: 3 N/O main contacts+1 N/O
and 1N/C auxiliary contact
(40A,50A,65A,80A,95A)
04: 4 N/O main contacts
(9A,12A,25A,40A,50A,65A,80A,95A)
08: 2 N/O and 2N/C main contacts
(9A,12A,25A,40A,50A,65A,80A,95A)

Basic specification, expressed with the rated
operational current 400(380)V, AC-3

Design sequence No.

Contactors

Company code


The correction factors for different rated operation current under operation temperature higher than +40°C are given in the following table. The rated operation voltage remains unchanged.

Ambient temperature (°C)	40	50	60	70
Correction factor	1	0.875	0.75	0.625




3. Curves

Electric life curves (AC-3)

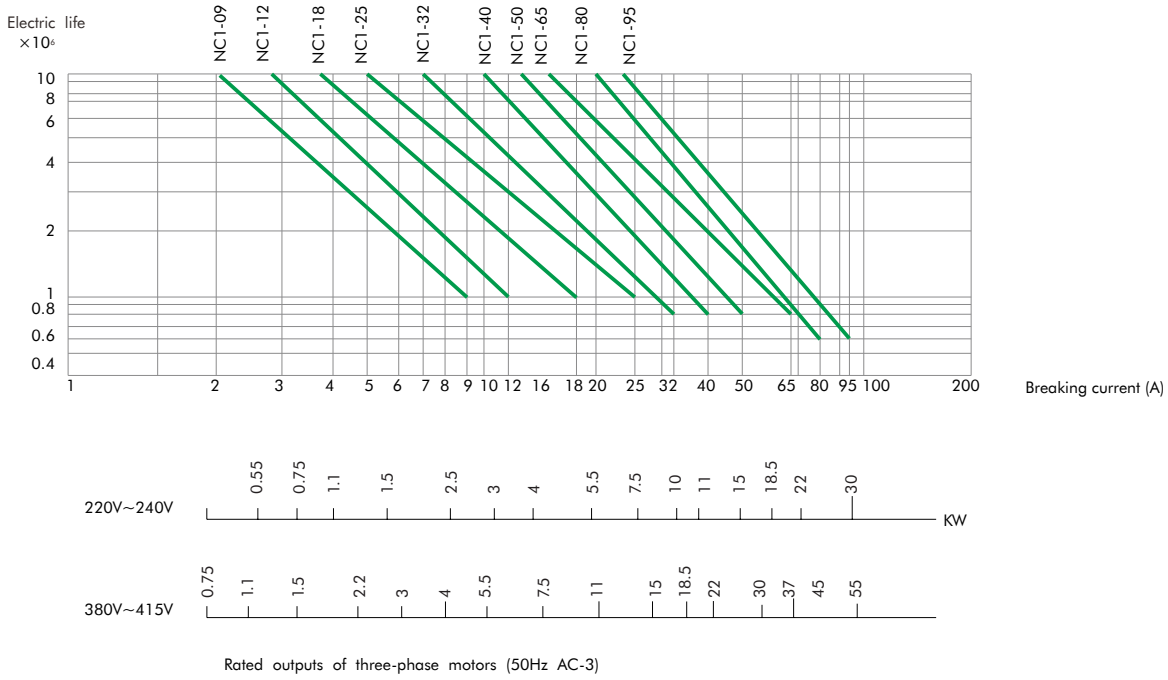

Electric life curves (AC-4)

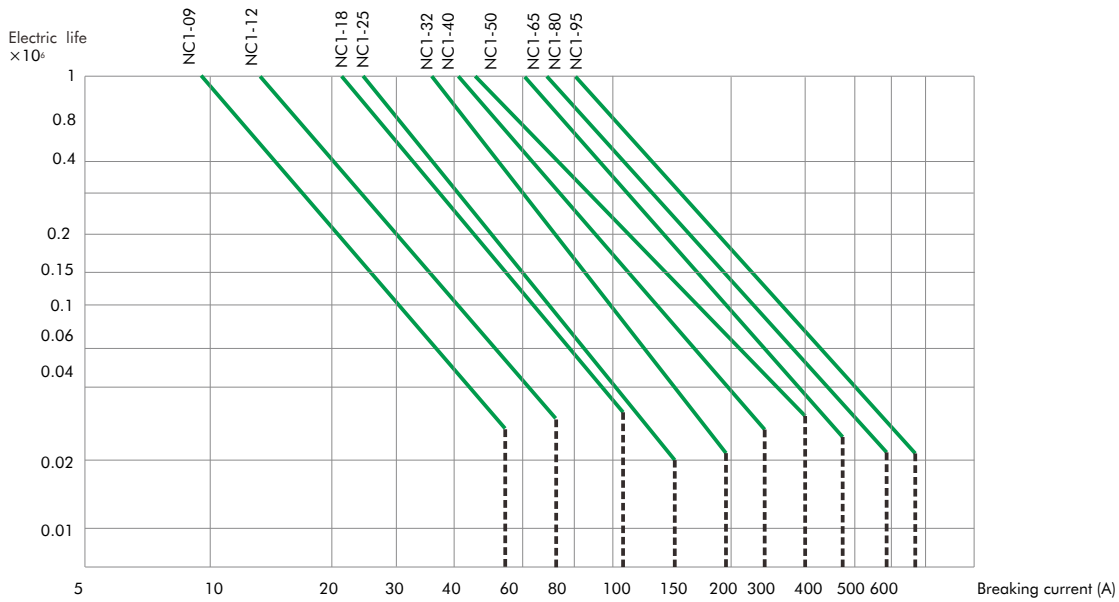




Example:
 Request to control the start of three-phase motors
 main technical parameter of three-phase motors: $P=5.5\text{kW}$, $U_e=400\text{V}(380\text{V})$, $I_e=11\text{A}$, $I_c=6 \times I_e=66\text{A}$
 The electric life span of request: 2,00,000 operations
 the contactor should be NC1-32 according to the curves above

4. Technical data

4.1 AC coil contactor

★ AC coil operation




Items	Mode		NC1-09N	NC1-12N	NC1-18N	NC1-25N
Frame			Frame 1(3P,4P)		Frame 2(3P)	Frame 3(3P,4P)
						
Rated conventional heating current(A)AC-1			25	25	32	45
Rated operational current(A)	400(380)V	AC-3	9	12	18	25
		AC-4	3.5	5	7.7	8.5
	690(660)V	AC-3	6.6	8.9	12	18
		AC-4	1.5	2	3.8	4.4
Rated insulation voltage(V AC)			690	690	690	690
Power of controlled 3-phase cage motor(AC-3)	kW	230(220)VAC	2.2	3	4	5.5
		400(380)VAC	4	5.5	7.5	11
		690(660)VAC	5.5	7.5	10	15
	hp	200VAC	3	5	7.5	7.5
		240VAC	3	5	7.5	10
		460VAC	5	7.5	10	15
Operating frequency (operations/h)	Electrical	AC-3	1,200	1,200	1,200	1,200
		AC-4	300	300	300	300
		Mechanical	3,600	3,600	3,600	3,600
Electrical life (×10 ³ operations)		AC-3	1,000	1,000	1,000	1,000
		AC-4	200	200	200	200
Mechanical life(×10 ⁶ operations)			10	10	10	10
Matched fuse type			gG-20	gG-20	gG-32	gG-40

★ AC coil operation, reversing type

Items	Mode		NC1-09N	NC1-12N	NC1-18N	NC1-25N
Frame			Frame 1(3P,4P)		Frame 2(3P)	Frame 3(3P,4P)
Rated conventional heating current(A)AC-1			25	25	32	45
AC-4	I _e (A)	380/400V	3.5	5	7.7	8.5
		660/690V	1.5	2	3.8	4.4
	P _e (kW)	380/400V	1.5	2.2	3	4
		660/690V	1.1	1.5	3.7	4
Power of controlled 3-phase cage motor(AC-3)	hp	200V	3	5	7.5	7.5
		240V	3	5	7.5	10
		460V	5	7.5	10	15
		600V	5	7.5	10	15

★ AC coil operation, change-over type

Items	Mode		NC1-09N	NC1-12N	NC1-25N
Frame			Frame 1(4P)	Frame 2(4P)	Frame 3(4P)
Rated conventional heating current(A)AC-1			25	25	45
AC-4	I _e (A)	380/400V	3.5	5	8.5
		660/690V	1.5	2	4.4
	P _e (kW)	380/400V	1.5	2.2	4
		660/690V	1.1	1.5	4
Power of controlled 3-phase cage motor(AC-3)	hp	200V	3	5	7.5
		240V	3	5	10
		460V	5	7.5	15
		600V	5	7.5	15




NC1-32N	NC1-40N	NC1-50N	NC1-65N	NC1-80N	NC1-95N
Frame 4(3P)	Frame 5(3P,4P)			Frame 6(3P,4P)	
					
50	60	80	80	110(Can be customized for 125)	110(Can be customized for 125)
32	40	50	65	80	95
12	18.5	24	28	37	44
21	34	39	42	49	49
7.5	9	12	14	17.3	21.3
690	690	690	690	690	690
7.5	11	15	18.5	22	25
15	18.5	22	30	37	45
18.5	30	37	37	45	45
10	15	15	20	25	30
15	20	20	25	30	30
20	25	30	40	40	50
20	25	30	40	40	50
600	600	600	600	600	600
300	300	300	300	300	300
3,600	3,600	3,600	3,600	3,600	3,600
800	800	600	600	600	600
200	150	150	150	100	100
8	8	8	8	6	6
gG-50	gG-63	gG-80	gG-80	gG-125	gG-125




NC1-32N	NC1-40N	NC1-50N	NC1-65N	NC1-80N	NC1-95N
Frame 4(3P)	Frame 5(3P,4P)			Frame 6(3P,4P)	
50	60	80	80	110(Can be customized for 125)	110(Can be customized for 125)
12	18.5	24	28	37	44
7.5	9	12	14	17.3	21.3
5.5	7.5	11	15	18.5	22
5.5	7.5	11	11	15	18.5
10	15	15	20	25	30
15	20	20	25	30	30
20	25	30	40	40	50
20	25	30	40	40	50

NC1-40N	NC1-50N	NC1-65N	NC1-80N	NC1-95N
Frame 4(4P)	Frame 5(4P)		Frame 6(4P)	
60	80	80	110(Can be customized for 125)	110(Can be customized for 125)
18.5	24	28	37	44
9	12	14	17.3	21.3
7.5	11	15	18.5	22
7.5	11	11	15	18.5
15	15	20	25	30
20	20	25	30	30
25	30	40	40	50
25	30	40	40	50

4.2 DC coil contactor

★ DC coil operation(24V,110V,220V)

Items		Mode	NC1-09Z	NC1-12Z	NC1-18Z	NC1-25Z
Frame			Frame 1(3P,4P)		Frame 2(3P)	Frame 3(3P,4P)
						
Rated conventional heating current(A)AC-1			25	25	32	45
Rated operational current(A)	400(380)V	AC-3	9	12	18	25
		AC-4	3.5	5	7.7	8.5
	690(660)V	AC-3	6.6	8.9	12	180
		AC-4	1.5	2	3.8	4.4
Conventional heating current(A)			25	25	7.7	8.5
Rated insulation voltage(V AC)			690	690	12	18
Power of controlled 3-phase cage motor(AC-3)	kW	230(220)VAC	2.2	3	3.8	4.4
		400(380)VAC	4	5.5	32	45
		690(660)VAC	5.5	7.5	690	690
Operating frequency (operations/h)	Electrical	AC-3	1,200	1,200	1,200	1,200
		AC-4	300	300	300	300
	Mechanical	3,600	3,600	3,600	3,600	
Electrical life ($\times 10^3$ operations)	AC-3	1,000	1,000	1,000	1,000	
	AC-4	200	200	200	200	
Mechanical life($\times 10^6$ operations)			10	10	10	10
Matched fuse type			gG-20	gG-20	gG-32	gG-40


NC1-32Z	NC1-40Z	NC1-50Z	NC1-65Z	NC1-80Z	NC1-95Z
Frame 4(3P)	Frame 5(3P,4P)			Frame 6(3P,4P)	
					
50	60	80	80	110(Can be customized for 125)	110(Can be customized for 125)
32	40	50	65	80	95
12	18.5	24	28	37	44
21	34	39	42	49	49
7.5	9	12	14	17.3	21.3
50	60	80	80	110(Can be customized for 125)	110(Can be customized for 125)
690	690	690	690	690	690
7.5	11	15	18.5	22	25
15	18.5	22	30	37	45
18.5	30	37	37	45	45
600	600	600	600	600	600
300	300	300	300	300	300
3,600	3,600	3,600	3,600	3,600	3,600
800	800	600	600	600	600
200	150	150	150	100	100
8	8	8	8	6	6
gG-50	gG-63	gG-80	gG-80	gG-125	gG-125

5. Accessories


5. Accessories

Items	Model	NC1-09	NC1-12	NC1-18	NC1-25	
AC coil	Coil power	In-rush(VA)	70	70	70	110
		Sealed(VA)	9	9	9.5	14
		Power(W)	1.8~2.7	1.8~2.7	3~4	3~4
	Operation range	Operation voltage	(85%~110%)US			
		Drop-out voltage	(20%~75%) Us			
	Coil voltage(50Hz,60Hz, 50/60Hz)(V)	24,36,48,110,127,220,230,240,380,415,440,480,500,600,660				
DC coil	Coil power(W)	9	9	11	11	
	Operation range	Pick-up voltage	(85%~110%) Us			
		Drop-out voltage	(10%~75%) Us			
	Coil voltage(V)	24,36,48,110,220				


F4 auxiliary contact





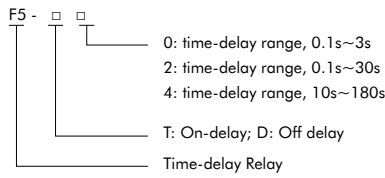

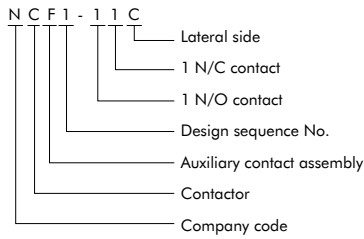

F5 Time-delay Relay



















NCF1-11C lateral side auxiliary contact



NC1-32	NC1-40	NC1-50	NC1-65	NC1-80	NC1-95
110	300	300	300	300	300
14	57	57	57	57	57
3~4	6~10	6~10	6~10	6~10	6~10
(85%~110%) Us					
(20%~75%) Us					
24,36,42,48,110,120,127,200,208,220,230,240,277,380,400,415,440,460,480,500,525,600,660					
11	22	22	22	22	22
(85%~110%) Us					
(10%~75%) Us					




Picture	Model	Configuration of contacts		
		Number of N/O contact	Number of N/C contact	
	F4-20	2	0	
	F4-11	1	1	
	F4-02	0	2	
	F4-40	4	0	
	F4-31	3	1	
	F4-22	2	2	
	F4-13	1	3	
	F4-04	0	4	
Picture	Model	Time-delay range	Number of time-delay contacts	
	F5-T0	0.1s~3s	N/O+N/C	
	F5-T2	0.1s~30s	N/O+N/C	
	F5-T4	10s~180s	N/O+N/C	
	F5-D0	0.1s ~ 3s	N/O+N/C	
	F5-D2	0.1s~30s	N/O+N/C	
	F5-D4	10s~180s	N/O+N/C	
	NCF1-11C	11		
	NC1-40Z-95Z(DC coil)cannot be installed with such accessory			
 SR2-A Surge suppressor	Suppression voltage range	AC 24V ~ 48V	SR2-A 24V ~ 48V	Able to be used for the products of 9A~38A or lower
		AC 100V~250V	SR2-A 100V~250V	
		AC 380V ~ 440V	SR2-A 380V ~ 440V	
 SR2-C Surge suppressor	Suppression voltage range	AC 24V~48V	SR2-C 24V ~ 48V	Able to be used for the products of 40A~95A or lower
		AC 100V~250V	SR2-C 100V ~ 250V	
		AC 380V ~ 440V	SR2-C 380V ~ 440V	

5.2 Derived products when the contactor is assembled with following accessory module



Derived products	Contactor	Accessorial modular	Picture
Time-delay contactor		+  Time-delay block	
Reversing contactor		+  Mechanical interlock	
Magnetic starter		+  Thermal relay	
AC contactor for capacitor switching		+  Current-limiting contact assembly	
Star-delta starter		+  Time-delay Relay +  Auxiliary contact assembly	

Note: NC1-09Z-95Z cannot form the reversing contactor.

5.3 Assembly with thermal over-load relay

Model of contactor	Assembled thermal over-load relay			
	Model	Rated current(A)	Recommended fuse type	
			aM	gG
NC1-09 NC1-12 NC1-18 NC1-25 NC1-32	 NR2-25	0.1~0.16	0.25	2
		0.16~0.25	0.5	2
		0.25~0.4	1	2
		0.4~0.63	1	2
		0.63~1	2	4
		1~1.6	2	4
		1.25~2	4	6
		1.6~2.5	4	6
		2.5~4	6	10
		4~6	8	16
		5.5 ~ 8	12	20
		7~10	12	20
		9~13	16	25
		12~18	20	35
17~25	25	50		
NC1-32	 NR2-36	23~32	40	63
		28~36	40	80
NC1-40 NC1-50 NC1-65 NC1-80 NC1-95	 NR2-93	23~32	40	63
		30~40	40	100
		37~50	63	100
		48~65	63	100
		55~70	80	125
		63~80	80	125
		80 ~ 93	100	160

5.4 Assembly with electronic overload relay

Model of contactor	Model	Rated	Range of setting	Recommended
		Assembled themal current(A)	Over-load rday current(A)	Fuse type
NC1-09		1.2	0.6~1.2	RT36-4(NT00-4)
		2.4	1.2~2.4	RT36-6(NT00-6)
		4	2~4	RT36-10(NT00-10)
		8	4~8	RT36-16(NT00-16)
		10	5~10	RT36-20(NT00-20)
NC1-12	NRE8-25	12	7~12	RT36-25(NT00-25)
NC1-18		20	10~20	RT36-40(NT00-40)
NC1-25		25	20~25	RT36-50(NT00-50)
NC1-32		32	22~32	RT36-80(NT00-80)
NC1-40			4	2~4
	8		4~8	RT36-16(NT00-16)
	10		5~10	RT36-20(NT00-20)
	20		10~20	RT36-40(NT00-40)
	40		20~40	RT36-80(NT00-80)
NC1-40	NRE8-100	65	30~65	RT36-160(NT00-160)
NC1-50				
NC1-65				
NC1-80				
NC1-95				



6. Technical information

6.1 Terminal connection



Model	Cabling cross section(Cu)					
	Number of piece	Flexible cable with cold-pressed socket(mm ²)	Flexible cable without cold-pressed socket(mm ²)	Inflexible cable (mm ²)	Screw size	Tightening torque(Nm)
NC1-09	1	1/2.5	1/4	1/4	M3.5	0.8
	2	1/2.5	1/2.5	1/4	M3.5	0.8
NC1-12	1	1/2.5	1/4	1/4	M3.5	0.8
	2	1/2.5	1/2.5	1/4	M3.5	0.8
NC1-18	1	1.5/4	1.5/6	1.5/6	M3.5	0.8
	2	1.5/4	1.5/4	1.5/6	M3.5	0.8
NC1-25	1	1.5/4	1.5/10	1.5/6	M4	1.2
	2	1.5/4	1.5/6	1.5/6	M4	1.2
NC1-32	1	2.5/6	2.5/10	2.5/10	M4	1.2
	2	2.5/6	2.5/6	2.5/10	M4	1.2
NC1-40	1	6/25	6/25	6/25	M8	6
	2	4/10	4/10	4/10	M8	6
NC1-50	1	6/25	6/25	6/25	M8	6
	2	4/10	4/10	4/10	M8	6
NC1-65	1	6/25	6/25	6/25	M8	6
	2	4/10	4/10	4/10	M8	6
NC1-80	1	10/35	10/35	10/35	M10	⌀ 6 Ⓞ 10
	2	6/16	6/16	6/16	M10	⌀ 6 Ⓞ 10
NC1-95	1	10/35(50)	10/35(50)	10/35(50)	M10	⌀ 6 Ⓞ 10
	2	6/16	6/16	6/16	M10	⌀ 6 Ⓞ 10

7. Overall and mounting dimensions (mm)



NC1-09~32

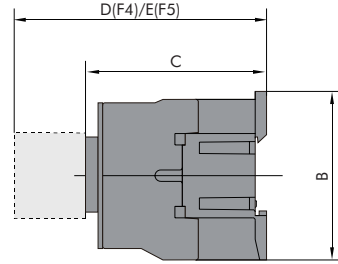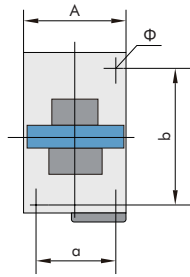



NC1-40~95

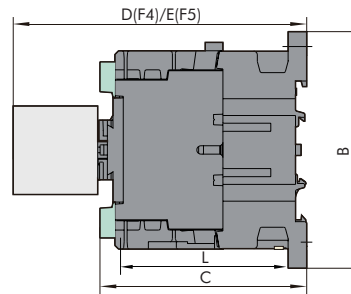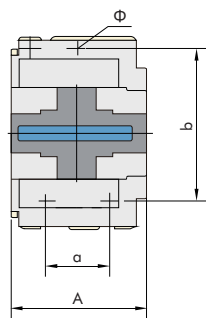


NC1-09Z~32Z

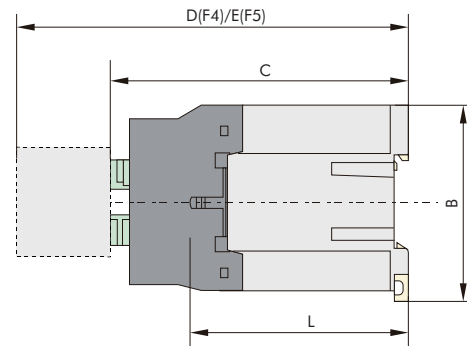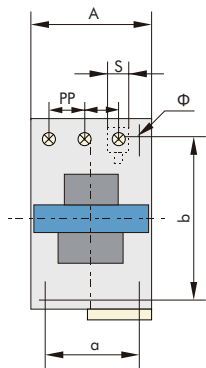


NC1-40Z~95Z

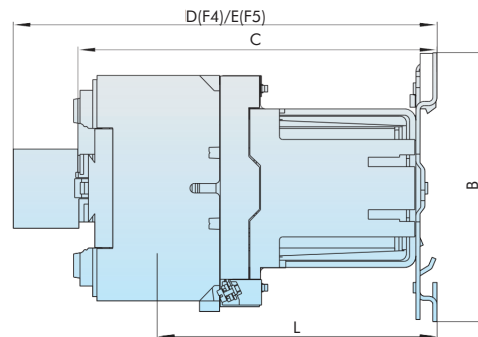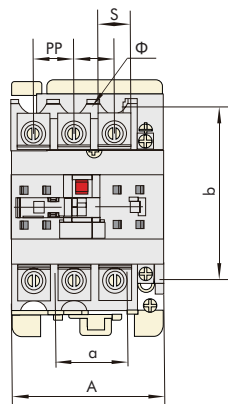

Model	A max	B max	C max	D max	E max	a	b	Φ	L	P	S
NC1-09(Z)~12(Z)	47	76	82(116)	115(149)	135.5(169.5)	34/35	50/60	4.5	60(95)	10.5	8.6
NC1-18(Z)	47	76	87(122)	120(155)	140(175.5)	34/35	50/60	4.5	61(96)	11.3	10.4
NC1-25(Z)	57	86	95(131)	128(164)	149.5(185.5)	40	48	4.5	70(107)	13.2	11.7
NC1-32(Z)	57	86	100(138)	133(171)	154.5(192.5)	40	48	4.5	78(135)	14.5	13
NC1-4011(Z)~6511(Z)	77	129	116(173)	146(203)	168(225)	40	105	6.5	78(135)	20	8.8
NC1-4004~6504	84	129	116(173)	146(203)	168(225)	40	105	6.5	78(135)	20	8.8
NC1-4008~6508	84	129	127(184)	146(203)	168(225)	40	105	6.5	78(135)	20	8.8
NC1-8011(Z)~9511(Z)	87	129	127(188)	155(212)	177(234)	40	105	6.5	83(140)	23.5	12
NC1-8004~9504	96	129	122(181)	155(212)	177(234)	40	105	6.5	83(140)	23.5	12
NC1-8008~9508	96	129	135(194)	155(212)	177(234)	40	105	6.5	83(140)	23.5	12

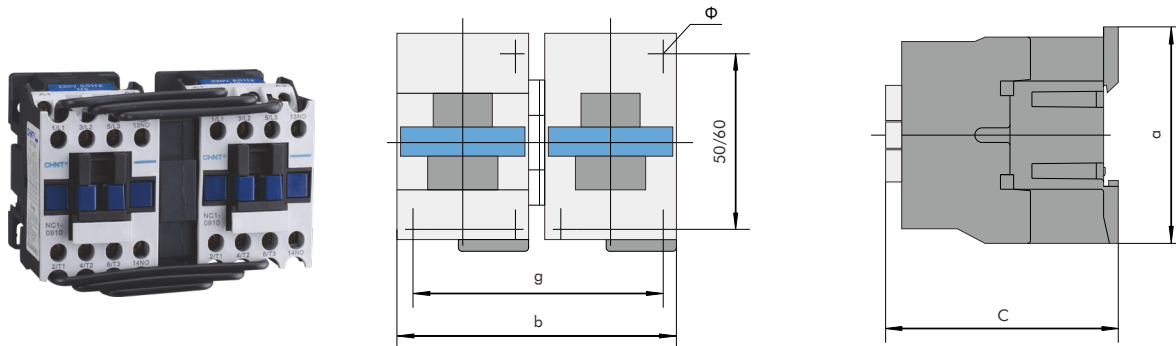


NC1-40~95N

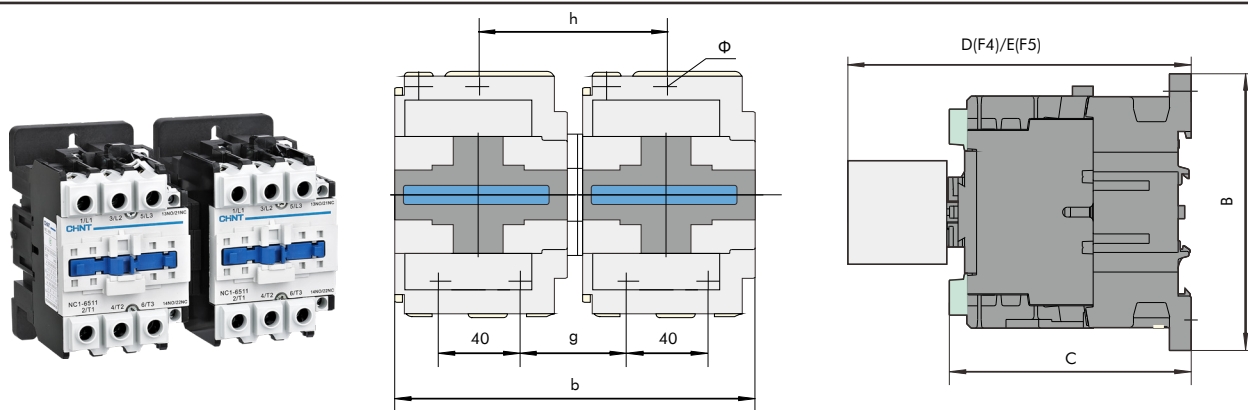

Contactormodel	a	b	c	g	h	Φ
NC1-09N~12N	86	109	82	95	-	4.5
NC1-18N	86	109	87	95	-	4.5
NC1-25N	93	131	95	111	-	4.5
NC1-32N	93	131	100	111	-	4.5
NC1-40N~65N(3P)	129	165	116	50	90	6.5
NC1-80N~95N(3P)	129	187	127	57	96	6.5
NC1-40N~65N(4P)	129	180	116	56	96	6.5
NC1-80N~95N(4P)	129	205	127	70	110	6.5

Note:
 1. L: in main circuit, the distance between terminals and plate; 2. P: in main circuit, the distance between two phases;
 3. S: in main circuit, the width of contacting plate.

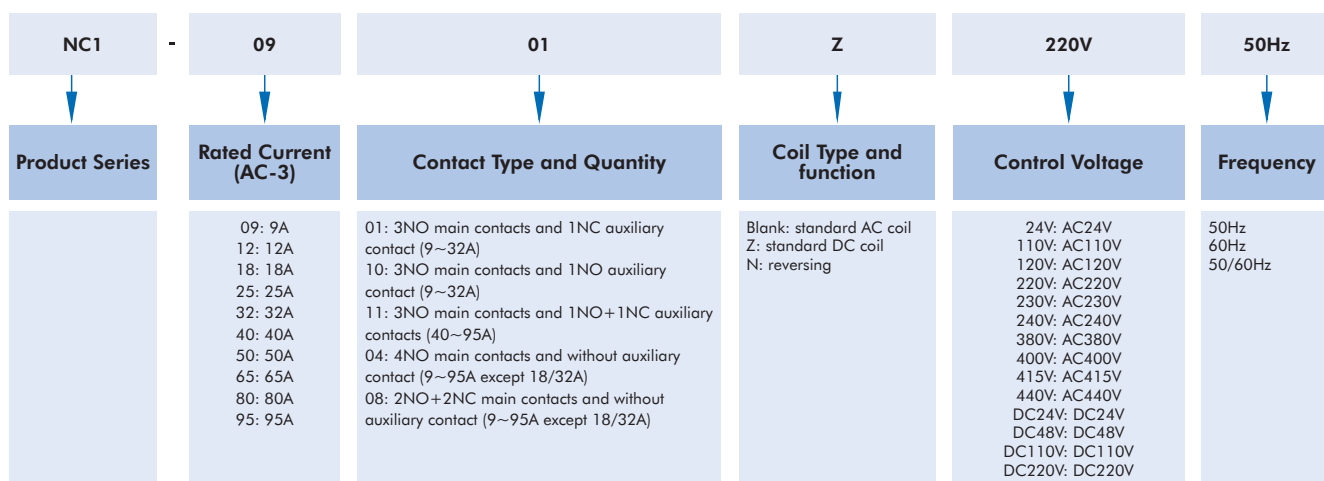

NC1 Contactor 9~95A

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NC	AC 110V 50/60Hz	NC1-0901 110V 50/60Hz	220787
9A	3NO	1NC	AC 110V 50Hz	NC1-0901 110V 50Hz	220788
9A	3NO	1NC	AC 110V 60Hz	NC1-0901 110V 60Hz	220789
9A	3NO	1NC	AC 120V 50/60Hz	NC1-0901 120V 50/60Hz	220790
9A	3NO	1NC	AC 120V 50Hz	NC1-0901 120V 50Hz	220791
9A	3NO	1NC	AC 120V 60Hz	NC1-0901 120V 60Hz	220792
9A	3NO	1NC	AC 220V 50/60Hz	NC1-0901 220V 50/60Hz	220796
9A	3NO	1NC	AC 220V 50Hz	NC1-0901 220V 50Hz	220797
9A	3NO	1NC	AC 220V 60Hz	NC1-0901 220V 60Hz	220798
9A	3NO	1NC	AC 230V 50/60Hz	NC1-0901 230V 50/60Hz	220799
9A	3NO	1NC	AC 230V 50Hz	NC1-0901 230V 50Hz	220800
9A	3NO	1NC	AC 230V 60Hz	NC1-0901 230V 60Hz	220801
9A	3NO	1NC	AC 240V 50/60Hz	NC1-0901 240V 50/60Hz	220802
9A	3NO	1NC	AC 240V 50Hz	NC1-0901 240V 50Hz	220803
9A	3NO	1NC	AC 240V 60Hz	NC1-0901 240V 60Hz	220804
9A	3NO	1NC	AC 24V 50/60Hz	NC1-0901 24V 50/60Hz	220805
9A	3NO	1NC	AC 24V 50Hz	NC1-0901 24V 50Hz	220806
9A	3NO	1NC	AC 24V 60Hz	NC1-0901 24V 60Hz	220807
9A	3NO	1NC	AC 380V 50/60Hz	NC1-0901 380V 50/60Hz	220812
9A	3NO	1NC	AC 380V 50Hz	NC1-0901 380V 50Hz	220813
9A	3NO	1NC	AC 380V 60Hz	NC1-0901 380V 60Hz	220814
9A	3NO	1NC	AC 400V 50/60Hz	NC1-0901 400V 50/60Hz	220815
9A	3NO	1NC	AC 400V 50Hz	NC1-0901 400V 50Hz	220816
9A	3NO	1NC	AC 400V 60Hz	NC1-0901 400V 60Hz	220817
9A	3NO	1NC	AC 415V 50/60Hz	NC1-0901 415V 50/60Hz	220818
9A	3NO	1NC	AC 415V 50Hz	NC1-0901 415V 50Hz	220819
9A	3NO	1NC	AC 415V 60Hz	NC1-0901 415V 60Hz	220820
9A	3NO	1NC	AC 440V 50/60Hz	NC1-0901 440V 50/60Hz	220824
9A	3NO	1NC	AC 440V 50Hz	NC1-0901 440V 50Hz	220825
9A	3NO	1NC	AC 440V 60Hz	NC1-0901 440V 60Hz	220826

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NC	AC 110V 50/60Hz	NC1-0901N 110V 50/60Hz	220834
9A	3NO	1NC	AC 110V 50Hz	NC1-0901N 110V 50Hz	220835
9A	3NO	1NC	AC 110V 60Hz	NC1-0901N 110V 60Hz	220836
9A	3NO	1NC	AC 220V 50/60Hz	NC1-0901N 220V 50/60Hz	220840
9A	3NO	1NC	AC 220V 50Hz	NC1-0901N 220V 50Hz	220841
9A	3NO	1NC	AC 220V 60Hz	NC1-0901N 220V 60Hz	220842
9A	3NO	1NC	AC 230V 50/60Hz	NC1-0901N 230V 50/60Hz	220843
9A	3NO	1NC	AC 230V 50Hz	NC1-0901N 230V 50Hz	220844
9A	3NO	1NC	AC 230V 60Hz	NC1-0901N 230V 60Hz	220845
9A	3NO	1NC	AC 240V 50/60Hz	NC1-0901N 240V 50/60Hz	220846
9A	3NO	1NC	AC 240V 50Hz	NC1-0901N 240V 50Hz	220847
9A	3NO	1NC	AC 240V 60Hz	NC1-0901N 240V 60Hz	220848
9A	3NO	1NC	AC 24V 50/60Hz	NC1-0901N 24V 50/60Hz	220849
9A	3NO	1NC	AC 24V 50Hz	NC1-0901N 24V 50Hz	220850
9A	3NO	1NC	AC 24V 60Hz	NC1-0901N 24V 60Hz	220851
9A	3NO	1NC	AC 380V 50/60Hz	NC1-0901N 380V 50/60Hz	220855
9A	3NO	1NC	AC 380V 50Hz	NC1-0901N 380V 50Hz	220856
9A	3NO	1NC	AC 380V 60Hz	NC1-0901N 380V 60Hz	220857
9A	3NO	1NC	AC 400V 50/60Hz	NC1-0901N 400V 50/60Hz	220858
9A	3NO	1NC	AC 400V 50Hz	NC1-0901N 400V 50Hz	220859
9A	3NO	1NC	AC 400V 60Hz	NC1-0901N 400V 60Hz	220860
9A	3NO	1NC	AC 415V 50/60Hz	NC1-0901N 415V 50/60Hz	220861
9A	3NO	1NC	AC 415V 50Hz	NC1-0901N 415V 50Hz	220862
9A	3NO	1NC	AC 415V 60Hz	NC1-0901N 415V 60Hz	220863
9A	3NO	1NC	AC 120V 50/60Hz	NC1-0901N 120V 50/60Hz	226025
9A	3NO	1NC	DC 110V	NC1-0901Z 110V	220879
9A	3NO	1NC	DC 220V	NC1-0901Z 220V	220880
9A	3NO	1NC	DC 24V	NC1-0901Z 24V	220881
9A	3NO	1NC	DC 48V	NC1-0901Z 48V	220882
9A	3NO	1NO	AC 110V 50/60Hz	NC1-0910 110V 50/60Hz	221020
9A	3NO	1NO	AC 110V 50Hz	NC1-0910 110V 50Hz	221021
9A	3NO	1NO	AC 110V 60Hz	NC1-0910 110V 60Hz	221022
9A	3NO	1NO	AC 120V 50/60Hz	NC1-0910 120V 50/60Hz	221023
9A	3NO	1NO	AC 120V 50Hz	NC1-0910 120V 50Hz	221024
9A	3NO	1NO	AC 120V 60Hz	NC1-0910 120V 60Hz	221025
9A	3NO	1NO	AC 220V 50/60Hz	NC1-0910 220V 50/60Hz	221029
9A	3NO	1NO	AC 220V 50Hz	NC1-0910 220V 50Hz	221030
9A	3NO	1NO	AC 220V 60Hz	NC1-0910 220V 60Hz	221031
9A	3NO	1NO	AC 230V 50/60Hz	NC1-0910 230V 50/60Hz	221032
9A	3NO	1NO	AC 230V 50Hz	NC1-0910 230V 50Hz	221033
9A	3NO	1NO	AC 230V 60Hz	NC1-0910 230V 60Hz	221034
9A	3NO	1NO	AC 240V 50/60Hz	NC1-0910 240V 50/60Hz	221035
9A	3NO	1NO	AC 240V 50Hz	NC1-0910 240V 50Hz	221036

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NO	AC 240V 60Hz	NC1-0910 240V 60Hz	221037
9A	3NO	1NO	AC 24V 50/60Hz	NC1-0910 24V 50/60Hz	221038
9A	3NO	1NO	AC 24V 50Hz	NC1-0910 24V 50Hz	221039
9A	3NO	1NO	AC 24V 60Hz	NC1-0910 24V 60Hz	221040
9A	3NO	1NO	AC 380V 50/60Hz	NC1-0910 380V 50/60Hz	221044
9A	3NO	1NO	AC 380V 50Hz	NC1-0910 380V 50Hz	221045
9A	3NO	1NO	AC 380V 60Hz	NC1-0910 380V 60Hz	221046
9A	3NO	1NO	AC 400V 50/60Hz	NC1-0910 400V 50/60Hz	221047
9A	3NO	1NO	AC 400V 50Hz	NC1-0910 400V 50Hz	221048
9A	3NO	1NO	AC 400V 60Hz	NC1-0910 400V 60Hz	221049
9A	3NO	1NO	AC 415V 50/60Hz	NC1-0910 415V 50/60Hz	221050
9A	3NO	1NO	AC 415V 50Hz	NC1-0910 415V 50Hz	221051
9A	3NO	1NO	AC 415V 60Hz	NC1-0910 415V 60Hz	221052
9A	3NO	1NO	AC 440V 50/60Hz	NC1-0910 440V 50/60Hz	221056
9A	3NO	1NO	AC 440V 50Hz	NC1-0910 440V 50Hz	221057
9A	3NO	1NO	AC 440V 60Hz	NC1-0910 440V 60Hz	221058
9A	3NO	1NO	AC 110V 50/60Hz	NC1-0910N 110V 50/60Hz	221065
9A	3NO	1NO	AC 110V 50Hz	NC1-0910N 110V 50Hz	221066
9A	3NO	1NO	AC 110V 60Hz	NC1-0910N 110V 60Hz	221067
9A	3NO	1NO	AC 220V 50/60Hz	NC1-0910N 220V 50/60Hz	221071
9A	3NO	1NO	AC 220V 50Hz	NC1-0910N 220V 50Hz	221072
9A	3NO	1NO	AC 220V 60Hz	NC1-0910N 220V 60Hz	221073
9A	3NO	1NO	AC 230V 50/60Hz	NC1-0910N 230V 50/60Hz	221074
9A	3NO	1NO	AC 230V 50Hz	NC1-0910N 230V 50Hz	221075
9A	3NO	1NO	AC 230V 60Hz	NC1-0910N 230V 60Hz	221076
9A	3NO	1NO	AC 240V 50/60Hz	NC1-0910N 240V 50/60Hz	221077
9A	3NO	1NO	AC 240V 50Hz	NC1-0910N 240V 50Hz	221078
9A	3NO	1NO	AC 240V 60Hz	NC1-0910N 240V 60Hz	221079
9A	3NO	1NO	AC 24V 50/60Hz	NC1-0910N 24V 50/60Hz	221080
9A	3NO	1NO	AC 24V 50Hz	NC1-0910N 24V 50Hz	221081
9A	3NO	1NO	AC 24V 60Hz	NC1-0910N 24V 60Hz	221082
9A	3NO	1NO	AC 380V 50/60Hz	NC1-0910N 380V 50/60Hz	221086
9A	3NO	1NO	AC 380V 50Hz	NC1-0910N 380V 50Hz	221087
9A	3NO	1NO	AC 380V 60Hz	NC1-0910N 380V 60Hz	221088
9A	3NO	1NO	AC 400V 50/60Hz	NC1-0910N 400V 50/60Hz	221089
9A	3NO	1NO	AC 400V 50Hz	NC1-0910N 400V 50Hz	221090
9A	3NO	1NO	AC 400V 60Hz	NC1-0910N 400V 60Hz	221091
9A	3NO	1NO	AC 415V 50/60Hz	NC1-0910N 415V 50/60Hz	221092
9A	3NO	1NO	AC 415V 50Hz	NC1-0910N 415V 50Hz	221093
9A	3NO	1NO	AC 415V 60Hz	NC1-0910N 415V 60Hz	221094
9A	3NO	1NO	AC 120V 60Hz	NC1-0910N 120V 60Hz	225828
9A	3NO	1NO	AC 120V 50/60Hz	NC1-0910N 120V 50/60Hz	226024

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	3NO	1NO	DC 110V	NC1-0910Z 110V	221110
9A	3NO	1NO	DC 220V	NC1-0910Z 220V	221111
9A	3NO	1NO	DC 24V	NC1-0910Z 24V	221112
9A	3NO	1NO	DC 48V	NC1-0910Z 48V	221113
9A	4NO	-	AC 110V 50/60Hz	NC1-0904 110V 50/60Hz	220884
9A	4NO	-	AC 110V 50Hz	NC1-0904 110V 50Hz	220885
9A	4NO	-	AC 110V 60Hz	NC1-0904 110V 60Hz	220886
9A	4NO	-	AC 220V 50/60Hz	NC1-0904 220V 50/60Hz	220890
9A	4NO	-	AC 220V 50Hz	NC1-0904 220V 50Hz	220891
9A	4NO	-	AC 220V 60Hz	NC1-0904 220V 60Hz	220892
9A	4NO	-	AC 230V 50/60Hz	NC1-0904 230V 50/60Hz	220893
9A	4NO	-	AC 230V 50Hz	NC1-0904 230V 50Hz	220894
9A	4NO	-	AC 230V 60Hz	NC1-0904 230V 60Hz	220895
9A	4NO	-	AC 240V 50/60Hz	NC1-0904 240V 50/60Hz	220896
9A	4NO	-	AC 240V 50Hz	NC1-0904 240V 50Hz	220897
9A	4NO	-	AC 240V 60Hz	NC1-0904 240V 60Hz	220898
9A	4NO	-	AC 24V 50/60Hz	NC1-0904 24V 50/60Hz	220899
9A	4NO	-	AC 24V 50Hz	NC1-0904 24V 50Hz	220900
9A	4NO	-	AC 24V 60Hz	NC1-0904 24V 60Hz	220901
9A	4NO	-	AC 380V 50/60Hz	NC1-0904 380V 50/60Hz	220905
9A	4NO	-	AC 380V 50Hz	NC1-0904 380V 50Hz	220906
9A	4NO	-	AC 380V 60Hz	NC1-0904 380V 60Hz	220907
9A	4NO	-	AC 400V 50/60Hz	NC1-0904 400V 50/60Hz	220908
9A	4NO	-	AC 400V 50Hz	NC1-0904 400V 50Hz	220909
9A	4NO	-	AC 400V 60Hz	NC1-0904 400V 60Hz	220910
9A	4NO	-	AC 415V 50/60Hz	NC1-0904 415V 50/60Hz	220911
9A	4NO	-	AC 415V 50Hz	NC1-0904 415V 50Hz	220912
9A	4NO	-	AC 415V 60Hz	NC1-0904 415V 60Hz	220913
9A	4NO	-	AC 440V 50/60Hz	NC1-0904 440V 50/60Hz	220917
9A	4NO	-	AC 440V 50Hz	NC1-0904 440V 50Hz	220918
9A	4NO	-	AC 440V 60Hz	NC1-0904 440V 60Hz	220919
9A	4NO	-	AC 120V 60Hz	NC1-0904 120V 60Hz	225548
9A	4NO	-	AC 120V 50/60Hz	NC1-0904 120V 50/60Hz	225811
9A	4NO	-	AC 110V 50/60Hz	NC1-0904N 110V 50/60Hz	220926
9A	4NO	-	AC 110V 50Hz	NC1-0904N 110V 50Hz	220927
9A	4NO	-	AC 110V 60Hz	NC1-0904N 110V 60Hz	220928
9A	4NO	-	AC 220V 50/60Hz	NC1-0904N 220V 50/60Hz	220932
9A	4NO	-	AC 220V 50Hz	NC1-0904N 220V 50Hz	220933
9A	4NO	-	AC 220V 60Hz	NC1-0904N 220V 60Hz	220934
9A	4NO	-	AC 230V 50/60Hz	NC1-0904N 230V 50/60Hz	220935
9A	4NO	-	AC 230V 50Hz	NC1-0904N 230V 50Hz	220936
9A	4NO	-	AC 230V 60Hz	NC1-0904N 230V 60Hz	220937
9A	4NO	-	AC 240V 50/60Hz	NC1-0904N 240V 50/60Hz	220938
9A	4NO	-	AC 240V 50Hz	NC1-0904N 240V 50Hz	220939
9A	4NO	-	AC 240V 60Hz	NC1-0904N 240V 60Hz	220940
9A	4NO	-	AC 24V 50/60Hz	NC1-0904N 24V 50/60Hz	220941

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
9A	4NO	-	AC 24V 50Hz	NC1-0904N 24V 50Hz	220942
9A	4NO	-	AC 24V 60Hz	NC1-0904N 24V 60Hz	220943
9A	4NO	-	AC 380V 50/60Hz	NC1-0904N 380V 50/60Hz	220947
9A	4NO	-	AC 380V 50Hz	NC1-0904N 380V 50Hz	220948
9A	4NO	-	AC 380V 60Hz	NC1-0904N 380V 60Hz	220949
9A	4NO	-	AC 400V 50/60Hz	NC1-0904N 400V 50/60Hz	220950
9A	4NO	-	AC 400V 50Hz	NC1-0904N 400V 50Hz	220951
9A	4NO	-	AC 400V 60Hz	NC1-0904N 400V 60Hz	220952
9A	4NO	-	AC 415V 50/60Hz	NC1-0904N 415V 50/60Hz	220953
9A	4NO	-	AC 415V 50Hz	NC1-0904N 415V 50Hz	220954
9A	4NO	-	AC 415V 60Hz	NC1-0904N 415V 60Hz	220955
9A	4NO	-	DC 110V	NC1-0904Z 110V	220968
9A	4NO	-	DC 220V	NC1-0904Z 220V	220969
9A	4NO	-	DC 24V	NC1-0904Z 24V	220970
9A	4NO	-	DC 48V	NC1-0904Z 48V	220971
9A	2NO+2NC	-	AC 110V 50/60Hz	NC1-0908 110V 50/60Hz	220973
9A	2NO+2NC	-	AC 110V 50Hz	NC1-0908 110V 50Hz	220974
9A	2NO+2NC	-	AC 110V 60Hz	NC1-0908 110V 60Hz	220975
9A	2NO+2NC	-	AC 220V 50/60Hz	NC1-0908 220V 50/60Hz	220979
9A	2NO+2NC	-	AC 220V 50Hz	NC1-0908 220V 50Hz	220980
9A	2NO+2NC	-	AC 220V 60Hz	NC1-0908 220V 60Hz	220981
9A	2NO+2NC	-	AC 230V 50/60Hz	NC1-0908 230V 50/60Hz	220982
9A	2NO+2NC	-	AC 230V 50Hz	NC1-0908 230V 50Hz	220983
9A	2NO+2NC	-	AC 230V 60Hz	NC1-0908 230V 60Hz	220984
9A	2NO+2NC	-	AC 240V 50/60Hz	NC1-0908 240V 50/60Hz	220985
9A	2NO+2NC	-	AC 240V 50Hz	NC1-0908 240V 50Hz	220986
9A	2NO+2NC	-	AC 240V 60Hz	NC1-0908 240V 60Hz	220987
9A	2NO+2NC	-	AC 24V 50/60Hz	NC1-0908 24V 50/60Hz	220988
9A	2NO+2NC	-	AC 24V 50Hz	NC1-0908 24V 50Hz	220989
9A	2NO+2NC	-	AC 24V 60Hz	NC1-0908 24V 60Hz	220990
9A	2NO+2NC	-	AC 380V 50/60Hz	NC1-0908 380V 50/60Hz	220994
9A	2NO+2NC	-	AC 380V 50Hz	NC1-0908 380V 50Hz	220995
9A	2NO+2NC	-	AC 380V 60Hz	NC1-0908 380V 60Hz	220996
9A	2NO+2NC	-	AC 400V 50/60Hz	NC1-0908 400V 50/60Hz	220997
9A	2NO+2NC	-	AC 400V 50Hz	NC1-0908 400V 50Hz	220998
9A	2NO+2NC	-	AC 400V 60Hz	NC1-0908 400V 60Hz	220999
9A	2NO+2NC	-	AC 415V 50/60Hz	NC1-0908 415V 50/60Hz	221000
9A	2NO+2NC	-	AC 415V 50Hz	NC1-0908 415V 50Hz	221001
9A	2NO+2NC	-	AC 415V 60Hz	NC1-0908 415V 60Hz	221002
9A	2NO+2NC	-	AC 440V 50/60Hz	NC1-0908 440V 50/60Hz	221006
9A	2NO+2NC	-	AC 440V 50Hz	NC1-0908 440V 50Hz	221007
9A	2NO+2NC	-	AC 440V 60Hz	NC1-0908 440V 60Hz	221008
9A	2NO+2NC	-	AC 120V 50/60Hz	NC1-0908 120V 50/60Hz	226579
9A	2NO+2NC	-	DC 110V	NC1-0908Z 110V	221015
9A	2NO+2NC	-	DC 220V	NC1-0908Z 220V	221016
9A	2NO+2NC	-	DC 24V	NC1-0908Z 24V	221017
9A	2NO+2NC	-	DC 48V	NC1-0908Z 48V	221018

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NC	AC 110V 50/60Hz	NC1-1201 110V 50/60Hz	221115
12A	3NO	1NC	AC 110V 50Hz	NC1-1201 110V 50Hz	221116
12A	3NO	1NC	AC 110V 60Hz	NC1-1201 110V 60Hz	221117
12A	3NO	1NC	AC 120V 50/60Hz	NC1-1201 120V 50/60Hz	221118
12A	3NO	1NC	AC 120V 50Hz	NC1-1201 120V 50Hz	221119
12A	3NO	1NC	AC 120V 60Hz	NC1-1201 120V 60Hz	221120
12A	3NO	1NC	AC 220V 50/60Hz	NC1-1201 220V 50/60Hz	221124
12A	3NO	1NC	AC 220V 50Hz	NC1-1201 220V 50Hz	221125
12A	3NO	1NC	AC 220V 60Hz	NC1-1201 220V 60Hz	221126
12A	3NO	1NC	AC 230V 50/60Hz	NC1-1201 230V 50/60Hz	221127
12A	3NO	1NC	AC 230V 50Hz	NC1-1201 230V 50Hz	221128
12A	3NO	1NC	AC 230V 60Hz	NC1-1201 230V 60Hz	221129
12A	3NO	1NC	AC 240V 50/60Hz	NC1-1201 240V 50/60Hz	221130
12A	3NO	1NC	AC 240V 50Hz	NC1-1201 240V 50Hz	221131
12A	3NO	1NC	AC 240V 60Hz	NC1-1201 240V 60Hz	221132
12A	3NO	1NC	AC 24V 50/60Hz	NC1-1201 24V 50/60Hz	221133
12A	3NO	1NC	AC 24V 50Hz	NC1-1201 24V 50Hz	221134
12A	3NO	1NC	AC 24V 60Hz	NC1-1201 24V 60Hz	221135
12A	3NO	1NC	AC 380V 50/60Hz	NC1-1201 380V 50/60Hz	221139
12A	3NO	1NC	AC 380V 50Hz	NC1-1201 380V 50Hz	221140
12A	3NO	1NC	AC 380V 60Hz	NC1-1201 380V 60Hz	221141
12A	3NO	1NC	AC 400V 50/60Hz	NC1-1201 400V 50/60Hz	221142
12A	3NO	1NC	AC 400V 50Hz	NC1-1201 400V 50Hz	221143
12A	3NO	1NC	AC 400V 60Hz	NC1-1201 400V 60Hz	221144
12A	3NO	1NC	AC 415V 50/60Hz	NC1-1201 415V 50/60Hz	221145
12A	3NO	1NC	AC 415V 50Hz	NC1-1201 415V 50Hz	221146
12A	3NO	1NC	AC 415V 60Hz	NC1-1201 415V 60Hz	221147
12A	3NO	1NC	AC 440V 50/60Hz	NC1-1201 440V 50/60Hz	221151
12A	3NO	1NC	AC 440V 50Hz	NC1-1201 440V 50Hz	221152
12A	3NO	1NC	AC 440V 60Hz	NC1-1201 440V 60Hz	221153
12A	3NO	1NC	AC 110V 50/60Hz	NC1-1201N 110V 50/60Hz	221160
12A	3NO	1NC	AC 110V 50Hz	NC1-1201N 110V 50Hz	221161
12A	3NO	1NC	AC 110V 60Hz	NC1-1201N 110V 60Hz	221162
12A	3NO	1NC	AC 220V 50/60Hz	NC1-1201N 220V 50/60Hz	221166
12A	3NO	1NC	AC 220V 50Hz	NC1-1201N 220V 50Hz	221167
12A	3NO	1NC	AC 220V 60Hz	NC1-1201N 220V 60Hz	221168
12A	3NO	1NC	AC 230V 50/60Hz	NC1-1201N 230V 50/60Hz	221169
12A	3NO	1NC	AC 230V 50Hz	NC1-1201N 230V 50Hz	221170
12A	3NO	1NC	AC 230V 60Hz	NC1-1201N 230V 60Hz	221171
12A	3NO	1NC	AC 240V 50/60Hz	NC1-1201N 240V 50/60Hz	221172
12A	3NO	1NC	AC 240V 50Hz	NC1-1201N 240V 50Hz	221173
12A	3NO	1NC	AC 240V 60Hz	NC1-1201N 240V 60Hz	221174
12A	3NO	1NC	AC 24V 50/60Hz	NC1-1201N 24V 50/60Hz	221175
12A	3NO	1NC	AC 24V 50Hz	NC1-1201N 24V 50Hz	221176
12A	3NO	1NC	AC 24V 60Hz	NC1-1201N 24V 60Hz	221177
12A	3NO	1NC	AC 380V 50/60Hz	NC1-1201N 380V 50/60Hz	221181

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NC	AC 380V 50Hz	NC1-1201N 380V 50Hz	221182
12A	3NO	1NC	AC 380V 60Hz	NC1-1201N 380V 60Hz	221183
12A	3NO	1NC	AC 400V 50/60Hz	NC1-1201N 400V 50/60Hz	221184
12A	3NO	1NC	AC 400V 50Hz	NC1-1201N 400V 50Hz	221185
12A	3NO	1NC	AC 400V 60Hz	NC1-1201N 400V 60Hz	221186
12A	3NO	1NC	AC 415V 50/60Hz	NC1-1201N 415V 50/60Hz	221187
12A	3NO	1NC	AC 415V 50Hz	NC1-1201N 415V 50Hz	221188
12A	3NO	1NC	AC 415V 60Hz	NC1-1201N 415V 60Hz	221189
12A	3NO	1NC	AC 24V 50/60Hz	NC1-1201N 24V 50/60Hz	223588
12A	3NO	1NC	AC 120V 50/60Hz	NC1-1201N 120V 50/60Hz	226034
12A	3NO	1NC	DC 110V	NC1-1201Z 110V	221205
12A	3NO	1NC	DC 220V	NC1-1201Z 220V	221206
12A	3NO	1NC	DC 24V	NC1-1201Z 24V	221207
12A	3NO	1NC	DC 48V	NC1-1201Z 48V	221208
12A	3NO	1NO	AC 110V 50/60Hz	NC1-1210 110V 50/60Hz	221346
12A	3NO	1NO	AC 110V 50Hz	NC1-1210 110V 50Hz	221347
12A	3NO	1NO	AC 110V 60Hz	NC1-1210 110V 60Hz	221348
12A	3NO	1NO	AC 120V 50/60Hz	NC1-1210 120V 50/60Hz	221349
12A	3NO	1NO	AC 120V 50Hz	NC1-1210 120V 50Hz	221350
12A	3NO	1NO	AC 120V 60Hz	NC1-1210 120V 60Hz	221351
12A	3NO	1NO	AC 220V 50/60Hz	NC1-1210 220V 50/60Hz	221355
12A	3NO	1NO	AC 220V 50Hz	NC1-1210 220V 50Hz	221356
12A	3NO	1NO	AC 220V 60Hz	NC1-1210 220V 60Hz	221357
12A	3NO	1NO	AC 230V 50Hz	NC1-1210 230V 50Hz	221358
12A	3NO	1NO	AC 230V 60Hz	NC1-1210 230V 60Hz	221359
12A	3NO	1NO	AC 240V 50/60Hz	NC1-1210 240V 50/60Hz	221360
12A	3NO	1NO	AC 240V 50Hz	NC1-1210 240V 50Hz	221361
12A	3NO	1NO	AC 240V 60Hz	NC1-1210 240V 60Hz	221362
12A	3NO	1NO	AC 24V 50/60Hz	NC1-1210 24V 50/60Hz	221363
12A	3NO	1NO	AC 24V 50Hz	NC1-1210 24V 50Hz	221364
12A	3NO	1NO	AC 24V 60Hz	NC1-1210 24V 60Hz	221365
12A	3NO	1NO	AC 380V 50/60Hz	NC1-1210 380V 50/60Hz	221369
12A	3NO	1NO	AC 380V 50Hz	NC1-1210 380V 50Hz	221370
12A	3NO	1NO	AC 380V 60Hz	NC1-1210 380V 60Hz	221371
12A	3NO	1NO	AC 400V 50/60Hz	NC1-1210 400V 50/60Hz	221372
12A	3NO	1NO	AC 400V 50Hz	NC1-1210 400V 50Hz	221373
12A	3NO	1NO	AC 400V 60Hz	NC1-1210 400V 60Hz	221374
12A	3NO	1NO	AC 415V 50/60Hz	NC1-1210 415V 50/60Hz	221375
12A	3NO	1NO	AC 415V 50Hz	NC1-1210 415V 50Hz	221376
12A	3NO	1NO	AC 415V 60Hz	NC1-1210 415V 60Hz	221377
12A	3NO	1NO	AC 440V 50/60Hz	NC1-1210 440V 50/60Hz	221381
12A	3NO	1NO	AC 440V 50Hz	NC1-1210 440V 50Hz	221382
12A	3NO	1NO	AC 440V 60Hz	NC1-1210 440V 60Hz	221383
12A	3NO	1NO	AC 230V 50/60Hz	NC1-1210 230V 50/60Hz	225513
12A	3NO	1NO	AC 110V 50/60Hz	NC1-1210N 110V 50/60Hz	221390
12A	3NO	1NO	AC 110V 50Hz	NC1-1210N 110V 50Hz	221391

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	3NO	1NO	AC 110V 60Hz	NC1-1210N 110V 60Hz	221392
12A	3NO	1NO	AC 220V 50/60Hz	NC1-1210N 220V 50/60Hz	221396
12A	3NO	1NO	AC 220V 50Hz	NC1-1210N 220V 50Hz	221397
12A	3NO	1NO	AC 220V 60Hz	NC1-1210N 220V 60Hz	221398
12A	3NO	1NO	AC 230V 50/60Hz	NC1-1210N 230V 50/60Hz	221399
12A	3NO	1NO	AC 230V 50Hz	NC1-1210N 230V 50Hz	221400
12A	3NO	1NO	AC 230V 60Hz	NC1-1210N 230V 60Hz	221401
12A	3NO	1NO	AC 240V 50/60Hz	NC1-1210N 240V 50/60Hz	221402
12A	3NO	1NO	AC 240V 50Hz	NC1-1210N 240V 50Hz	221403
12A	3NO	1NO	AC 240V 60Hz	NC1-1210N 240V 60Hz	221404
12A	3NO	1NO	AC 24V 50/60Hz	NC1-1210N 24V 50/60Hz	221405
12A	3NO	1NO	AC 24V 50Hz	NC1-1210N 24V 50Hz	221406
12A	3NO	1NO	AC 24V 60Hz	NC1-1210N 24V 60Hz	221407
12A	3NO	1NO	AC 380V 50/60Hz	NC1-1210N 380V 50/60Hz	221411
12A	3NO	1NO	AC 380V 50Hz	NC1-1210N 380V 50Hz	221412
12A	3NO	1NO	AC 380V 60Hz	NC1-1210N 380V 60Hz	221413
12A	3NO	1NO	AC 400V 50/60Hz	NC1-1210N 400V 50/60Hz	221414
12A	3NO	1NO	AC 400V 50Hz	NC1-1210N 400V 50Hz	221415
12A	3NO	1NO	AC 400V 60Hz	NC1-1210N 400V 60Hz	221416
12A	3NO	1NO	AC 415V 50/60Hz	NC1-1210N 415V 50/60Hz	221417
12A	3NO	1NO	AC 415V 50Hz	NC1-1210N 415V 50Hz	221418
12A	3NO	1NO	AC 415V 60Hz	NC1-1210N 415V 60Hz	221419
12A	3NO	1NO	AC 120V 60Hz	NC1-1210N 120V 60Hz	225555
12A	3NO	1NO	AC 120V 50/60Hz	NC1-1210N 120V 50/60Hz	226026
12A	3NO	1NO	DC 110V	NC1-1210Z 110V	221435
12A	3NO	1NO	DC 220V	NC1-1210Z 220V	221436
12A	3NO	1NO	DC 24V	NC1-1210Z 24V	221437
12A	3NO	1NO	DC 48V	NC1-1210Z 48V	221438
12A	4NO	-	AC 110V 50/60Hz	NC1-1204 110V 50/60Hz	221210
12A	4NO	-	AC 110V 50Hz	NC1-1204 110V 50Hz	221211
12A	4NO	-	AC 110V 60Hz	NC1-1204 110V 60Hz	221212
12A	4NO	-	AC 220V 50/60Hz	NC1-1204 220V 50/60Hz	221216
12A	4NO	-	AC 220V 50Hz	NC1-1204 220V 50Hz	221217
12A	4NO	-	AC 220V 60Hz	NC1-1204 220V 60Hz	221218
12A	4NO	-	AC 230V 50/60Hz	NC1-1204 230V 50/60Hz	221219
12A	4NO	-	AC 230V 50Hz	NC1-1204 230V 50Hz	221220
12A	4NO	-	AC 230V 60Hz	NC1-1204 230V 60Hz	221221
12A	4NO	-	AC 240V 50/60Hz	NC1-1204 240V 50/60Hz	221222
12A	4NO	-	AC 240V 50Hz	NC1-1204 240V 50Hz	221223
12A	4NO	-	AC 240V 60Hz	NC1-1204 240V 60Hz	221224
12A	4NO	-	AC 24V 50/60Hz	NC1-1204 24V 50/60Hz	221225
12A	4NO	-	AC 24V 50Hz	NC1-1204 24V 50Hz	221226
12A	4NO	-	AC 24V 60Hz	NC1-1204 24V 60Hz	221227
12A	4NO	-	AC 380V 50/60Hz	NC1-1204 380V 50/60Hz	221231
12A	4NO	-	AC 380V 50Hz	NC1-1204 380V 50Hz	221232
12A	4NO	-	AC 380V 60Hz	NC1-1204 380V 60Hz	221233

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	4NO	-	AC 400V 50/60Hz	NC1-1204 400V 50/60Hz	221234
12A	4NO	-	AC 400V 50Hz	NC1-1204 400V 50Hz	221235
12A	4NO	-	AC 400V 60Hz	NC1-1204 400V 60Hz	221236
12A	4NO	-	AC 415V 50/60Hz	NC1-1204 415V 50/60Hz	221237
12A	4NO	-	AC 415V 50Hz	NC1-1204 415V 50Hz	221238
12A	4NO	-	AC 415V 60Hz	NC1-1204 415V 60Hz	221239
12A	4NO	-	AC 440V 50/60Hz	NC1-1204 440V 50/60Hz	221243
12A	4NO	-	AC 440V 50Hz	NC1-1204 440V 50Hz	221244
12A	4NO	-	AC 440V 60Hz	NC1-1204 440V 60Hz	221245
12A	4NO	-	AC 120V 60Hz	NC1-1204 120V 60Hz	225549
12A	4NO	-	AC 120V 50/60Hz	NC1-1204 120V 50/60Hz	225833
12A	4NO	-	AC 110V 50/60Hz	NC1-1204N 110V 50/60Hz	221252
12A	4NO	-	AC 110V 50Hz	NC1-1204N 110V 50Hz	221253
12A	4NO	-	AC 110V 60Hz	NC1-1204N 110V 60Hz	221254
12A	4NO	-	AC 220V 50/60Hz	NC1-1204N 220V 50/60Hz	221258
12A	4NO	-	AC 220V 50Hz	NC1-1204N 220V 50Hz	221259
12A	4NO	-	AC 220V 60Hz	NC1-1204N 220V 60Hz	221260
12A	4NO	-	AC 230V 50/60Hz	NC1-1204N 230V 50/60Hz	221261
12A	4NO	-	AC 230V 50Hz	NC1-1204N 230V 50Hz	221262
12A	4NO	-	AC 230V 60Hz	NC1-1204N 230V 60Hz	221263
12A	4NO	-	AC 240V 50/60Hz	NC1-1204N 240V 50/60Hz	221264
12A	4NO	-	AC 240V 50Hz	NC1-1204N 240V 50Hz	221265
12A	4NO	-	AC 240V 60Hz	NC1-1204N 240V 60Hz	221266
12A	4NO	-	AC 24V 50/60Hz	NC1-1204N 24V 50/60Hz	221267
12A	4NO	-	AC 24V 50Hz	NC1-1204N 24V 50Hz	221268
12A	4NO	-	AC 24V 60Hz	NC1-1204N 24V 60Hz	221269
12A	4NO	-	AC 380V 50/60Hz	NC1-1204N 380V 50/60Hz	221273
12A	4NO	-	AC 380V 50Hz	NC1-1204N 380V 50Hz	221274
12A	4NO	-	AC 380V 60Hz	NC1-1204N 380V 60Hz	221275
12A	4NO	-	AC 400V 50/60Hz	NC1-1204N 400V 50/60Hz	221276
12A	4NO	-	AC 400V 50Hz	NC1-1204N 400V 50Hz	221277
12A	4NO	-	AC 400V 60Hz	NC1-1204N 400V 60Hz	221278
12A	4NO	-	AC 415V 50/60Hz	NC1-1204N 415V 50/60Hz	221279
12A	4NO	-	AC 415V 50Hz	NC1-1204N 415V 50Hz	221280
12A	4NO	-	AC 415V 60Hz	NC1-1204N 415V 60Hz	221281
12A	4NO	-	DC 110V	NC1-1204Z 110V	221294
12A	4NO	-	DC 220V	NC1-1204Z 220V	221295
12A	4NO	-	DC 24V	NC1-1204Z 24V	221296
12A	4NO	-	DC 48V	NC1-1204Z 48V	221297

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
12A	2NO+2NC	-	AC 110V 50/60Hz	NC1-1208 110V 50/60Hz	221299
12A	2NO+2NC	-	AC 110V 50Hz	NC1-1208 110V 50Hz	221300
12A	2NO+2NC	-	AC 110V 60Hz	NC1-1208 110V 60Hz	221301
12A	2NO+2NC	-	AC 220V 50/60Hz	NC1-1208 220V 50/60Hz	221305
12A	2NO+2NC	-	AC 220V 50Hz	NC1-1208 220V 50Hz	221306
12A	2NO+2NC	-	AC 220V 60Hz	NC1-1208 220V 60Hz	221307
12A	2NO+2NC	-	AC 230V 50/60Hz	NC1-1208 230V 50/60Hz	221308
12A	2NO+2NC	-	AC 230V 50Hz	NC1-1208 230V 50Hz	221309
12A	2NO+2NC	-	AC 230V 60Hz	NC1-1208 230V 60Hz	221310
12A	2NO+2NC	-	AC 240V 50/60Hz	NC1-1208 240V 50/60Hz	221311
12A	2NO+2NC	-	AC 240V 50Hz	NC1-1208 240V 50Hz	221312
12A	2NO+2NC	-	AC 240V 60Hz	NC1-1208 240V 60Hz	221313
12A	2NO+2NC	-	AC 24V 50/60Hz	NC1-1208 24V 50/60Hz	221314
12A	2NO+2NC	-	AC 24V 50Hz	NC1-1208 24V 50Hz	221315
12A	2NO+2NC	-	AC 24V 60Hz	NC1-1208 24V 60Hz	221316
12A	2NO+2NC	-	AC 380V 50/60Hz	NC1-1208 380V 50/60Hz	221320
12A	2NO+2NC	-	AC 380V 50Hz	NC1-1208 380V 50Hz	221321
12A	2NO+2NC	-	AC 380V 60Hz	NC1-1208 380V 60Hz	221322
12A	2NO+2NC	-	AC 400V 50/60Hz	NC1-1208 400V 50/60Hz	221323
12A	2NO+2NC	-	AC 400V 50Hz	NC1-1208 400V 50Hz	221324
12A	2NO+2NC	-	AC 400V 60Hz	NC1-1208 400V 60Hz	221325
12A	2NO+2NC	-	AC 415V 50/60Hz	NC1-1208 415V 50/60Hz	221326
12A	2NO+2NC	-	AC 415V 50Hz	NC1-1208 415V 50Hz	221327
12A	2NO+2NC	-	AC 415V 60Hz	NC1-1208 415V 60Hz	221328
12A	2NO+2NC	-	AC 440V 50/60Hz	NC1-1208 440V 50/60Hz	221332
12A	2NO+2NC	-	AC 440V 50Hz	NC1-1208 440V 50Hz	221333
12A	2NO+2NC	-	AC 440V 60Hz	NC1-1208 440V 60Hz	221334
12A	2NO+2NC	-	AC 120V 60Hz	NC1-1208 120V 60Hz	225547
12A	2NO+2NC	-	AC 120V 50/60Hz	NC1-1208 120V 50/60Hz	225679
12A	2NO+2NC	-	DC 110V	NC1-1208Z 110V	221341
12A	2NO+2NC	-	DC 220V	NC1-1208Z 220V	221342
12A	2NO+2NC	-	DC 24V	NC1-1208Z 24V	221343
12A	2NO+2NC	-	DC 48V	NC1-1208Z 48V	221344
12A	2NO+2NC	-	DC 30V	NC1-1208Z 30V	226568

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
18A	3NO	1NC	AC 110V 50/60Hz	NC1-1801 110V 50/60Hz	221440
18A	3NO	1NC	AC 110V 50Hz	NC1-1801 110V 50Hz	221441
18A	3NO	1NC	AC 110V 60Hz	NC1-1801 110V 60Hz	221442
18A	3NO	1NC	AC 220V 50/60Hz	NC1-1801 220V 50/60Hz	221446
18A	3NO	1NC	AC 220V 50Hz	NC1-1801 220V 50Hz	221447
18A	3NO	1NC	AC 220V 60Hz	NC1-1801 220V 60Hz	221448
18A	3NO	1NC	AC 230V 50/60Hz	NC1-1801 230V 50/60Hz	221449
18A	3NO	1NC	AC 230V 50Hz	NC1-1801 230V 50Hz	221450
18A	3NO	1NC	AC 230V 60Hz	NC1-1801 230V 60Hz	221451
18A	3NO	1NC	AC 240V 50/60Hz	NC1-1801 240V 50/60Hz	221452
18A	3NO	1NC	AC 240V 50Hz	NC1-1801 240V 50Hz	221453
18A	3NO	1NC	AC 240V 60Hz	NC1-1801 240V 60Hz	221454
18A	3NO	1NC	AC 24V 50/60Hz	NC1-1801 24V 50/60Hz	221455
18A	3NO	1NC	AC 24V 50Hz	NC1-1801 24V 50Hz	221456
18A	3NO	1NC	AC 24V 60Hz	NC1-1801 24V 60Hz	221457
18A	3NO	1NC	AC 380V 50/60Hz	NC1-1801 380V 50/60Hz	221461
18A	3NO	1NC	AC 380V 50Hz	NC1-1801 380V 50Hz	221462
18A	3NO	1NC	AC 380V 60Hz	NC1-1801 380V 60Hz	221463
18A	3NO	1NC	AC 400V 50/60Hz	NC1-1801 400V 50/60Hz	221464
18A	3NO	1NC	AC 400V 50Hz	NC1-1801 400V 50Hz	221465
18A	3NO	1NC	AC 400V 60Hz	NC1-1801 400V 60Hz	221466
18A	3NO	1NC	AC 415V 50/60Hz	NC1-1801 415V 50/60Hz	221467
18A	3NO	1NC	AC 415V 50Hz	NC1-1801 415V 50Hz	221468
18A	3NO	1NC	AC 415V 60Hz	NC1-1801 415V 60Hz	221469
18A	3NO	1NC	AC 440V 50/60Hz	NC1-1801 440V 50/60Hz	221473
18A	3NO	1NC	AC 440V 50Hz	NC1-1801 440V 50Hz	221474
18A	3NO	1NC	AC 440V 60Hz	NC1-1801 440V 60Hz	221475
18A	3NO	1NC	AC 120V 50Hz	NC1-1801 120V 50Hz	225517
18A	3NO	1NC	AC 120V 60Hz	NC1-1801 120V 60Hz	225518
18A	3NO	1NC	AC 120V 50/60Hz	NC1-1801 120V 50/60Hz	225519
18A	3NO	1NC	AC 110V 50/60Hz	NC1-1801N 110V 50/60Hz	221482
18A	3NO	1NC	AC 110V 50Hz	NC1-1801N 110V 50Hz	221483
18A	3NO	1NC	AC 110V 60Hz	NC1-1801N 110V 60Hz	221484
18A	3NO	1NC	AC 220V 50/60Hz	NC1-1801N 220V 50/60Hz	221488
18A	3NO	1NC	AC 220V 50Hz	NC1-1801N 220V 50Hz	221489
18A	3NO	1NC	AC 220V 60Hz	NC1-1801N 220V 60Hz	221490
18A	3NO	1NC	AC 230V 50/60Hz	NC1-1801N 230V 50/60Hz	221491
18A	3NO	1NC	AC 230V 50Hz	NC1-1801N 230V 50Hz	221492
18A	3NO	1NC	AC 230V 60Hz	NC1-1801N 230V 60Hz	221493
18A	3NO	1NC	AC 240V 50/60Hz	NC1-1801N 240V 50/60Hz	221494

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
18A	3NO	1NC	AC 240V 50Hz	NC1-1801N 240V 50Hz	221495
18A	3NO	1NC	AC 240V 60Hz	NC1-1801N 240V 60Hz	221496
18A	3NO	1NC	AC 24V 50/60Hz	NC1-1801N 24V 50/60Hz	221497
18A	3NO	1NC	AC 24V 50Hz	NC1-1801N 24V 50Hz	221498
18A	3NO	1NC	AC 24V 60Hz	NC1-1801N 24V 60Hz	221499
18A	3NO	1NC	AC 380V 50/60Hz	NC1-1801N 380V 50/60Hz	221503
18A	3NO	1NC	AC 380V 50Hz	NC1-1801N 380V 50Hz	221504
18A	3NO	1NC	AC 380V 60Hz	NC1-1801N 380V 60Hz	221505
18A	3NO	1NC	AC 400V 50/60Hz	NC1-1801N 400V 50/60Hz	221506
18A	3NO	1NC	AC 400V 50Hz	NC1-1801N 400V 50Hz	221507
18A	3NO	1NC	AC 400V 60Hz	NC1-1801N 400V 60Hz	221508
18A	3NO	1NC	AC 415V 50/60Hz	NC1-1801N 415V 50/60Hz	221509
18A	3NO	1NC	AC 415V 50Hz	NC1-1801N 415V 50Hz	221510
18A	3NO	1NC	AC 415V 60Hz	NC1-1801N 415V 60Hz	221511
18A	3NO	1NC	AC 120V 50/60Hz	NC1-1801N 120V 50/60Hz	226035
18A	3NO	1NC	DC 110V	NC1-1801Z 110V	221527
18A	3NO	1NC	DC 220V	NC1-1801Z 220V	221528
18A	3NO	1NC	DC 24V	NC1-1801Z 24V	221529
18A	3NO	1NC	DC 48V	NC1-1801Z 48V	221530
18A	3NO	1NO	AC 110V 50/60Hz	NC1-1810 110V 50/60Hz	221532
18A	3NO	1NO	AC 110V 50Hz	NC1-1810 110V 50Hz	221533
18A	3NO	1NO	AC 110V 60Hz	NC1-1810 110V 60Hz	221534
18A	3NO	1NO	AC 120V 50/60Hz	NC1-1810 120V 50/60Hz	221535
18A	3NO	1NO	AC 120V 50Hz	NC1-1810 120V 50Hz	221536
18A	3NO	1NO	AC 120V 60Hz	NC1-1810 120V 60Hz	221537
18A	3NO	1NO	AC 220V 50/60Hz	NC1-1810 220V 50/60Hz	221541
18A	3NO	1NO	AC 220V 50Hz	NC1-1810 220V 50Hz	221542
18A	3NO	1NO	AC 220V 60Hz	NC1-1810 220V 60Hz	221543
18A	3NO	1NO	AC 230V 50/60Hz	NC1-1810 230V 50/60Hz	221544
18A	3NO	1NO	AC 230V 50Hz	NC1-1810 230V 50Hz	221545
18A	3NO	1NO	AC 230V 60Hz	NC1-1810 230V 60Hz	221546
18A	3NO	1NO	AC 240V 50/60Hz	NC1-1810 240V 50/60Hz	221547
18A	3NO	1NO	AC 240V 50Hz	NC1-1810 240V 50Hz	221548
18A	3NO	1NO	AC 240V 60Hz	NC1-1810 240V 60Hz	221549
18A	3NO	1NO	AC 24V 50/60Hz	NC1-1810 24V 50/60Hz	221550
18A	3NO	1NO	AC 24V 50Hz	NC1-1810 24V 50Hz	221551
18A	3NO	1NO	AC 24V 60Hz	NC1-1810 24V 60Hz	221552
18A	3NO	1NO	AC 380V 50/60Hz	NC1-1810 380V 50/60Hz	221556
18A	3NO	1NO	AC 380V 50Hz	NC1-1810 380V 50Hz	221557
18A	3NO	1NO	AC 380V 60Hz	NC1-1810 380V 60Hz	221558

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
18A	3NO	1NO	AC 400V 50/60Hz	NC1-1810 400V 50/60Hz	221559
18A	3NO	1NO	AC 400V 50Hz	NC1-1810 400V 50Hz	221560
18A	3NO	1NO	AC 400V 60Hz	NC1-1810 400V 60Hz	221561
18A	3NO	1NO	AC 415V 50/60Hz	NC1-1810 415V 50/60Hz	221562
18A	3NO	1NO	AC 415V 50Hz	NC1-1810 415V 50Hz	221563
18A	3NO	1NO	AC 415V 60Hz	NC1-1810 415V 60Hz	221564
18A	3NO	1NO	AC 440V 50/60Hz	NC1-1810 440V 50/60Hz	221565
18A	3NO	1NO	AC 440V 50Hz	NC1-1810 440V 50Hz	221566
18A	3NO	1NO	AC 440V 60Hz	NC1-1810 440V 60Hz	221567
18A	3NO	1NO	AC 110V 50/60Hz	NC1-1810N 110V 50/60Hz	221574
18A	3NO	1NO	AC 110V 50Hz	NC1-1810N 110V 50Hz	221575
18A	3NO	1NO	AC 110V 60Hz	NC1-1810N 110V 60Hz	221576
18A	3NO	1NO	AC 220V 50/60Hz	NC1-1810N 220V 50/60Hz	221580
18A	3NO	1NO	AC 220V 50Hz	NC1-1810N 220V 50Hz	221581
18A	3NO	1NO	AC 220V 60Hz	NC1-1810N 220V 60Hz	221582
18A	3NO	1NO	AC 230V 50/60Hz	NC1-1810N 230V 50/60Hz	221583
18A	3NO	1NO	AC 230V 50Hz	NC1-1810N 230V 50Hz	221584
18A	3NO	1NO	AC 230V 60Hz	NC1-1810N 230V 60Hz	221585
18A	3NO	1NO	AC 240V 50/60Hz	NC1-1810N 240V 50/60Hz	221586
18A	3NO	1NO	AC 240V 50Hz	NC1-1810N 240V 50Hz	221587
18A	3NO	1NO	AC 240V 60Hz	NC1-1810N 240V 60Hz	221588
18A	3NO	1NO	AC 24V 50/60Hz	NC1-1810N 24V 50/60Hz	221589
18A	3NO	1NO	AC 24V 50Hz	NC1-1810N 24V 50Hz	221590
18A	3NO	1NO	AC 24V 60Hz	NC1-1810N 24V 60Hz	221591
18A	3NO	1NO	AC 380V 50/60Hz	NC1-1810N 380V 50/60Hz	221595
18A	3NO	1NO	AC 380V 50Hz	NC1-1810N 380V 50Hz	221596
18A	3NO	1NO	AC 380V 60Hz	NC1-1810N 380V 60Hz	221597
18A	3NO	1NO	AC 400V 50/60Hz	NC1-1810N 400V 50/60Hz	221598
18A	3NO	1NO	AC 400V 50Hz	NC1-1810N 400V 50Hz	221599
18A	3NO	1NO	AC 400V 60Hz	NC1-1810N 400V 60Hz	221600
18A	3NO	1NO	AC 415V 50/60Hz	NC1-1810N 415V 50/60Hz	221601
18A	3NO	1NO	AC 415V 50Hz	NC1-1810N 415V 50Hz	221602
18A	3NO	1NO	AC 415V 60Hz	NC1-1810N 415V 60Hz	221603
18A	3NO	1NO	AC 120V 50/60Hz	NC1-1810N 120V 50/60Hz	226027
18A	3NO	1NO	DC 110V	NC1-1810Z 110V	221619
18A	3NO	1NO	DC 220V	NC1-1810Z 220V	221620
18A	3NO	1NO	DC 24V	NC1-1810Z 24V	221621
18A	3NO	1NO	DC 48V	NC1-1810Z 48V	221622

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	3NO	1NC	AC 110V 50/60Hz	NC1-2501 110V 50/60Hz	221624
25A	3NO	1NC	AC 110V 50Hz	NC1-2501 110V 50Hz	221625
25A	3NO	1NC	AC 110V 60Hz	NC1-2501 110V 60Hz	221626
25A	3NO	1NC	AC 220V 50/60Hz	NC1-2501 220V 50/60Hz	221630
25A	3NO	1NC	AC 220V 50Hz	NC1-2501 220V 50Hz	221631
25A	3NO	1NC	AC 220V 60Hz	NC1-2501 220V 60Hz	221632
25A	3NO	1NC	AC 230V 50/60Hz	NC1-2501 230V 50/60Hz	221633
25A	3NO	1NC	AC 230V 50Hz	NC1-2501 230V 50Hz	221634
25A	3NO	1NC	AC 230V 60Hz	NC1-2501 230V 60Hz	221635
25A	3NO	1NC	AC 240V 50/60Hz	NC1-2501 240V 50/60Hz	221636
25A	3NO	1NC	AC 240V 50Hz	NC1-2501 240V 50Hz	221637
25A	3NO	1NC	AC 240V 60Hz	NC1-2501 240V 60Hz	221638
25A	3NO	1NC	AC 24V 50/60Hz	NC1-2501 24V 50/60Hz	221639
25A	3NO	1NC	AC 24V 50Hz	NC1-2501 24V 50Hz	221640
25A	3NO	1NC	AC 24V 60Hz	NC1-2501 24V 60Hz	221641
25A	3NO	1NC	AC 380V 50/60Hz	NC1-2501 380V 50/60Hz	221645
25A	3NO	1NC	AC 380V 50Hz	NC1-2501 380V 50Hz	221646
25A	3NO	1NC	AC 380V 60Hz	NC1-2501 380V 60Hz	221647
25A	3NO	1NC	AC 400V 50/60Hz	NC1-2501 400V 50/60Hz	221648
25A	3NO	1NC	AC 400V 50Hz	NC1-2501 400V 50Hz	221649
25A	3NO	1NC	AC 400V 60Hz	NC1-2501 400V 60Hz	221650
25A	3NO	1NC	AC 415V 50/60Hz	NC1-2501 415V 50/60Hz	221651
25A	3NO	1NC	AC 415V 50Hz	NC1-2501 415V 50Hz	221652
25A	3NO	1NC	AC 415V 60Hz	NC1-2501 415V 60Hz	221653
25A	3NO	1NC	AC 440V 50/60Hz	NC1-2501 440V 50/60Hz	221657
25A	3NO	1NC	AC 440V 50Hz	NC1-2501 440V 50Hz	221658
25A	3NO	1NC	AC 440V 60Hz	NC1-2501 440V 60Hz	221659
25A	3NO	1NC	AC 120V 50/60Hz	NC1-2501 120V 50/60Hz	225515
25A	3NO	1NC	AC 120V 50Hz	NC1-2501 120V 50Hz	225520
25A	3NO	1NC	AC 120V 60Hz	NC1-2501 120V 60Hz	225521
25A	3NO	1NC	AC 110V 50/60Hz	NC1-2501N 110V 50/60Hz	221666
25A	3NO	1NC	AC 110V 50Hz	NC1-2501N 110V 50Hz	221667
25A	3NO	1NC	AC 110V 60Hz	NC1-2501N 110V 60Hz	221668
25A	3NO	1NC	AC 220V 50/60Hz	NC1-2501N 220V 50/60Hz	221672
25A	3NO	1NC	AC 220V 50Hz	NC1-2501N 220V 50Hz	221673
25A	3NO	1NC	AC 220V 60Hz	NC1-2501N 220V 60Hz	221674
25A	3NO	1NC	AC 230V 50/60Hz	NC1-2501N 230V 50/60Hz	221675
25A	3NO	1NC	AC 230V 50Hz	NC1-2501N 230V 50Hz	221676
25A	3NO	1NC	AC 230V 60Hz	NC1-2501N 230V 60Hz	221677
25A	3NO	1NC	AC 240V 50/60Hz	NC1-2501N 240V 50/60Hz	221678
25A	3NO	1NC	AC 240V 50Hz	NC1-2501N 240V 50Hz	221679
25A	3NO	1NC	AC 240V 60Hz	NC1-2501N 240V 60Hz	221680
25A	3NO	1NC	AC 24V 50/60Hz	NC1-2501N 24V 50/60Hz	221681
25A	3NO	1NC	AC 24V 50Hz	NC1-2501N 24V 50Hz	221682
25A	3NO	1NC	AC 24V 60Hz	NC1-2501N 24V 60Hz	221683

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	3NO	1NC	AC 380V 50/60Hz	NC1-2501N 380V 50/60Hz	221687
25A	3NO	1NC	AC 380V 50Hz	NC1-2501N 380V 50Hz	221688
25A	3NO	1NC	AC 380V 60Hz	NC1-2501N 380V 60Hz	221689
25A	3NO	1NC	AC 400V 50/60Hz	NC1-2501N 400V 50/60Hz	221690
25A	3NO	1NC	AC 400V 50Hz	NC1-2501N 400V 50Hz	221691
25A	3NO	1NC	AC 400V 60Hz	NC1-2501N 400V 60Hz	221692
25A	3NO	1NC	AC 415V 50/60Hz	NC1-2501N 415V 50/60Hz	221693
25A	3NO	1NC	AC 415V 50Hz	NC1-2501N 415V 50Hz	221694
25A	3NO	1NC	AC 415V 60Hz	NC1-2501N 415V 60Hz	221695
25A	3NO	1NC	AC 120V 50/60Hz	NC1-2501N 120V 50/60Hz	226029
25A	3NO	1NC	DC 110V	NC1-2501Z 110V	221711
25A	3NO	1NC	DC 220V	NC1-2501Z 220V	221712
25A	3NO	1NC	DC 24V	NC1-2501Z 24V	221713
25A	3NO	1NC	DC 48V	NC1-2501Z 48V	221714
25A	3NO	1NO	AC 110V 50/60Hz	NC1-2510 110V 50/60Hz	221852
25A	3NO	1NO	AC 110V 50Hz	NC1-2510 110V 50Hz	221853
25A	3NO	1NO	AC 110V 60Hz	NC1-2510 110V 60Hz	221854
25A	3NO	1NO	AC 120V 50/60Hz	NC1-2510 120V 50/60Hz	221855
25A	3NO	1NO	AC 120V 50Hz	NC1-2510 120V 50Hz	221856
25A	3NO	1NO	AC 120V 60Hz	NC1-2510 120V 60Hz	221857
25A	3NO	1NO	AC 220V 50/60Hz	NC1-2510 220V 50/60Hz	221861
25A	3NO	1NO	AC 220V 50Hz	NC1-2510 220V 50Hz	221862
25A	3NO	1NO	AC 220V 60Hz	NC1-2510 220V 60Hz	221863
25A	3NO	1NO	AC 230V 50/60Hz	NC1-2510 230V 50/60Hz	221864
25A	3NO	1NO	AC 230V 50Hz	NC1-2510 230V 50Hz	221865
25A	3NO	1NO	AC 230V 60Hz	NC1-2510 230V 60Hz	221866
25A	3NO	1NO	AC 240V 50/60Hz	NC1-2510 240V 50/60Hz	221867
25A	3NO	1NO	AC 240V 50Hz	NC1-2510 240V 50Hz	221868
25A	3NO	1NO	AC 240V 60Hz	NC1-2510 240V 60Hz	221869
25A	3NO	1NO	AC 24V 50/60Hz	NC1-2510 24V 50/60Hz	221870
25A	3NO	1NO	AC 24V 50Hz	NC1-2510 24V 50Hz	221871
25A	3NO	1NO	AC 24V 60Hz	NC1-2510 24V 60Hz	221872
25A	3NO	1NO	AC 380V 50/60Hz	NC1-2510 380V 50/60Hz	221876
25A	3NO	1NO	AC 380V 50Hz	NC1-2510 380V 50Hz	221877
25A	3NO	1NO	AC 380V 60Hz	NC1-2510 380V 60Hz	221878
25A	3NO	1NO	AC 400V 50/60Hz	NC1-2510 400V 50/60Hz	221879
25A	3NO	1NO	AC 400V 50Hz	NC1-2510 400V 50Hz	221880
25A	3NO	1NO	AC 400V 60Hz	NC1-2510 400V 60Hz	221881
25A	3NO	1NO	AC 415V 50/60Hz	NC1-2510 415V 50/60Hz	221882
25A	3NO	1NO	AC 415V 50Hz	NC1-2510 415V 50Hz	221883
25A	3NO	1NO	AC 415V 60Hz	NC1-2510 415V 60Hz	221884
25A	3NO	1NO	AC 440V 50/60Hz	NC1-2510 440V 50/60Hz	221888
25A	3NO	1NO	AC 440V 50Hz	NC1-2510 440V 50Hz	221889
25A	3NO	1NO	AC 440V 60Hz	NC1-2510 440V 60Hz	221890
25A	3NO	1NO	AC 110V 50/60Hz	NC1-2510N 110V 50/60Hz	221897

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	3NO	1NO	AC 110V 50Hz	NC1-2510N 110V 50Hz	221898
25A	3NO	1NO	AC 110V 60Hz	NC1-2510N 110V 60Hz	221899
25A	3NO	1NO	AC 220V 50/60Hz	NC1-2510N 220V 50/60Hz	221903
25A	3NO	1NO	AC 220V 50Hz	NC1-2510N 220V 50Hz	221904
25A	3NO	1NO	AC 220V 60Hz	NC1-2510N 220V 60Hz	221905
25A	3NO	1NO	AC 230V 50/60Hz	NC1-2510N 230V 50/60Hz	221906
25A	3NO	1NO	AC 230V 50Hz	NC1-2510N 230V 50Hz	221907
25A	3NO	1NO	AC 230V 60Hz	NC1-2510N 230V 60Hz	221908
25A	3NO	1NO	AC 240V 50/60Hz	NC1-2510N 240V 50/60Hz	221909
25A	3NO	1NO	AC 240V 50Hz	NC1-2510N 240V 50Hz	221910
25A	3NO	1NO	AC 240V 60Hz	NC1-2510N 240V 60Hz	221911
25A	3NO	1NO	AC 24V 50/60Hz	NC1-2510N 24V 50/60Hz	221912
25A	3NO	1NO	AC 24V 50Hz	NC1-2510N 24V 50Hz	221913
25A	3NO	1NO	AC 24V 60Hz	NC1-2510N 24V 60Hz	221914
25A	3NO	1NO	AC 380V 50/60Hz	NC1-2510N 380V 50/60Hz	221918
25A	3NO	1NO	AC 380V 50Hz	NC1-2510N 380V 50Hz	221919
25A	3NO	1NO	AC 380V 60Hz	NC1-2510N 380V 60Hz	221920
25A	3NO	1NO	AC 400V 50/60Hz	NC1-2510N 400V 50/60Hz	221921
25A	3NO	1NO	AC 400V 50Hz	NC1-2510N 400V 50Hz	221922
25A	3NO	1NO	AC 400V 60Hz	NC1-2510N 400V 60Hz	221923
25A	3NO	1NO	AC 415V 50/60Hz	NC1-2510N 415V 50/60Hz	221924
25A	3NO	1NO	AC 415V 50Hz	NC1-2510N 415V 50Hz	221925
25A	3NO	1NO	AC 415V 60Hz	NC1-2510N 415V 60Hz	221926
25A	3NO	1NO	AC 120V 50/60Hz	NC1-2510N 120V 50/60Hz	226028
25A	3NO	1NO	DC 110V	NC1-2510Z 110V	221942
25A	3NO	1NO	DC 220V	NC1-2510Z 220V	221943
25A	3NO	1NO	DC 24V	NC1-2510Z 24V	221944
25A	3NO	1NO	DC 48V	NC1-2510Z 48V	221945
25A	3NO	1NO	DC 230V	NC1-2510Z?230V	225940
25A	4NO	-	AC 110V 50/60Hz	NC1-2504 110V 50/60Hz	221716
25A	4NO	-	AC 110V 50Hz	NC1-2504 110V 50Hz	221717
25A	4NO	-	AC 110V 60Hz	NC1-2504 110V 60Hz	221718
25A	4NO	-	AC 220V 50/60Hz	NC1-2504 220V 50/60Hz	221722
25A	4NO	-	AC 220V 50Hz	NC1-2504 220V 50Hz	221723
25A	4NO	-	AC 220V 60Hz	NC1-2504 220V 60Hz	221724
25A	4NO	-	AC 230V 50/60Hz	NC1-2504 230V 50/60Hz	221725
25A	4NO	-	AC 230V 50Hz	NC1-2504 230V 50Hz	221726
25A	4NO	-	AC 230V 60Hz	NC1-2504 230V 60Hz	221727
25A	4NO	-	AC 240V 50/60Hz	NC1-2504 240V 50/60Hz	221728
25A	4NO	-	AC 240V 50Hz	NC1-2504 240V 50Hz	221729
25A	4NO	-	AC 240V 60Hz	NC1-2504 240V 60Hz	221730
25A	4NO	-	AC 24V 50/60Hz	NC1-2504 24V 50/60Hz	221731
25A	4NO	-	AC 24V 50Hz	NC1-2504 24V 50Hz	221732
25A	4NO	-	AC 24V 60Hz	NC1-2504 24V 60Hz	221733
25A	4NO	-	AC 380V 50/60Hz	NC1-2504 380V 50/60Hz	221737

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	4NO	-	AC 380V 50Hz	NC1-2504 380V 50Hz	221738
25A	4NO	-	AC 380V 60Hz	NC1-2504 380V 60Hz	221739
25A	4NO	-	AC 400V 50/60Hz	NC1-2504 400V 50/60Hz	221740
25A	4NO	-	AC 400V 50Hz	NC1-2504 400V 50Hz	221741
25A	4NO	-	AC 400V 60Hz	NC1-2504 400V 60Hz	221742
25A	4NO	-	AC 415V 50/60Hz	NC1-2504 415V 50/60Hz	221743
25A	4NO	-	AC 415V 50Hz	NC1-2504 415V 50Hz	221744
25A	4NO	-	AC 415V 60Hz	NC1-2504 415V 60Hz	221745
25A	4NO	-	AC 440V 50/60Hz	NC1-2504 440V 50/60Hz	221749
25A	4NO	-	AC 440V 50Hz	NC1-2504 440V 50Hz	221750
25A	4NO	-	AC 440V 60Hz	NC1-2504 440V 60Hz	221751
25A	4NO	-	AC 120V 60Hz	NC1-2504 120V 60Hz	225528
25A	4NO	-	AC 120V 50/60Hz	NC1-2504 120V 50/60Hz	225827
25A	4NO	-	AC 110V 50/60Hz	NC1-2504N 110V 50/60Hz	221758
25A	4NO	-	AC 110V 50Hz	NC1-2504N 110V 50Hz	221759
25A	4NO	-	AC 110V 60Hz	NC1-2504N 110V 60Hz	221760
25A	4NO	-	AC 220V 50/60Hz	NC1-2504N 220V 50/60Hz	221764
25A	4NO	-	AC 220V 50Hz	NC1-2504N 220V 50Hz	221765
25A	4NO	-	AC 220V 60Hz	NC1-2504N 220V 60Hz	221766
25A	4NO	-	AC 230V 50/60Hz	NC1-2504N 230V 50/60Hz	221767
25A	4NO	-	AC 230V 50Hz	NC1-2504N 230V 50Hz	221768
25A	4NO	-	AC 230V 60Hz	NC1-2504N 230V 60Hz	221769
25A	4NO	-	AC 240V 50/60Hz	NC1-2504N 240V 50/60Hz	221770
25A	4NO	-	AC 240V 50Hz	NC1-2504N 240V 50Hz	221771
25A	4NO	-	AC 240V 60Hz	NC1-2504N 240V 60Hz	221772
25A	4NO	-	AC 24V 50/60Hz	NC1-2504N 24V 50/60Hz	221773
25A	4NO	-	AC 24V 50Hz	NC1-2504N 24V 50Hz	221774
25A	4NO	-	AC 24V 60Hz	NC1-2504N 24V 60Hz	221775
25A	4NO	-	AC 380V 50/60Hz	NC1-2504N 380V 50/60Hz	221779
25A	4NO	-	AC 380V 50Hz	NC1-2504N 380V 50Hz	221780
25A	4NO	-	AC 380V 60Hz	NC1-2504N 380V 60Hz	221781
25A	4NO	-	AC 400V 50/60Hz	NC1-2504N 400V 50/60Hz	221782
25A	4NO	-	AC 400V 50Hz	NC1-2504N 400V 50Hz	221783
25A	4NO	-	AC 400V 60Hz	NC1-2504N 400V 60Hz	221784
25A	4NO	-	AC 415V 50/60Hz	NC1-2504N 415V 50/60Hz	221785
25A	4NO	-	AC 415V 50Hz	NC1-2504N 415V 50Hz	221786
25A	4NO	-	AC 415V 60Hz	NC1-2504N 415V 60Hz	221787
25A	4NO	-	DC 110V	NC1-2504Z 110V	221800
25A	4NO	-	DC 220V	NC1-2504Z 220V	221801
25A	4NO	-	DC 24V	NC1-2504Z 24V	221802
25A	4NO	-	DC 48V	NC1-2504Z 48V	221803
25A	4NO	-	DC 125V	NC1-2504Z 125V	225995
25A	2NO+2NC	-	AC 110V 50/60Hz	NC1-2508 110V 50/60Hz	221805
25A	2NO+2NC	-	AC 110V 50Hz	NC1-2508 110V 50Hz	221806
25A	2NO+2NC	-	AC 110V 60Hz	NC1-2508 110V 60Hz	221807

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
25A	2NO+2NC	-	AC 220V 50/60Hz	NC1-2508 220V 50/60Hz	221811
25A	2NO+2NC	-	AC 220V 50Hz	NC1-2508 220V 50Hz	221812
25A	2NO+2NC	-	AC 220V 60Hz	NC1-2508 220V 60Hz	221813
25A	2NO+2NC	-	AC 230V 50/60Hz	NC1-2508 230V 50/60Hz	221814
25A	2NO+2NC	-	AC 230V 50Hz	NC1-2508 230V 50Hz	221815
25A	2NO+2NC	-	AC 230V 60Hz	NC1-2508 230V 60Hz	221816
25A	2NO+2NC	-	AC 240V 50/60Hz	NC1-2508 240V 50/60Hz	221817
25A	2NO+2NC	-	AC 240V 50Hz	NC1-2508 240V 50Hz	221818
25A	2NO+2NC	-	AC 240V 60Hz	NC1-2508 240V 60Hz	221819
25A	2NO+2NC	-	AC 24V 50/60Hz	NC1-2508 24V 50/60Hz	221820
25A	2NO+2NC	-	AC 24V 50Hz	NC1-2508 24V 50Hz	221821
25A	2NO+2NC	-	AC 24V 60Hz	NC1-2508 24V 60Hz	221822
25A	2NO+2NC	-	AC 380V 50/60Hz	NC1-2508 380V 50/60Hz	221826
25A	2NO+2NC	-	AC 380V 50Hz	NC1-2508 380V 50Hz	221827
25A	2NO+2NC	-	AC 380V 60Hz	NC1-2508 380V 60Hz	221828
25A	2NO+2NC	-	AC 400V 50/60Hz	NC1-2508 400V 50/60Hz	221829
25A	2NO+2NC	-	AC 400V 50Hz	NC1-2508 400V 50Hz	221830
25A	2NO+2NC	-	AC 400V 60Hz	NC1-2508 400V 60Hz	221831
25A	2NO+2NC	-	AC 415V 50/60Hz	NC1-2508 415V 50/60Hz	221832
25A	2NO+2NC	-	AC 415V 50Hz	NC1-2508 415V 50Hz	221833
25A	2NO+2NC	-	AC 415V 60Hz	NC1-2508 415V 60Hz	221834
25A	2NO+2NC	-	AC 440V 50/60Hz	NC1-2508 440V 50/60Hz	221838
25A	2NO+2NC	-	AC 440V 50Hz	NC1-2508 440V 50Hz	221839
25A	2NO+2NC	-	AC 440V 60Hz	NC1-2508 440V 60Hz	221840
25A	2NO+2NC	-	AC 120V 60Hz	NC1-2508 120V 60Hz	225546
25A	2NO+2NC	-	AC 120V 50/60Hz	NC1-2508 120V 50/60Hz	225571
25A	2NO+2NC	-	DC 110V	NC1-2508Z 110V	221847
25A	2NO+2NC	-	DC 220V	NC1-2508Z 220V	221848
25A	2NO+2NC	-	DC 24V	NC1-2508Z 24V	221849
25A	2NO+2NC	-	DC 48V	NC1-2508Z 48V	221850

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
32A	3NO	1NC	AC 110V 50/60Hz	NC1-3201 110V 50/60Hz	221947
32A	3NO	1NC	AC 110V 50Hz	NC1-3201 110V 50Hz	221948
32A	3NO	1NC	AC 110V 60Hz	NC1-3201 110V 60Hz	221949
32A	3NO	1NC	AC 220V 50/60Hz	NC1-3201 220V 50/60Hz	221953
32A	3NO	1NC	AC 220V 50Hz	NC1-3201 220V 50Hz	221954
32A	3NO	1NC	AC 220V 60Hz	NC1-3201 220V 60Hz	221955
32A	3NO	1NC	AC 230V 50/60Hz	NC1-3201 230V 50/60Hz	221956
32A	3NO	1NC	AC 230V 50Hz	NC1-3201 230V 50Hz	221957
32A	3NO	1NC	AC 230V 60Hz	NC1-3201 230V 60Hz	221958
32A	3NO	1NC	AC 240V 50/60Hz	NC1-3201 240V 50/60Hz	221959
32A	3NO	1NC	AC 240V 50Hz	NC1-3201 240V 50Hz	221960
32A	3NO	1NC	AC 240V 60Hz	NC1-3201 240V 60Hz	221961
32A	3NO	1NC	AC 24V 50/60Hz	NC1-3201 24V 50/60Hz	221962
32A	3NO	1NC	AC 24V 50Hz	NC1-3201 24V 50Hz	221963
32A	3NO	1NC	AC 24V 60Hz	NC1-3201 24V 60Hz	221964
32A	3NO	1NC	AC 380V 50/60Hz	NC1-3201 380V 50/60Hz	221968
32A	3NO	1NC	AC 380V 50Hz	NC1-3201 380V 50Hz	221969
32A	3NO	1NC	AC 380V 60Hz	NC1-3201 380V 60Hz	221970
32A	3NO	1NC	AC 400V 50/60Hz	NC1-3201 400V 50/60Hz	221971
32A	3NO	1NC	AC 400V 50Hz	NC1-3201 400V 50Hz	221972
32A	3NO	1NC	AC 400V 60Hz	NC1-3201 400V 60Hz	221973
32A	3NO	1NC	AC 415V 50/60Hz	NC1-3201 415V 50/60Hz	221974
32A	3NO	1NC	AC 415V 50Hz	NC1-3201 415V 50Hz	221975
32A	3NO	1NC	AC 415V 60Hz	NC1-3201 415V 60Hz	221976
32A	3NO	1NC	AC 440V 50/60Hz	NC1-3201 440V 50/60Hz	221980
32A	3NO	1NC	AC 440V 50Hz	NC1-3201 440V 50Hz	221981
32A	3NO	1NC	AC 440V 60Hz	NC1-3201 440V 60Hz	221982
32A	3NO	1NC	AC 120V 50/60Hz	NC1-3201 120V 50/60Hz	225516
32A	3NO	1NC	AC 120V 60Hz	NC1-3201 120V 60Hz	225522
32A	3NO	1NC	AC 120V 50Hz	NC1-3201 120V 50Hz	225523
32A	3NO	1NC	AC 110V 50/60Hz	NC1-3201N 110V 50/60Hz	221989
32A	3NO	1NC	AC 110V 50Hz	NC1-3201N 110V 50Hz	221990
32A	3NO	1NC	AC 110V 60Hz	NC1-3201N 110V 60Hz	221991
32A	3NO	1NC	AC 220V 50/60Hz	NC1-3201N 220V 50/60Hz	221995
32A	3NO	1NC	AC 220V 50Hz	NC1-3201N 220V 50Hz	221996
32A	3NO	1NC	AC 220V 60Hz	NC1-3201N 220V 60Hz	221997
32A	3NO	1NC	AC 230V 50/60Hz	NC1-3201N 230V 50/60Hz	221998
32A	3NO	1NC	AC 230V 50Hz	NC1-3201N 230V 50Hz	221999
32A	3NO	1NC	AC 230V 60Hz	NC1-3201N 230V 60Hz	222000
32A	3NO	1NC	AC 240V 50/60Hz	NC1-3201N 240V 50/60Hz	222001

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
32A	3NO	1NC	AC 240V 50Hz	NC1-3201N 240V 50Hz	222002
32A	3NO	1NC	AC 240V 60Hz	NC1-3201N 240V 60Hz	222003
32A	3NO	1NC	AC 24V 50/60Hz	NC1-3201N 24V 50/60Hz	222004
32A	3NO	1NC	AC 24V 50Hz	NC1-3201N 24V 50Hz	222005
32A	3NO	1NC	AC 24V 60Hz	NC1-3201N 24V 60Hz	222006
32A	3NO	1NC	AC 380V 50/60Hz	NC1-3201N 380V 50/60Hz	222010
32A	3NO	1NC	AC 380V 50Hz	NC1-3201N 380V 50Hz	222011
32A	3NO	1NC	AC 380V 60Hz	NC1-3201N 380V 60Hz	222012
32A	3NO	1NC	AC 400V 50/60Hz	NC1-3201N 400V 50/60Hz	222013
32A	3NO	1NC	AC 400V 50Hz	NC1-3201N 400V 50Hz	222014
32A	3NO	1NC	AC 400V 60Hz	NC1-3201N 400V 60Hz	222015
32A	3NO	1NC	AC 415V 50/60Hz	NC1-3201N 415V 50/60Hz	222016
32A	3NO	1NC	AC 415V 50Hz	NC1-3201N 415V 50Hz	222017
32A	3NO	1NC	AC 415V 60Hz	NC1-3201N 415V 60Hz	222018
32A	3NO	1NC	AC 120V 60Hz	NC1-3201N 120V 60Hz	225574
32A	3NO	1NC	AC 120V 50/60Hz	NC1-3201N 120V 50/60Hz	226031
32A	3NO	1NC	DC 110V	NC1-3201Z 110V	222034
32A	3NO	1NC	DC 220V	NC1-3201Z 220V	222035
32A	3NO	1NC	DC 24V	NC1-3201Z 24V	222036
32A	3NO	1NC	DC 48V	NC1-3201Z 48V	222037
32A	3NO	1NO	AC 110V 50/60Hz	NC1-3210 110V 50/60Hz	222039
32A	3NO	1NO	AC 110V 50Hz	NC1-3210 110V 50Hz	222040
32A	3NO	1NO	AC 110V 60Hz	NC1-3210 110V 60Hz	222041
32A	3NO	1NO	AC 120V 50/60Hz	NC1-3210 120V 50/60Hz	222042
32A	3NO	1NO	AC 120V 50Hz	NC1-3210 120V 50Hz	222043
32A	3NO	1NO	AC 120V 60Hz	NC1-3210 120V 60Hz	222044
32A	3NO	1NO	AC 220V 50/60Hz	NC1-3210 220V 50/60Hz	222048
32A	3NO	1NO	AC 220V 50Hz	NC1-3210 220V 50Hz	222049
32A	3NO	1NO	AC 220V 60Hz	NC1-3210 220V 60Hz	222050
32A	3NO	1NO	AC 230V 50Hz	NC1-3210 230V 50Hz	222051
32A	3NO	1NO	AC 230V 60Hz	NC1-3210 230V 60Hz	222052
32A	3NO	1NO	AC 240V 50/60Hz	NC1-3210 240V 50/60Hz	222053
32A	3NO	1NO	AC 240V 50Hz	NC1-3210 240V 50Hz	222054
32A	3NO	1NO	AC 240V 60Hz	NC1-3210 240V 60Hz	222055
32A	3NO	1NO	AC 24V 50/60Hz	NC1-3210 24V 50/60Hz	222056
32A	3NO	1NO	AC 24V 50Hz	NC1-3210 24V 50Hz	222057
32A	3NO	1NO	AC 24V 60Hz	NC1-3210 24V 60Hz	222058
32A	3NO	1NO	AC 380V 50/60Hz	NC1-3210 380V 50/60Hz	222062
32A	3NO	1NO	AC 380V 50Hz	NC1-3210 380V 50Hz	222063
32A	3NO	1NO	AC 380V 60Hz	NC1-3210 380V 60Hz	222064

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
32A	3NO	1NO	AC 400V 50/60Hz	NC1-3210 400V 50/60Hz	222065
32A	3NO	1NO	AC 400V 50Hz	NC1-3210 400V 50Hz	222066
32A	3NO	1NO	AC 400V 60Hz	NC1-3210 400V 60Hz	222067
32A	3NO	1NO	AC 415V 50/60Hz	NC1-3210 415V 50/60Hz	222068
32A	3NO	1NO	AC 415V 50Hz	NC1-3210 415V 50Hz	222069
32A	3NO	1NO	AC 415V 60Hz	NC1-3210 415V 60Hz	222070
32A	3NO	1NO	AC 440V 50/60Hz	NC1-3210 440V 50/60Hz	222074
32A	3NO	1NO	AC 440V 50Hz	NC1-3210 440V 50Hz	222075
32A	3NO	1NO	AC 440V 60Hz	NC1-3210 440V 60Hz	222076
32A	3NO	1NO	AC 230V 50/60Hz	NC1-3210 230V 50/60Hz	225514
32A	3NO	1NO	AC 110V 50/60Hz	NC1-3210N 110V 50/60Hz	222083
32A	3NO	1NO	AC 110V 50Hz	NC1-3210N 110V 50Hz	222084
32A	3NO	1NO	AC 110V 60Hz	NC1-3210N 110V 60Hz	222085
32A	3NO	1NO	AC 220V 50/60Hz	NC1-3210N 220V 50/60Hz	222089
32A	3NO	1NO	AC 220V 50Hz	NC1-3210N 220V 50Hz	222090
32A	3NO	1NO	AC 220V 60Hz	NC1-3210N 220V 60Hz	222091
32A	3NO	1NO	AC 230V 50/60Hz	NC1-3210N 230V 50/60Hz	222092
32A	3NO	1NO	AC 230V 50Hz	NC1-3210N 230V 50Hz	222093
32A	3NO	1NO	AC 230V 60Hz	NC1-3210N 230V 60Hz	222094
32A	3NO	1NO	AC 240V 50/60Hz	NC1-3210N 240V 50/60Hz	222095
32A	3NO	1NO	AC 240V 50Hz	NC1-3210N 240V 50Hz	222096
32A	3NO	1NO	AC 240V 60Hz	NC1-3210N 240V 60Hz	222097
32A	3NO	1NO	AC 24V 50/60Hz	NC1-3210N 24V 50/60Hz	222098
32A	3NO	1NO	AC 24V 50Hz	NC1-3210N 24V 50Hz	222099
32A	3NO	1NO	AC 24V 60Hz	NC1-3210N 24V 60Hz	222100
32A	3NO	1NO	AC 380V 50/60Hz	NC1-3210N 380V 50/60Hz	222104
32A	3NO	1NO	AC 380V 50Hz	NC1-3210N 380V 50Hz	222105
32A	3NO	1NO	AC 380V 60Hz	NC1-3210N 380V 60Hz	222106
32A	3NO	1NO	AC 400V 50/60Hz	NC1-3210N 400V 50/60Hz	222107
32A	3NO	1NO	AC 400V 50Hz	NC1-3210N 400V 50Hz	222108
32A	3NO	1NO	AC 400V 60Hz	NC1-3210N 400V 60Hz	222109
32A	3NO	1NO	AC 415V 50/60Hz	NC1-3210N 415V 50/60Hz	222110
32A	3NO	1NO	AC 415V 50Hz	NC1-3210N 415V 50Hz	222111
32A	3NO	1NO	AC 415V 60Hz	NC1-3210N 415V 60Hz	222112
32A	3NO	1NO	AC 120V 50/60Hz	NC1-3210N 120V 50/60Hz	253665
32A	3NO	1NO	DC 110V	NC1-3210Z 110V	222128
32A	3NO	1NO	DC 220V	NC1-3210Z 220V	222129
32A	3NO	1NO	DC 24V	NC1-3210Z 24V	222130
32A	3NO	1NO	DC 48V	NC1-3210Z 48V	222131

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
40A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-4011 110V 50/60Hz	222259
40A	3NO	1NO+1NC	AC 110V 50Hz	NC1-4011 110V 50Hz	222260
40A	3NO	1NO+1NC	AC 110V 60Hz	NC1-4011 110V 60Hz	222261
40A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-4011 120V 50/60Hz	222262
40A	3NO	1NO+1NC	AC 120V 50Hz	NC1-4011 120V 50Hz	222263
40A	3NO	1NO+1NC	AC 120V 60Hz	NC1-4011 120V 60Hz	222264
40A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-4011 220V 50/60Hz	222268
40A	3NO	1NO+1NC	AC 220V 50Hz	NC1-4011 220V 50Hz	222269
40A	3NO	1NO+1NC	AC 220V 60Hz	NC1-4011 220V 60Hz	222270
40A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-4011 230V 50/60Hz	222271
40A	3NO	1NO+1NC	AC 230V 50Hz	NC1-4011 230V 50Hz	222272
40A	3NO	1NO+1NC	AC 230V 60Hz	NC1-4011 230V 60Hz	222273
40A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-4011 240V 50/60Hz	222274
40A	3NO	1NO+1NC	AC 240V 50Hz	NC1-4011 240V 50Hz	222275
40A	3NO	1NO+1NC	AC 240V 60Hz	NC1-4011 240V 60Hz	222276
40A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-4011 24V 50/60Hz	222277
40A	3NO	1NO+1NC	AC 24V 50Hz	NC1-4011 24V 50Hz	222278
40A	3NO	1NO+1NC	AC 24V 60Hz	NC1-4011 24V 60Hz	222279
40A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-4011 380V 50/60Hz	222283
40A	3NO	1NO+1NC	AC 380V 50Hz	NC1-4011 380V 50Hz	222284
40A	3NO	1NO+1NC	AC 380V 60Hz	NC1-4011 380V 60Hz	222285
40A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-4011 400V 50/60Hz	222286
40A	3NO	1NO+1NC	AC 400V 50Hz	NC1-4011 400V 50Hz	222287
40A	3NO	1NO+1NC	AC 400V 60Hz	NC1-4011 400V 60Hz	222288
40A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-4011 415V 50/60Hz	222289
40A	3NO	1NO+1NC	AC 415V 50Hz	NC1-4011 415V 50Hz	222290
40A	3NO	1NO+1NC	AC 415V 60Hz	NC1-4011 415V 60Hz	222291
40A	3NO	1NO+1NC	AC 440V 50/60Hz	NC1-4011 440V 50/60Hz	222295
40A	3NO	1NO+1NC	AC 440V 50Hz	NC1-4011 440V 50Hz	222296
40A	3NO	1NO+1NC	AC 440V 60Hz	NC1-4011 440V 60Hz	222297
40A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-4011N 110V 50/60Hz	222304
40A	3NO	1NO+1NC	AC 110V 50Hz	NC1-4011N 110V 50Hz	222305
40A	3NO	1NO+1NC	AC 110V 60Hz	NC1-4011N 110V 60Hz	222306
40A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-4011N 220V 50/60Hz	222310
40A	3NO	1NO+1NC	AC 220V 50Hz	NC1-4011N 220V 50Hz	222311
40A	3NO	1NO+1NC	AC 220V 60Hz	NC1-4011N 220V 60Hz	222312
40A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-4011N 230V 50/60Hz	222313
40A	3NO	1NO+1NC	AC 230V 50Hz	NC1-4011N 230V 50Hz	222314
40A	3NO	1NO+1NC	AC 230V 60Hz	NC1-4011N 230V 60Hz	222315
40A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-4011N 240V 50/60Hz	222316
40A	3NO	1NO+1NC	AC 240V 50Hz	NC1-4011N 240V 50Hz	222317
40A	3NO	1NO+1NC	AC 240V 60Hz	NC1-4011N 240V 60Hz	222318
40A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-4011N 24V 50/60Hz	222319
40A	3NO	1NO+1NC	AC 24V 50Hz	NC1-4011N 24V 50Hz	222320
40A	3NO	1NO+1NC	AC 24V 60Hz	NC1-4011N 24V 60Hz	222321
40A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-4011N 380V 50/60Hz	222325
40A	3NO	1NO+1NC	AC 380V 50Hz	NC1-4011N 380V 50Hz	222326
40A	3NO	1NO+1NC	AC 380V 60Hz	NC1-4011N 380V 60Hz	222327
40A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-4011N 400V 50/60Hz	222328
40A	3NO	1NO+1NC	AC 400V 50Hz	NC1-4011N 400V 50Hz	222329

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
40A	3NO	1NO+1NC	AC 400V 60Hz	NC1-4011N 400V 60Hz	222330
40A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-4011N 415V 50/60Hz	222331
40A	3NO	1NO+1NC	AC 415V 50Hz	NC1-4011N 415V 50Hz	222332
40A	3NO	1NO+1NC	AC 415V 60Hz	NC1-4011N 415V 60Hz	222333
40A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-4011N 120V 50/60Hz	226032
40A	3NO	1NO+1NC	DC 110V	NC1-4011Z 110V	222349
40A	3NO	1NO+1NC	DC 220V	NC1-4011Z 220V	222350
40A	3NO	1NO+1NC	DC 24V	NC1-4011Z 24V	222351
40A	3NO	1NO+1NC	DC 48V	NC1-4011Z 48V	222352
40A	4NO	-	AC 110V 50/60Hz	NC1-4004 110V 50/60Hz	222133
40A	4NO	-	AC 110V 50Hz	NC1-4004 110V 50Hz	222134
40A	4NO	-	AC 110V 60Hz	NC1-4004 110V 60Hz	222135
40A	4NO	-	AC 220V 50/60Hz	NC1-4004 220V 50/60Hz	222139
40A	4NO	-	AC 220V 50Hz	NC1-4004 220V 50Hz	222140
40A	4NO	-	AC 220V 60Hz	NC1-4004 220V 60Hz	222141
40A	4NO	-	AC 230V 50/60Hz	NC1-4004 230V 50/60Hz	222142
40A	4NO	-	AC 230V 50Hz	NC1-4004 230V 50Hz	222143
40A	4NO	-	AC 230V 60Hz	NC1-4004 230V 60Hz	222144
40A	4NO	-	AC 240V 50/60Hz	NC1-4004 240V 50/60Hz	222145
40A	4NO	-	AC 240V 50Hz	NC1-4004 240V 50Hz	222146
40A	4NO	-	AC 240V 60Hz	NC1-4004 240V 60Hz	222147
40A	4NO	-	AC 24V 50/60Hz	NC1-4004 24V 50/60Hz	222148
40A	4NO	-	AC 24V 50Hz	NC1-4004 24V 50Hz	222149
40A	4NO	-	AC 24V 60Hz	NC1-4004 24V 60Hz	222150
40A	4NO	-	AC 380V 50/60Hz	NC1-4004 380V 50/60Hz	222154
40A	4NO	-	AC 380V 50Hz	NC1-4004 380V 50Hz	222155
40A	4NO	-	AC 380V 60Hz	NC1-4004 380V 60Hz	222156
40A	4NO	-	AC 400V 50/60Hz	NC1-4004 400V 50/60Hz	222157
40A	4NO	-	AC 400V 50Hz	NC1-4004 400V 50Hz	222158
40A	4NO	-	AC 400V 60Hz	NC1-4004 400V 60Hz	222159
40A	4NO	-	AC 415V 50/60Hz	NC1-4004 415V 50/60Hz	222160
40A	4NO	-	AC 415V 50Hz	NC1-4004 415V 50Hz	222161
40A	4NO	-	AC 415V 60Hz	NC1-4004 415V 60Hz	222162
40A	4NO	-	AC 440V 50/60Hz	NC1-4004 440V 50/60Hz	222166
40A	4NO	-	AC 440V 50Hz	NC1-4004 440V 50Hz	222167
40A	4NO	-	AC 440V 60Hz	NC1-4004 440V 60Hz	222168
40A	4NO	-	AC 120V 60Hz	NC1-4004 120V 60Hz	225550
40A	4NO	-	AC 120V 50/60Hz	NC1-4004 120V 50/60Hz	225829
40A	4NO	-	AC 110V 50/60Hz	NC1-4004N 110V 50/60Hz	222175
40A	4NO	-	AC 110V 50Hz	NC1-4004N 110V 50Hz	222176
40A	4NO	-	AC 110V 60Hz	NC1-4004N 110V 60Hz	222177
40A	4NO	-	AC 220V 50/60Hz	NC1-4004N 220V 50/60Hz	222181
40A	4NO	-	AC 220V 50Hz	NC1-4004N 220V 50Hz	222182
40A	4NO	-	AC 220V 60Hz	NC1-4004N 220V 60Hz	222183
40A	4NO	-	AC 230V 50/60Hz	NC1-4004N 230V 50/60Hz	222184
40A	4NO	-	AC 230V 50Hz	NC1-4004N 230V 50Hz	222185
40A	4NO	-	AC 230V 60Hz	NC1-4004N 230V 60Hz	222186
40A	4NO	-	AC 240V 50/60Hz	NC1-4004N 240V 50/60Hz	222187
40A	4NO	-	AC 240V 50Hz	NC1-4004N 240V 50Hz	222188
40A	4NO	-	AC 240V 60Hz	NC1-4004N 240V 60Hz	222189

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
40A	4NO	-	AC 24V 50/60Hz	NC1-4004N 24V 50/60Hz	222190
40A	4NO	-	AC 24V 50Hz	NC1-4004N 24V 50Hz	222191
40A	4NO	-	AC 24V 60Hz	NC1-4004N 24V 60Hz	222192
40A	4NO	-	AC 380V 50/60Hz	NC1-4004N 380V 50/60Hz	222196
40A	4NO	-	AC 380V 50Hz	NC1-4004N 380V 50Hz	222197
40A	4NO	-	AC 380V 60Hz	NC1-4004N 380V 60Hz	222198
40A	4NO	-	AC 400V 50/60Hz	NC1-4004N 400V 50/60Hz	222199
40A	4NO	-	AC 400V 50Hz	NC1-4004N 400V 50Hz	222200
40A	4NO	-	AC 400V 60Hz	NC1-4004N 400V 60Hz	222201
40A	4NO	-	AC 415V 50/60Hz	NC1-4004N 415V 50/60Hz	222202
40A	4NO	-	AC 415V 50Hz	NC1-4004N 415V 50Hz	222203
40A	4NO	-	AC 415V 60Hz	NC1-4004N 415V 60Hz	222204
40A	4NO	-	DC 24V	NC1-4004Z 24V	225576
40A	4NO	-	DC 110V	NC1-4004Z 110V	225943
40A	4NO	-	DC 220V	NC1-4004Z 220V	225945
40A	4NO	-	DC 48V	NC1-4004Z 48V	226012
40A	2NO+2NC	-	AC 110V 50/60Hz	NC1-4008 110V 50/60Hz	222217
40A	2NO+2NC	-	AC 110V 50Hz	NC1-4008 110V 50Hz	222218
40A	2NO+2NC	-	AC 110V 60Hz	NC1-4008 110V 60Hz	222219
40A	2NO+2NC	-	AC 220V 50/60Hz	NC1-4008 220V 50/60Hz	222223
40A	2NO+2NC	-	AC 220V 50Hz	NC1-4008 220V 50Hz	222224
40A	2NO+2NC	-	AC 220V 60Hz	NC1-4008 220V 60Hz	222225
40A	2NO+2NC	-	AC 230V 50/60Hz	NC1-4008 230V 50/60Hz	222226
40A	2NO+2NC	-	AC 230V 50Hz	NC1-4008 230V 50Hz	222227
40A	2NO+2NC	-	AC 230V 60Hz	NC1-4008 230V 60Hz	222228
40A	2NO+2NC	-	AC 240V 50/60Hz	NC1-4008 240V 50/60Hz	222229
40A	2NO+2NC	-	AC 240V 50Hz	NC1-4008 240V 50Hz	222230
40A	2NO+2NC	-	AC 240V 60Hz	NC1-4008 240V 60Hz	222231
40A	2NO+2NC	-	AC 24V 50/60Hz	NC1-4008 24V 50/60Hz	222232
40A	2NO+2NC	-	AC 24V 50Hz	NC1-4008 24V 50Hz	222233
40A	2NO+2NC	-	AC 24V 60Hz	NC1-4008 24V 60Hz	222234
40A	2NO+2NC	-	AC 380V 50/60Hz	NC1-4008 380V 50/60Hz	222238
40A	2NO+2NC	-	AC 380V 50Hz	NC1-4008 380V 50Hz	222239
40A	2NO+2NC	-	AC 380V 60Hz	NC1-4008 380V 60Hz	222240
40A	2NO+2NC	-	AC 400V 50/60Hz	NC1-4008 400V 50/60Hz	222241
40A	2NO+2NC	-	AC 400V 50Hz	NC1-4008 400V 50Hz	222242
40A	2NO+2NC	-	AC 400V 60Hz	NC1-4008 400V 60Hz	222243
40A	2NO+2NC	-	AC 415V 50/60Hz	NC1-4008 415V 50/60Hz	222244
40A	2NO+2NC	-	AC 415V 50Hz	NC1-4008 415V 50Hz	222245
40A	2NO+2NC	-	AC 415V 60Hz	NC1-4008 415V 60Hz	222246
40A	2NO+2NC	-	AC 440V 50/60Hz	NC1-4008 440V 50/60Hz	222250
40A	2NO+2NC	-	AC 440V 50Hz	NC1-4008 440V 50Hz	222251
40A	2NO+2NC	-	AC 440V 60Hz	NC1-4008 440V 60Hz	222252
40A	2NO+2NC	-	AC 120V 60Hz	NC1-4008 120V 60Hz	225544
40A	2NO+2NC	-	AC 120V 50/60Hz	NC1-4008 120V 50/60Hz	225572
40A	2NO+2NC	-	DC 24V	NC1-4008Z 24V	225575
40A	2NO+2NC	-	DC 110V	NC1-4008Z 110V	225947
40A	2NO+2NC	-	DC 220V	NC1-4008Z 220V	225949

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
50A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-5011 110V 50/60Hz	222480
50A	3NO	1NO+1NC	AC 110V 50Hz	NC1-5011 110V 50Hz	222481
50A	3NO	1NO+1NC	AC 110V 60Hz	NC1-5011 110V 60Hz	222482
50A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-5011 120V 50/60Hz	222483
50A	3NO	1NO+1NC	AC 120V 50Hz	NC1-5011 120V 50Hz	222484
50A	3NO	1NO+1NC	AC 120V 60Hz	NC1-5011 120V 60Hz	222485
50A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-5011 220V 50/60Hz	222489
50A	3NO	1NO+1NC	AC 220V 50Hz	NC1-5011 220V 50Hz	222490
50A	3NO	1NO+1NC	AC 220V 60Hz	NC1-5011 220V 60Hz	222491
50A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-5011 230V 50/60Hz	222492
50A	3NO	1NO+1NC	AC 230V 50Hz	NC1-5011 230V 50Hz	222493
50A	3NO	1NO+1NC	AC 230V 60Hz	NC1-5011 230V 60Hz	222494
50A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-5011 240V 50/60Hz	222495
50A	3NO	1NO+1NC	AC 240V 50Hz	NC1-5011 240V 50Hz	222496
50A	3NO	1NO+1NC	AC 240V 60Hz	NC1-5011 240V 60Hz	222497
50A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-5011 24V 50/60Hz	222498
50A	3NO	1NO+1NC	AC 24V 50Hz	NC1-5011 24V 50Hz	222499
50A	3NO	1NO+1NC	AC 24V 60Hz	NC1-5011 24V 60Hz	222500
50A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-5011 380V 50/60Hz	222504
50A	3NO	1NO+1NC	AC 380V 50Hz	NC1-5011 380V 50Hz	222505
50A	3NO	1NO+1NC	AC 380V 60Hz	NC1-5011 380V 60Hz	222506
50A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-5011 400V 50/60Hz	222507
50A	3NO	1NO+1NC	AC 400V 50Hz	NC1-5011 400V 50Hz	222508
50A	3NO	1NO+1NC	AC 400V 60Hz	NC1-5011 400V 60Hz	222509
50A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-5011 415V 50/60Hz	222510
50A	3NO	1NO+1NC	AC 415V 50Hz	NC1-5011 415V 50Hz	222511
50A	3NO	1NO+1NC	AC 415V 60Hz	NC1-5011 415V 60Hz	222512
50A	3NO	1NO+1NC	AC 440V 50/60Hz	NC1-5011 440V 50/60Hz	222516
50A	3NO	1NO+1NC	AC 440V 50Hz	NC1-5011 440V 50Hz	222517
50A	3NO	1NO+1NC	AC 440V 60Hz	NC1-5011 440V 60Hz	222518
50A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-5011N 110V 50/60Hz	222525
50A	3NO	1NO+1NC	AC 110V 50Hz	NC1-5011N 110V 50Hz	222526
50A	3NO	1NO+1NC	AC 110V 60Hz	NC1-5011N 110V 60Hz	222527
50A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-5011N 220V 50/60Hz	222531
50A	3NO	1NO+1NC	AC 220V 50Hz	NC1-5011N 220V 50Hz	222532
50A	3NO	1NO+1NC	AC 220V 60Hz	NC1-5011N 220V 60Hz	222533
50A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-5011N 230V 50/60Hz	222534
50A	3NO	1NO+1NC	AC 230V 50Hz	NC1-5011N 230V 50Hz	222535
50A	3NO	1NO+1NC	AC 230V 60Hz	NC1-5011N 230V 60Hz	222536
50A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-5011N 240V 50/60Hz	222537
50A	3NO	1NO+1NC	AC 240V 50Hz	NC1-5011N 240V 50Hz	222538
50A	3NO	1NO+1NC	AC 240V 60Hz	NC1-5011N 240V 60Hz	222539
50A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-5011N 24V 50/60Hz	222540
50A	3NO	1NO+1NC	AC 24V 50Hz	NC1-5011N 24V 50Hz	222541
50A	3NO	1NO+1NC	AC 24V 60Hz	NC1-5011N 24V 60Hz	222542
50A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-5011N 380V 50/60Hz	222546
50A	3NO	1NO+1NC	AC 380V 50Hz	NC1-5011N 380V 50Hz	222547
50A	3NO	1NO+1NC	AC 380V 60Hz	NC1-5011N 380V 60Hz	222548
50A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-5011N 400V 50/60Hz	222549
50A	3NO	1NO+1NC	AC 400V 50Hz	NC1-5011N 400V 50Hz	222550

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
50A	3NO	1NO+1NC	AC 400V 60Hz	NC1-5011N 400V 60Hz	222551
50A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-5011N 415V 50/60Hz	222552
50A	3NO	1NO+1NC	AC 415V 50Hz	NC1-5011N 415V 50Hz	222553
50A	3NO	1NO+1NC	AC 415V 60Hz	NC1-5011N 415V 60Hz	222554
50A	3NO	1NO+1NC	AC 120V 60Hz	NC1-5011N 120V 60Hz	225539
50A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-5011N 120V 50/60Hz	226969
50A	3NO	1NO+1NC	DC 110V	NC1-5011Z 110V	222570
50A	3NO	1NO+1NC	DC 220V	NC1-5011Z 220V	222571
50A	3NO	1NO+1NC	DC 24V	NC1-5011Z 24V	222572
50A	3NO	1NO+1NC	DC 48V	NC1-5011Z 48V	222573
50A	4NO	-	AC 110V 50/60Hz	NC1-5004 110V 50/60Hz	222354
50A	4NO	-	AC 110V 50Hz	NC1-5004 110V 50Hz	222355
50A	4NO	-	AC 110V 60Hz	NC1-5004 110V 60Hz	222356
50A	4NO	-	AC 220V 50/60Hz	NC1-5004 220V 50/60Hz	222360
50A	4NO	-	AC 220V 50Hz	NC1-5004 220V 50Hz	222361
50A	4NO	-	AC 220V 60Hz	NC1-5004 220V 60Hz	222362
50A	4NO	-	AC 230V 50/60Hz	NC1-5004 230V 50/60Hz	222363
50A	4NO	-	AC 230V 50Hz	NC1-5004 230V 50Hz	222364
50A	4NO	-	AC 230V 60Hz	NC1-5004 230V 60Hz	222365
50A	4NO	-	AC 240V 50/60Hz	NC1-5004 240V 50/60Hz	222366
50A	4NO	-	AC 240V 50Hz	NC1-5004 240V 50Hz	222367
50A	4NO	-	AC 240V 60Hz	NC1-5004 240V 60Hz	222368
50A	4NO	-	AC 24V 50/60Hz	NC1-5004 24V 50/60Hz	222369
50A	4NO	-	AC 24V 50Hz	NC1-5004 24V 50Hz	222370
50A	4NO	-	AC 24V 60Hz	NC1-5004 24V 60Hz	222371
50A	4NO	-	AC 380V 50/60Hz	NC1-5004 380V 50/60Hz	222375
50A	4NO	-	AC 380V 50Hz	NC1-5004 380V 50Hz	222376
50A	4NO	-	AC 380V 60Hz	NC1-5004 380V 60Hz	222377
50A	4NO	-	AC 400V 50/60Hz	NC1-5004 400V 50/60Hz	222378
50A	4NO	-	AC 400V 50Hz	NC1-5004 400V 50Hz	222379
50A	4NO	-	AC 400V 60Hz	NC1-5004 400V 60Hz	222380
50A	4NO	-	AC 415V 50/60Hz	NC1-5004 415V 50/60Hz	222381
50A	4NO	-	AC 415V 50Hz	NC1-5004 415V 50Hz	222382
50A	4NO	-	AC 415V 60Hz	NC1-5004 415V 60Hz	222383
50A	4NO	-	AC 440V 50/60Hz	NC1-5004 440V 50/60Hz	222387
50A	4NO	-	AC 440V 50Hz	NC1-5004 440V 50Hz	222388
50A	4NO	-	AC 440V 60Hz	NC1-5004 440V 60Hz	222389
50A	4NO	-	AC 120V 60Hz	NC1-5004 120V 60Hz	225551
50A	4NO	-	AC 120V 50/60Hz	NC1-5004 120V 50/60Hz	226573
50A	4NO	-	AC 110V 50/60Hz	NC1-5004N 110V 50/60Hz	222396
50A	4NO	-	AC 110V 50Hz	NC1-5004N 110V 50Hz	222397
50A	4NO	-	AC 110V 60Hz	NC1-5004N 110V 60Hz	222398
50A	4NO	-	AC 220V 50/60Hz	NC1-5004N 220V 50/60Hz	222402
50A	4NO	-	AC 220V 50Hz	NC1-5004N 220V 50Hz	222403
50A	4NO	-	AC 220V 60Hz	NC1-5004N 220V 60Hz	222404
50A	4NO	-	AC 230V 50/60Hz	NC1-5004N 230V 50/60Hz	222405
50A	4NO	-	AC 230V 50Hz	NC1-5004N 230V 50Hz	222406
50A	4NO	-	AC 230V 60Hz	NC1-5004N 230V 60Hz	222407
50A	4NO	-	AC 240V 50/60Hz	NC1-5004N 240V 50/60Hz	222408
50A	4NO	-	AC 240V 50Hz	NC1-5004N 240V 50Hz	222409

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
50A	4NO	-	AC 240V 60Hz	NC1-5004N 240V 60Hz	222410
50A	4NO	-	AC 24V 50/60Hz	NC1-5004N 24V 50/60Hz	222411
50A	4NO	-	AC 24V 50Hz	NC1-5004N 24V 50Hz	222412
50A	4NO	-	AC 24V 60Hz	NC1-5004N 24V 60Hz	222413
50A	4NO	-	AC 380V 50/60Hz	NC1-5004N 380V 50/60Hz	222417
50A	4NO	-	AC 380V 50Hz	NC1-5004N 380V 50Hz	222418
50A	4NO	-	AC 380V 60Hz	NC1-5004N 380V 60Hz	222419
50A	4NO	-	AC 400V 50/60Hz	NC1-5004N 400V 50/60Hz	222420
50A	4NO	-	AC 400V 50Hz	NC1-5004N 400V 50Hz	222421
50A	4NO	-	AC 400V 60Hz	NC1-5004N 400V 60Hz	222422
50A	4NO	-	AC 415V 50/60Hz	NC1-5004N 415V 50/60Hz	222423
50A	4NO	-	AC 415V 50Hz	NC1-5004N 415V 50Hz	222424
50A	4NO	-	AC 415V 60Hz	NC1-5004N 415V 60Hz	222425
50A	4NO	-	DC 24V	NC1-5004Z 24V	225578
50A	4NO	-	DC 110V	NC1-5004Z 110V	225951
50A	4NO	-	DC 220V	NC1-5004Z 220V	225953
50A	4NO	-	DC 48V	NC1-5004Z 48V	226019
50A	2NO+2NC	-	AC 110V 50/60Hz	NC1-5008 110V 50/60Hz	222438
50A	2NO+2NC	-	AC 110V 50Hz	NC1-5008 110V 50Hz	222439
50A	2NO+2NC	-	AC 110V 60Hz	NC1-5008 110V 60Hz	222440
50A	2NO+2NC	-	AC 220V 50/60Hz	NC1-5008 220V 50/60Hz	222444
50A	2NO+2NC	-	AC 220V 50Hz	NC1-5008 220V 50Hz	222445
50A	2NO+2NC	-	AC 220V 60Hz	NC1-5008 220V 60Hz	222446
50A	2NO+2NC	-	AC 230V 50/60Hz	NC1-5008 230V 50/60Hz	222447
50A	2NO+2NC	-	AC 230V 50Hz	NC1-5008 230V 50Hz	222448
50A	2NO+2NC	-	AC 230V 60Hz	NC1-5008 230V 60Hz	222449
50A	2NO+2NC	-	AC 240V 50/60Hz	NC1-5008 240V 50/60Hz	222450
50A	2NO+2NC	-	AC 240V 50Hz	NC1-5008 240V 50Hz	222451
50A	2NO+2NC	-	AC 240V 60Hz	NC1-5008 240V 60Hz	222452
50A	2NO+2NC	-	AC 24V 50/60Hz	NC1-5008 24V 50/60Hz	222453
50A	2NO+2NC	-	AC 24V 50Hz	NC1-5008 24V 50Hz	222454
50A	2NO+2NC	-	AC 24V 60Hz	NC1-5008 24V 60Hz	222455
50A	2NO+2NC	-	AC 380V 50/60Hz	NC1-5008 380V 50/60Hz	222459
50A	2NO+2NC	-	AC 380V 50Hz	NC1-5008 380V 50Hz	222460
50A	2NO+2NC	-	AC 380V 60Hz	NC1-5008 380V 60Hz	222461
50A	2NO+2NC	-	AC 400V 50/60Hz	NC1-5008 400V 50/60Hz	222462
50A	2NO+2NC	-	AC 400V 50Hz	NC1-5008 400V 50Hz	222463
50A	2NO+2NC	-	AC 400V 60Hz	NC1-5008 400V 60Hz	222464
50A	2NO+2NC	-	AC 415V 50/60Hz	NC1-5008 415V 50/60Hz	222465
50A	2NO+2NC	-	AC 415V 50Hz	NC1-5008 415V 50Hz	222466
50A	2NO+2NC	-	AC 415V 60Hz	NC1-5008 415V 60Hz	222467
50A	2NO+2NC	-	AC 440V 50/60Hz	NC1-5008 440V 50/60Hz	222471
50A	2NO+2NC	-	AC 440V 50Hz	NC1-5008 440V 50Hz	222472
50A	2NO+2NC	-	AC 440V 60Hz	NC1-5008 440V 60Hz	222473
50A	2NO+2NC	-	AC 120V 50/60Hz	NC1-5008 120V 50/60Hz	225573
50A	2NO+2NC	-	AC 120V 60Hz	NC1-5008 120V 60Hz	225837
50A	2NO+2NC	-	DC 24V	NC1-5008Z 24V	225577
50A	2NO+2NC	-	DC 110V	NC1-5008Z 110V	225955
50A	2NO+2NC	-	DC 220V	NC1-5008Z 220V	225957

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
65A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-6511 110V 50/60Hz	222701
65A	3NO	1NO+1NC	AC 110V 50Hz	NC1-6511 110V 50Hz	222702
65A	3NO	1NO+1NC	AC 110V 60Hz	NC1-6511 110V 60Hz	222703
65A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-6511 120V 50/60Hz	222704
65A	3NO	1NO+1NC	AC 120V 50Hz	NC1-6511 120V 50Hz	222705
65A	3NO	1NO+1NC	AC 120V 60Hz	NC1-6511 120V 60Hz	222706
65A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-6511 220V 50/60Hz	222710
65A	3NO	1NO+1NC	AC 220V 50Hz	NC1-6511 220V 50Hz	222711
65A	3NO	1NO+1NC	AC 220V 60Hz	NC1-6511 220V 60Hz	222712
65A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-6511 230V 50/60Hz	222713
65A	3NO	1NO+1NC	AC 230V 50Hz	NC1-6511 230V 50Hz	222714
65A	3NO	1NO+1NC	AC 230V 60Hz	NC1-6511 230V 60Hz	222715
65A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-6511 240V 50/60Hz	222716
65A	3NO	1NO+1NC	AC 240V 50Hz	NC1-6511 240V 50Hz	222717
65A	3NO	1NO+1NC	AC 240V 60Hz	NC1-6511 240V 60Hz	222718
65A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-6511 24V 50/60Hz	222719
65A	3NO	1NO+1NC	AC 24V 50Hz	NC1-6511 24V 50Hz	222720
65A	3NO	1NO+1NC	AC 24V 60Hz	NC1-6511 24V 60Hz	222721
65A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-6511 380V 50/60Hz	222725
65A	3NO	1NO+1NC	AC 380V 50Hz	NC1-6511 380V 50Hz	222726
65A	3NO	1NO+1NC	AC 380V 60Hz	NC1-6511 380V 60Hz	222727
65A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-6511 400V 50/60Hz	222728
65A	3NO	1NO+1NC	AC 400V 50Hz	NC1-6511 400V 50Hz	222729
65A	3NO	1NO+1NC	AC 400V 60Hz	NC1-6511 400V 60Hz	222730
65A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-6511 415V 50/60Hz	222731
65A	3NO	1NO+1NC	AC 415V 50Hz	NC1-6511 415V 50Hz	222732
65A	3NO	1NO+1NC	AC 415V 60Hz	NC1-6511 415V 60Hz	222733
65A	3NO	1NO+1NC	AC 440V 50/60Hz	NC1-6511 440V 50/60Hz	222737
65A	3NO	1NO+1NC	AC 440V 50Hz	NC1-6511 440V 50Hz	222738
65A	3NO	1NO+1NC	AC 440V 60Hz	NC1-6511 440V 60Hz	222739
65A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-6511 110V 50/60Hz(korea)	226584
65A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-6511 220V 50/60Hz(korea)	226585
65A	3NO	1NO+1NC	AC 380V 50/60Hz (korea)	NC1-6511 380V 50/60Hz (korea)	226586
65A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-6511N 110V 50/60Hz	222746
65A	3NO	1NO+1NC	AC 110V 50Hz	NC1-6511N 110V 50Hz	222747
65A	3NO	1NO+1NC	AC 110V 60Hz	NC1-6511N 110V 60Hz	222748
65A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-6511N 220V 50/60Hz	222752
65A	3NO	1NO+1NC	AC 220V 50Hz	NC1-6511N 220V 50Hz	222753
65A	3NO	1NO+1NC	AC 220V 60Hz	NC1-6511N 220V 60Hz	222754
65A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-6511N 230V 50/60Hz	222755
65A	3NO	1NO+1NC	AC 230V 50Hz	NC1-6511N 230V 50Hz	222756
65A	3NO	1NO+1NC	AC 230V 60Hz	NC1-6511N 230V 60Hz	222757
65A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-6511N 240V 50/60Hz	222758
65A	3NO	1NO+1NC	AC 240V 50Hz	NC1-6511N 240V 50Hz	222759
65A	3NO	1NO+1NC	AC 240V 60Hz	NC1-6511N 240V 60Hz	222760
65A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-6511N 24V 50/60Hz	222761
65A	3NO	1NO+1NC	AC 24V 50Hz	NC1-6511N 24V 50Hz	222762
65A	3NO	1NO+1NC	AC 24V 60Hz	NC1-6511N 24V 60Hz	222763
65A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-6511N 380V 50/60Hz	222767
65A	3NO	1NO+1NC	AC 380V 50Hz	NC1-6511N 380V 50Hz	222768

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
65A	3NO	1NO+1NC	AC 380V 60Hz	NC1-6511N 380V 60Hz	222769
65A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-6511N 400V 50/60Hz	222770
65A	3NO	1NO+1NC	AC 400V 50Hz	NC1-6511N 400V 50Hz	222771
65A	3NO	1NO+1NC	AC 400V 60Hz	NC1-6511N 400V 60Hz	222772
65A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-6511N 415V 50/60Hz	222773
65A	3NO	1NO+1NC	AC 415V 50Hz	NC1-6511N 415V 50Hz	222774
65A	3NO	1NO+1NC	AC 415V 60Hz	NC1-6511N 415V 60Hz	222775
65A	3NO	1NO+1NC	AC 120V 60Hz	NC1-6511N 120V 60Hz	225853
65A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-6511N 120V 50/60Hz	226970
65A	3NO	1NO+1NC	DC 110V	NC1-6511Z 110V	222791
65A	3NO	1NO+1NC	DC 220V	NC1-6511Z 220V	222792
65A	3NO	1NO+1NC	DC 24V	NC1-6511Z 24V	222793
65A	3NO	1NO+1NC	DC 48V	NC1-6511Z 48V	222794
65A	4NO	-	AC 110V 50/60Hz	NC1-6504 110V 50/60Hz	222575
65A	4NO	-	AC 110V 50Hz	NC1-6504 110V 50Hz	222576
65A	4NO	-	AC 110V 60Hz	NC1-6504 110V 60Hz	222577
65A	4NO	-	AC 220V 50/60Hz	NC1-6504 220V 50/60Hz	222581
65A	4NO	-	AC 220V 50Hz	NC1-6504 220V 50Hz	222582
65A	4NO	-	AC 220V 60Hz	NC1-6504 220V 60Hz	222583
65A	4NO	-	AC 230V 50/60Hz	NC1-6504 230V 50/60Hz	222584
65A	4NO	-	AC 230V 50Hz	NC1-6504 230V 50Hz	222585
65A	4NO	-	AC 230V 60Hz	NC1-6504 230V 60Hz	222586
65A	4NO	-	AC 240V 50/60Hz	NC1-6504 240V 50/60Hz	222587
65A	4NO	-	AC 240V 50Hz	NC1-6504 240V 50Hz	222588
65A	4NO	-	AC 240V 60Hz	NC1-6504 240V 60Hz	222589
65A	4NO	-	AC 24V 50/60Hz	NC1-6504 24V 50/60Hz	222590
65A	4NO	-	AC 24V 50Hz	NC1-6504 24V 50Hz	222591
65A	4NO	-	AC 24V 60Hz	NC1-6504 24V 60Hz	222592
65A	4NO	-	AC 380V 50/60Hz	NC1-6504 380V 50/60Hz	222596
65A	4NO	-	AC 380V 50Hz	NC1-6504 380V 50Hz	222597
65A	4NO	-	AC 380V 60Hz	NC1-6504 380V 60Hz	222598
65A	4NO	-	AC 400V 50/60Hz	NC1-6504 400V 50/60Hz	222599
65A	4NO	-	AC 400V 50Hz	NC1-6504 400V 50Hz	222600
65A	4NO	-	AC 400V 60Hz	NC1-6504 400V 60Hz	222601
65A	4NO	-	AC 415V 50/60Hz	NC1-6504 415V 50/60Hz	222602
65A	4NO	-	AC 415V 50Hz	NC1-6504 415V 50Hz	222603
65A	4NO	-	AC 415V 60Hz	NC1-6504 415V 60Hz	222604
65A	4NO	-	AC 440V 50/60Hz	NC1-6504 440V 50/60Hz	222608
65A	4NO	-	AC 440V 50Hz	NC1-6504 440V 50Hz	222609
65A	4NO	-	AC 440V 60Hz	NC1-6504 440V 60Hz	222610
65A	4NO	-	AC 120V 60Hz	NC1-6504 120V 60Hz	225529
65A	4NO	-	AC 120V 50/60Hz	NC1-6504 120V 50/60Hz	225834
65A	4NO	-	AC 110V 50/60Hz	NC1-6504N 110V 50/60Hz	222617
65A	4NO	-	AC 110V 50Hz	NC1-6504N 110V 50Hz	222618
65A	4NO	-	AC 110V 60Hz	NC1-6504N 110V 60Hz	222619
65A	4NO	-	AC 220V 50/60Hz	NC1-6504N 220V 50/60Hz	222623
65A	4NO	-	AC 220V 50Hz	NC1-6504N 220V 50Hz	222624
65A	4NO	-	AC 220V 60Hz	NC1-6504N 220V 60Hz	222625
65A	4NO	-	AC 230V 50/60Hz	NC1-6504N 230V 50/60Hz	222626
65A	4NO	-	AC 230V 50Hz	NC1-6504N 230V 50Hz	222627

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
65A	4NO	-	AC 230V 60Hz	NC1-6504N 230V 60Hz	222628
65A	4NO	-	AC 240V 50/60Hz	NC1-6504N 240V 50/60Hz	222629
65A	4NO	-	AC 240V 50Hz	NC1-6504N 240V 50Hz	222630
65A	4NO	-	AC 240V 60Hz	NC1-6504N 240V 60Hz	222631
65A	4NO	-	AC 24V 50/60Hz	NC1-6504N 24V 50/60Hz	222632
65A	4NO	-	AC 24V 50Hz	NC1-6504N 24V 50Hz	222633
65A	4NO	-	AC 24V 60Hz	NC1-6504N 24V 60Hz	222634
65A	4NO	-	AC 380V 50/60Hz	NC1-6504N 380V 50/60Hz	222638
65A	4NO	-	AC 380V 50Hz	NC1-6504N 380V 50Hz	222639
65A	4NO	-	AC 380V 60Hz	NC1-6504N 380V 60Hz	222640
65A	4NO	-	AC 400V 50/60Hz	NC1-6504N 400V 50/60Hz	222641
65A	4NO	-	AC 400V 50Hz	NC1-6504N 400V 50Hz	222642
65A	4NO	-	AC 400V 60Hz	NC1-6504N 400V 60Hz	222643
65A	4NO	-	AC 415V 50/60Hz	NC1-6504N 415V 50/60Hz	222644
65A	4NO	-	AC 415V 50Hz	NC1-6504N 415V 50Hz	222645
65A	4NO	-	AC 415V 60Hz	NC1-6504N 415V 60Hz	222646
65A	4NO	-	DC 24V	NC1-6504Z 24V	225844
65A	4NO	-	DC 110V	NC1-6504Z 110V	225960
65A	4NO	-	DC 220V	NC1-6504Z 220V	225962
65A	4NO	-	DC 48V	NC1-6504Z 48V	226020
65A	2NO+2NC	-	AC 110V 50/60Hz	NC1-6508 110V 50/60Hz	222659
65A	2NO+2NC	-	AC 110V 50Hz	NC1-6508 110V 50Hz	222660
65A	2NO+2NC	-	AC 110V 60Hz	NC1-6508 110V 60Hz	222661
65A	2NO+2NC	-	AC 220V 50/60Hz	NC1-6508 220V 50/60Hz	222665
65A	2NO+2NC	-	AC 220V 50Hz	NC1-6508 220V 50Hz	222666
65A	2NO+2NC	-	AC 220V 60Hz	NC1-6508 220V 60Hz	222667
65A	2NO+2NC	-	AC 230V 50/60Hz	NC1-6508 230V 50/60Hz	222668
65A	2NO+2NC	-	AC 230V 50Hz	NC1-6508 230V 50Hz	222669
65A	2NO+2NC	-	AC 230V 60Hz	NC1-6508 230V 60Hz	222670
65A	2NO+2NC	-	AC 240V 50/60Hz	NC1-6508 240V 50/60Hz	222671
65A	2NO+2NC	-	AC 240V 50Hz	NC1-6508 240V 50Hz	222672
65A	2NO+2NC	-	AC 240V 60Hz	NC1-6508 240V 60Hz	222673
65A	2NO+2NC	-	AC 24V 50/60Hz	NC1-6508 24V 50/60Hz	222674
65A	2NO+2NC	-	AC 24V 50Hz	NC1-6508 24V 50Hz	222675
65A	2NO+2NC	-	AC 24V 60Hz	NC1-6508 24V 60Hz	222676
65A	2NO+2NC	-	AC 380V 50/60Hz	NC1-6508 380V 50/60Hz	222680
65A	2NO+2NC	-	AC 380V 50Hz	NC1-6508 380V 50Hz	222681
65A	2NO+2NC	-	AC 380V 60Hz	NC1-6508 380V 60Hz	222682
65A	2NO+2NC	-	AC 400V 50/60Hz	NC1-6508 400V 50/60Hz	222683
65A	2NO+2NC	-	AC 400V 50Hz	NC1-6508 400V 50Hz	222684
65A	2NO+2NC	-	AC 400V 60Hz	NC1-6508 400V 60Hz	222685
65A	2NO+2NC	-	AC 415V 50/60Hz	NC1-6508 415V 50/60Hz	222686
65A	2NO+2NC	-	AC 415V 50Hz	NC1-6508 415V 50Hz	222687
65A	2NO+2NC	-	AC 415V 60Hz	NC1-6508 415V 60Hz	222688
65A	2NO+2NC	-	AC 440V 50/60Hz	NC1-6508 440V 50/60Hz	222692
65A	2NO+2NC	-	AC 440V 50Hz	NC1-6508 440V 50Hz	222693
65A	2NO+2NC	-	AC 440V 60Hz	NC1-6508 440V 60Hz	222694
65A	2NO+2NC	-	AC 120V 60Hz	NC1-6508 120V 60Hz	225530
65A	2NO+2NC	-	AC 120V 50/60Hz	NC1-6508 120V 50/60Hz	225835
65A	2NO+2NC	-	DC 110V	NC1-6508Z 110V	225964
65A	2NO+2NC	-	DC 220V	NC1-6508Z 220V	225966
65A	2NO+2NC	-	DC 24V	NC1-6508Z 24V	226966

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
80A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-8011 110V 50/60Hz	222922
80A	3NO	1NO+1NC	AC 110V 50Hz	NC1-8011 110V 50Hz	222923
80A	3NO	1NO+1NC	AC 110V 60Hz	NC1-8011 110V 60Hz	222924
80A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-8011 120V 50/60Hz	222925
80A	3NO	1NO+1NC	AC 120V 50Hz	NC1-8011 120V 50Hz	222926
80A	3NO	1NO+1NC	AC 120V 60Hz	NC1-8011 120V 60Hz	222927
80A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-8011 220V 50/60Hz	222931
80A	3NO	1NO+1NC	AC 220V 50Hz	NC1-8011 220V 50Hz	222932
80A	3NO	1NO+1NC	AC 220V 60Hz	NC1-8011 220V 60Hz	222933
80A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-8011 230V 50/60Hz	222934
80A	3NO	1NO+1NC	AC 230V 50Hz	NC1-8011 230V 50Hz	222935
80A	3NO	1NO+1NC	AC 230V 60Hz	NC1-8011 230V 60Hz	222936
80A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-8011 240V 50/60Hz	222937
80A	3NO	1NO+1NC	AC 240V 50Hz	NC1-8011 240V 50Hz	222938
80A	3NO	1NO+1NC	AC 240V 60Hz	NC1-8011 240V 60Hz	222939
80A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-8011 24V 50/60Hz	222940
80A	3NO	1NO+1NC	AC 24V 50Hz	NC1-8011 24V 50Hz	222941
80A	3NO	1NO+1NC	AC 24V 60Hz	NC1-8011 24V 60Hz	222942
80A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-8011 380V 50/60Hz	222946
80A	3NO	1NO+1NC	AC 380V 50Hz	NC1-8011 380V 50Hz	222947
80A	3NO	1NO+1NC	AC 380V 60Hz	NC1-8011 380V 60Hz	222948
80A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-8011 400V 50/60Hz	222949
80A	3NO	1NO+1NC	AC 400V 50Hz	NC1-8011 400V 50Hz	222950
80A	3NO	1NO+1NC	AC 400V 60Hz	NC1-8011 400V 60Hz	222951
80A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-8011 415V 50/60Hz	222952
80A	3NO	1NO+1NC	AC 415V 50Hz	NC1-8011 415V 50Hz	222953
80A	3NO	1NO+1NC	AC 415V 60Hz	NC1-8011 415V 60Hz	222954
80A	3NO	1NO+1NC	AC 440V 50/60Hz	NC1-8011 440V 50/60Hz	222958
80A	3NO	1NO+1NC	AC 440V 50Hz	NC1-8011 440V 50Hz	222959
80A	3NO	1NO+1NC	AC 440V 60Hz	NC1-8011 440V 60Hz	222960
80A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-8011 110V 50/60Hz(korea)	226587
80A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-8011 220V 50/60Hz(korea)	226588
80A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-8011 380V 50/60Hz(korea)	226589
80A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-8011N 110V 50/60Hz	222967
80A	3NO	1NO+1NC	AC 110V 50Hz	NC1-8011N 110V 50Hz	222968
80A	3NO	1NO+1NC	AC 110V 60Hz	NC1-8011N 110V 60Hz	222969
80A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-8011N 220V 50/60Hz	222973
80A	3NO	1NO+1NC	AC 220V 50Hz	NC1-8011N 220V 50Hz	222974
80A	3NO	1NO+1NC	AC 220V 60Hz	NC1-8011N 220V 60Hz	222975
80A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-8011N 230V 50/60Hz	222976
80A	3NO	1NO+1NC	AC 230V 50Hz	NC1-8011N 230V 50Hz	222977
80A	3NO	1NO+1NC	AC 230V 60Hz	NC1-8011N 230V 60Hz	222978
80A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-8011N 240V 50/60Hz	222979
80A	3NO	1NO+1NC	AC 240V 50Hz	NC1-8011N 240V 50Hz	222980
80A	3NO	1NO+1NC	AC 240V 60Hz	NC1-8011N 240V 60Hz	222981
80A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-8011N 24V 50/60Hz	222982
80A	3NO	1NO+1NC	AC 24V 50Hz	NC1-8011N 24V 50Hz	222983
80A	3NO	1NO+1NC	AC 24V 60Hz	NC1-8011N 24V 60Hz	222984
80A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-8011N 380V 50/60Hz	222988
80A	3NO	1NO+1NC	AC 380V 50Hz	NC1-8011N 380V 50Hz	222989

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
80A	3NO	1NO+1NC	AC 380V 60Hz	NC1-8011N 380V 60Hz	222990
80A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-8011N 400V 50/60Hz	222991
80A	3NO	1NO+1NC	AC 400V 50Hz	NC1-8011N 400V 50Hz	222992
80A	3NO	1NO+1NC	AC 400V 60Hz	NC1-8011N 400V 60Hz	222993
80A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-8011N 415V 50/60Hz	222994
80A	3NO	1NO+1NC	AC 415V 50Hz	NC1-8011N 415V 50Hz	222995
80A	3NO	1NO+1NC	AC 415V 60Hz	NC1-8011N 415V 60Hz	222996
80A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-8011N 120V 50/60Hz	226033
80A	3NO	1NO+1NC	DC 110V	NC1-8011Z 110V	223012
80A	3NO	1NO+1NC	DC 220V	NC1-8011Z 220V	223013
80A	3NO	1NO+1NC	DC 24V	NC1-8011Z 24V	223014
80A	3NO	1NO+1NC	DC 48V	NC1-8011Z 48V	223015
80A	4NO	-	AC 110V 50/60Hz	NC1-8004 110V 50/60Hz	222796
80A	4NO	-	AC 110V 50Hz	NC1-8004 110V 50Hz	222797
80A	4NO	-	AC 110V 60Hz	NC1-8004 110V 60Hz	222798
80A	4NO	-	AC 220V 50/60Hz	NC1-8004 220V 50/60Hz	222802
80A	4NO	-	AC 220V 50Hz	NC1-8004 220V 50Hz	222803
80A	4NO	-	AC 220V 60Hz	NC1-8004 220V 60Hz	222804
80A	4NO	-	AC 230V 50/60Hz	NC1-8004 230V 50/60Hz	222805
80A	4NO	-	AC 230V 50Hz	NC1-8004 230V 50Hz	222806
80A	4NO	-	AC 230V 60Hz	NC1-8004 230V 60Hz	222807
80A	4NO	-	AC 240V 50/60Hz	NC1-8004 240V 50/60Hz	222808
80A	4NO	-	AC 240V 50Hz	NC1-8004 240V 50Hz	222809
80A	4NO	-	AC 240V 60Hz	NC1-8004 240V 60Hz	222810
80A	4NO	-	AC 24V 50/60Hz	NC1-8004 24V 50/60Hz	222811
80A	4NO	-	AC 24V 50Hz	NC1-8004 24V 50Hz	222812
80A	4NO	-	AC 24V 60Hz	NC1-8004 24V 60Hz	222813
80A	4NO	-	AC 380V 50/60Hz	NC1-8004 380V 50/60Hz	222817
80A	4NO	-	AC 380V 50Hz	NC1-8004 380V 50Hz	222818
80A	4NO	-	AC 380V 60Hz	NC1-8004 380V 60Hz	222819
80A	4NO	-	AC 400V 50/60Hz	NC1-8004 400V 50/60Hz	222820
80A	4NO	-	AC 400V 50Hz	NC1-8004 400V 50Hz	222821
80A	4NO	-	AC 400V 60Hz	NC1-8004 400V 60Hz	222822
80A	4NO	-	AC 415V 50/60Hz	NC1-8004 415V 50/60Hz	222823
80A	4NO	-	AC 415V 50Hz	NC1-8004 415V 50Hz	222824
80A	4NO	-	AC 415V 60Hz	NC1-8004 415V 60Hz	222825
80A	4NO	-	AC 440V 50/60Hz	NC1-8004 440V 50/60Hz	222829
80A	4NO	-	AC 440V 50Hz	NC1-8004 440V 50Hz	222830
80A	4NO	-	AC 440V 60Hz	NC1-8004 440V 60Hz	222831
80A	4NO	-	AC 120V 50/60Hz	NC1-8004 120V 50/60Hz	226578
80A	4NO	-	AC 110V 50/60Hz	NC1-8004N 110V 50/60Hz	222838
80A	4NO	-	AC 110V 50Hz	NC1-8004N 110V 50Hz	222839
80A	4NO	-	AC 110V 60Hz	NC1-8004N 110V 60Hz	222840
80A	4NO	-	AC 220V 50/60Hz	NC1-8004N 220V 50/60Hz	222844
80A	4NO	-	AC 220V 50Hz	NC1-8004N 220V 50Hz	222845
80A	4NO	-	AC 220V 60Hz	NC1-8004N 220V 60Hz	222846
80A	4NO	-	AC 230V 50/60Hz	NC1-8004N 230V 50/60Hz	222847
80A	4NO	-	AC 230V 50Hz	NC1-8004N 230V 50Hz	222848
80A	4NO	-	AC 230V 60Hz	NC1-8004N 230V 60Hz	222849
80A	4NO	-	AC 240V 50/60Hz	NC1-8004N 240V 50/60Hz	222850

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
80A	4NO	-	AC 240V 50Hz	NC1-8004N 240V 50Hz	222851
80A	4NO	-	AC 240V 60Hz	NC1-8004N 240V 60Hz	222852
80A	4NO	-	AC 24V 50/60Hz	NC1-8004N 24V 50/60Hz	222853
80A	4NO	-	AC 24V 50Hz	NC1-8004N 24V 50Hz	222854
80A	4NO	-	AC 24V 60Hz	NC1-8004N 24V 60Hz	222855
80A	4NO	-	AC 380V 50/60Hz	NC1-8004N 380V 50/60Hz	222859
80A	4NO	-	AC 380V 50Hz	NC1-8004N 380V 50Hz	222860
80A	4NO	-	AC 380V 60Hz	NC1-8004N 380V 60Hz	222861
80A	4NO	-	AC 400V 50/60Hz	NC1-8004N 400V 50/60Hz	222862
80A	4NO	-	AC 400V 50Hz	NC1-8004N 400V 50Hz	222863
80A	4NO	-	AC 400V 60Hz	NC1-8004N 400V 60Hz	222864
80A	4NO	-	AC 415V 50/60Hz	NC1-8004N 415V 50/60Hz	222865
80A	4NO	-	AC 415V 50Hz	NC1-8004N 415V 50Hz	222866
80A	4NO	-	AC 415V 60Hz	NC1-8004N 415V 60Hz	222867
80A	4NO	-	DC 24V	NC1-8004Z 24V	225579
80A	4NO	-	DC 110V	NC1-8004Z 110V	225969
80A	4NO	-	DC 220V	NC1-8004Z 220V	225971
80A	4NO	-	DC 48V	NC1-8004Z 48V	226021
80A	2NO+2NC	-	AC 110V 50/60Hz	NC1-8008 110V 50/60Hz	222880
80A	2NO+2NC	-	AC 110V 50Hz	NC1-8008 110V 50Hz	222881
80A	2NO+2NC	-	AC 110V 60Hz	NC1-8008 110V 60Hz	222882
80A	2NO+2NC	-	AC 220V 50/60Hz	NC1-8008 220V 50/60Hz	222886
80A	2NO+2NC	-	AC 220V 50Hz	NC1-8008 220V 50Hz	222887
80A	2NO+2NC	-	AC 220V 60Hz	NC1-8008 220V 60Hz	222888
80A	2NO+2NC	-	AC 230V 50/60Hz	NC1-8008 230V 50/60Hz	222889
80A	2NO+2NC	-	AC 230V 50Hz	NC1-8008 230V 50Hz	222890
80A	2NO+2NC	-	AC 230V 60Hz	NC1-8008 230V 60Hz	222891
80A	2NO+2NC	-	AC 240V 50/60Hz	NC1-8008 240V 50/60Hz	222892
80A	2NO+2NC	-	AC 240V 50Hz	NC1-8008 240V 50Hz	222893
80A	2NO+2NC	-	AC 240V 60Hz	NC1-8008 240V 60Hz	222894
80A	2NO+2NC	-	AC 24V 50/60Hz	NC1-8008 24V 50/60Hz	222895
80A	2NO+2NC	-	AC 24V 50Hz	NC1-8008 24V 50Hz	222896
80A	2NO+2NC	-	AC 24V 60Hz	NC1-8008 24V 60Hz	222897
80A	2NO+2NC	-	AC 380V 50/60Hz	NC1-8008 380V 50/60Hz	222901
80A	2NO+2NC	-	AC 380V 50Hz	NC1-8008 380V 50Hz	222902
80A	2NO+2NC	-	AC 380V 60Hz	NC1-8008 380V 60Hz	222903
80A	2NO+2NC	-	AC 400V 50/60Hz	NC1-8008 400V 50/60Hz	222904
80A	2NO+2NC	-	AC 400V 50Hz	NC1-8008 400V 50Hz	222905
80A	2NO+2NC	-	AC 400V 60Hz	NC1-8008 400V 60Hz	222906
80A	2NO+2NC	-	AC 415V 50/60Hz	NC1-8008 415V 50/60Hz	222907
80A	2NO+2NC	-	AC 415V 50Hz	NC1-8008 415V 50Hz	222908
80A	2NO+2NC	-	AC 415V 60Hz	NC1-8008 415V 60Hz	222909
80A	2NO+2NC	-	AC 440V 50/60Hz	NC1-8008 440V 50/60Hz	222913
80A	2NO+2NC	-	AC 440V 50Hz	NC1-8008 440V 50Hz	222914
80A	2NO+2NC	-	AC 440V 60Hz	NC1-8008 440V 60Hz	222915
80A	2NO+2NC	-	AC 120V 60Hz	NC1-8008 120V 60Hz	225538
80A	2NO+2NC	-	AC 120V 50/60Hz	NC1-8008 120V 50/60Hz	226575
80A	2NO+2NC	-	DC 24V	NC1-8008Z 24V	225580
80A	2NO+2NC	-	DC 110V	NC1-8008Z 110V	225973
80A	2NO+2NC	-	DC 220V	NC1-8008Z 220V	225975

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
95A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-9511 110V 50/60Hz	223143
95A	3NO	1NO+1NC	AC 110V 50Hz	NC1-9511 110V 50Hz	223144
95A	3NO	1NO+1NC	AC 110V 60Hz	NC1-9511 110V 60Hz	223145
95A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-9511 120V 50/60Hz	223146
95A	3NO	1NO+1NC	AC 120V 50Hz	NC1-9511 120V 50Hz	223147
95A	3NO	1NO+1NC	AC 120V 60Hz	NC1-9511 120V 60Hz	223148
95A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-9511 220V 50/60Hz	223152
95A	3NO	1NO+1NC	AC 220V 50Hz	NC1-9511 220V 50Hz	223153
95A	3NO	1NO+1NC	AC 220V 60Hz	NC1-9511 220V 60Hz	223154
95A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-9511 230V 50/60Hz	223155
95A	3NO	1NO+1NC	AC 230V 50Hz	NC1-9511 230V 50Hz	223156
95A	3NO	1NO+1NC	AC 230V 60Hz	NC1-9511 230V 60Hz	223157
95A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-9511 240V 50/60Hz	223158
95A	3NO	1NO+1NC	AC 240V 50Hz	NC1-9511 240V 50Hz	223159
95A	3NO	1NO+1NC	AC 240V 60Hz	NC1-9511 240V 60Hz	223160
95A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-9511 24V 50/60Hz	223161
95A	3NO	1NO+1NC	AC 24V 50Hz	NC1-9511 24V 50Hz	223162
95A	3NO	1NO+1NC	AC 24V 60Hz	NC1-9511 24V 60Hz	223163
95A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-9511 380V 50/60Hz	223167
95A	3NO	1NO+1NC	AC 380V 50Hz	NC1-9511 380V 50Hz	223168
95A	3NO	1NO+1NC	AC 380V 60Hz	NC1-9511 380V 60Hz	223169
95A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-9511 400V 50/60Hz	223170
95A	3NO	1NO+1NC	AC 400V 50Hz	NC1-9511 400V 50Hz	223171
95A	3NO	1NO+1NC	AC 400V 60Hz	NC1-9511 400V 60Hz	223172
95A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-9511 415V 50/60Hz	223173
95A	3NO	1NO+1NC	AC 415V 50Hz	NC1-9511 415V 50Hz	223174
95A	3NO	1NO+1NC	AC 415V 60Hz	NC1-9511 415V 60Hz	223175
95A	3NO	1NO+1NC	AC 440V 50/60Hz	NC1-9511 440V 50/60Hz	223179
95A	3NO	1NO+1NC	AC 440V 50Hz	NC1-9511 440V 50Hz	223180
95A	3NO	1NO+1NC	AC 440V 60Hz	NC1-9511 440V 60Hz	223181
95A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-9511 110V 50/60Hz(korea)	226590
95A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-9511 220V 50/60Hz(korea)	226591
95A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-9511 380V 50/60Hz(korea)	226592
95A	3NO	1NO+1NC	AC 110V 50/60Hz	NC1-9511N 110V 50/60Hz	223188
95A	3NO	1NO+1NC	AC 110V 50Hz	NC1-9511N 110V 50Hz	223189
95A	3NO	1NO+1NC	AC 110V 60Hz	NC1-9511N 110V 60Hz	223190
95A	3NO	1NO+1NC	AC 220V 50/60Hz	NC1-9511N 220V 50/60Hz	223194
95A	3NO	1NO+1NC	AC 220V 50Hz	NC1-9511N 220V 50Hz	223195
95A	3NO	1NO+1NC	AC 220V 60Hz	NC1-9511N 220V 60Hz	223196
95A	3NO	1NO+1NC	AC 230V 50/60Hz	NC1-9511N 230V 50/60Hz	223197
95A	3NO	1NO+1NC	AC 230V 50Hz	NC1-9511N 230V 50Hz	223198
95A	3NO	1NO+1NC	AC 230V 60Hz	NC1-9511N 230V 60Hz	223199
95A	3NO	1NO+1NC	AC 240V 50/60Hz	NC1-9511N 240V 50/60Hz	223200
95A	3NO	1NO+1NC	AC 240V 50Hz	NC1-9511N 240V 50Hz	223201
95A	3NO	1NO+1NC	AC 240V 60Hz	NC1-9511N 240V 60Hz	223202
95A	3NO	1NO+1NC	AC 24V 50/60Hz	NC1-9511N 24V 50/60Hz	223203
95A	3NO	1NO+1NC	AC 24V 50Hz	NC1-9511N 24V 50Hz	223204
95A	3NO	1NO+1NC	AC 24V 60Hz	NC1-9511N 24V 60Hz	223205
95A	3NO	1NO+1NC	AC 380V 50/60Hz	NC1-9511N 380V 50/60Hz	223209
95A	3NO	1NO+1NC	AC 380V 50Hz	NC1-9511N 380V 50Hz	223210

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
95A	3NO	1NO+1NC	AC 380V 60Hz	NC1-9511N 380V 60Hz	223211
95A	3NO	1NO+1NC	AC 400V 50/60Hz	NC1-9511N 400V 50/60Hz	223212
95A	3NO	1NO+1NC	AC 400V 50Hz	NC1-9511N 400V 50Hz	223213
95A	3NO	1NO+1NC	AC 400V 60Hz	NC1-9511N 400V 60Hz	223214
95A	3NO	1NO+1NC	AC 415V 50/60Hz	NC1-9511N 415V 50/60Hz	223215
95A	3NO	1NO+1NC	AC 415V 50Hz	NC1-9511N 415V 50Hz	223216
95A	3NO	1NO+1NC	AC 415V 60Hz	NC1-9511N 415V 60Hz	223217
95A	3NO	1NO+1NC	AC 120V 60Hz	NC1-9511N 120V 60Hz	225554
95A	3NO	1NO+1NC	AC 120V 50/60Hz	NC1-9511N 120V 50/60Hz	226985
95A	3NO	1NO+1NC	DC 110V	NC1-9511Z 110V	223233
95A	3NO	1NO+1NC	DC 220V	NC1-9511Z 220V	223234
95A	3NO	1NO+1NC	DC 24V	NC1-9511Z 24V	223235
95A	3NO	1NO+1NC	DC 48V	NC1-9511Z 48V	223236
95A	4NO	-	AC 110V 50/60Hz	NC1-9504 110V 50/60Hz	223017
95A	4NO	-	AC 110V 50Hz	NC1-9504 110V 50Hz	223018
95A	4NO	-	AC 110V 60Hz	NC1-9504 110V 60Hz	223019
95A	4NO	-	AC 220V 50/60Hz	NC1-9504 220V 50/60Hz	223023
95A	4NO	-	AC 220V 50Hz	NC1-9504 220V 50Hz	223024
95A	4NO	-	AC 220V 60Hz	NC1-9504 220V 60Hz	223025
95A	4NO	-	AC 230V 50/60Hz	NC1-9504 230V 50/60Hz	223026
95A	4NO	-	AC 230V 50Hz	NC1-9504 230V 50Hz	223027
95A	4NO	-	AC 230V 60Hz	NC1-9504 230V 60Hz	223028
95A	4NO	-	AC 240V 50/60Hz	NC1-9504 240V 50/60Hz	223029
95A	4NO	-	AC 240V 50Hz	NC1-9504 240V 50Hz	223030
95A	4NO	-	AC 240V 60Hz	NC1-9504 240V 60Hz	223031
95A	4NO	-	AC 24V 50/60Hz	NC1-9504 24V 50/60Hz	223032
95A	4NO	-	AC 24V 50Hz	NC1-9504 24V 50Hz	223033
95A	4NO	-	AC 24V 60Hz	NC1-9504 24V 60Hz	223034
95A	4NO	-	AC 380V 50/60Hz	NC1-9504 380V 50/60Hz	223038
95A	4NO	-	AC 380V 50Hz	NC1-9504 380V 50Hz	223039
95A	4NO	-	AC 380V 60Hz	NC1-9504 380V 60Hz	223040
95A	4NO	-	AC 400V 50/60Hz	NC1-9504 400V 50/60Hz	223041
95A	4NO	-	AC 400V 50Hz	NC1-9504 400V 50Hz	223042
95A	4NO	-	AC 400V 60Hz	NC1-9504 400V 60Hz	223043
95A	4NO	-	AC 415V 50/60Hz	NC1-9504 415V 50/60Hz	223044
95A	4NO	-	AC 415V 50Hz	NC1-9504 415V 50Hz	223045
95A	4NO	-	AC 415V 60Hz	NC1-9504 415V 60Hz	223046
95A	4NO	-	AC 440V 50/60Hz	NC1-9504 440V 50/60Hz	223050
95A	4NO	-	AC 440V 50Hz	NC1-9504 440V 50Hz	223051
95A	4NO	-	AC 440V 60Hz	NC1-9504 440V 60Hz	223052
95A	4NO	-	AC 120V 60Hz	NC1-9504 120V 60Hz	225531
95A	4NO	-	AC 120V 50/60Hz	NC1-9504 120V 50/60Hz	225832
95A	4NO	-	AC 110V 50/60Hz	NC1-9504N 110V 50/60Hz	223059
95A	4NO	-	AC 110V 50Hz	NC1-9504N 110V 50Hz	223060
95A	4NO	-	AC 110V 60Hz	NC1-9504N 110V 60Hz	223061
95A	4NO	-	AC 220V 50/60Hz	NC1-9504N 220V 50/60Hz	223065
95A	4NO	-	AC 220V 50Hz	NC1-9504N 220V 50Hz	223066
95A	4NO	-	AC 220V 60Hz	NC1-9504N 220V 60Hz	223067
95A	4NO	-	AC 230V 50/60Hz	NC1-9504N 230V 50/60Hz	223068
95A	4NO	-	AC 230V 50Hz	NC1-9504N 230V 50Hz	223069

AC-3 Current	Main Contacts	Auxiliary Contacts	Coil	Model Description	Code
95A	4NO	-	AC 230V 60Hz	NC1-9504N 230V 60Hz	223070
95A	4NO	-	AC 240V 50/60Hz	NC1-9504N 240V 50/60Hz	223071
95A	4NO	-	AC 240V 50Hz	NC1-9504N 240V 50Hz	223072
95A	4NO	-	AC 240V 60Hz	NC1-9504N 240V 60Hz	223073
95A	4NO	-	AC 24V 50/60Hz	NC1-9504N 24V 50/60Hz	223074
95A	4NO	-	AC 24V 50Hz	NC1-9504N 24V 50Hz	223075
95A	4NO	-	AC 24V 60Hz	NC1-9504N 24V 60Hz	223076
95A	4NO	-	AC 380V 50/60Hz	NC1-9504N 380V 50/60Hz	223080
95A	4NO	-	AC 380V 50Hz	NC1-9504N 380V 50Hz	223081
95A	4NO	-	AC 380V 60Hz	NC1-9504N 380V 60Hz	223082
95A	4NO	-	AC 400V 50/60Hz	NC1-9504N 400V 50/60Hz	223083
95A	4NO	-	AC 400V 50Hz	NC1-9504N 400V 50Hz	223084
95A	4NO	-	AC 400V 60Hz	NC1-9504N 400V 60Hz	223085
95A	4NO	-	AC 415V 50/60Hz	NC1-9504N 415V 50/60Hz	223086
95A	4NO	-	AC 415V 50Hz	NC1-9504N 415V 50Hz	223087
95A	4NO	-	AC 415V 60Hz	NC1-9504N 415V 60Hz	223088
95A	4NO	-	DC 24V	NC1-9504Z 24V	225582
95A	4NO	-	DC 110V	NC1-9504Z 110V	225979
95A	4NO	-	DC 220V	NC1-9504Z 220V	225981
95A	4NO	-	DC 48V	NC1-9504Z 48V	226022
95A	2NO+2NC	-	AC 110V 50/60Hz	NC1-9508 110V 50/60Hz	223101
95A	2NO+2NC	-	AC 110V 50Hz	NC1-9508 110V 50Hz	223102
95A	2NO+2NC	-	AC 110V 60Hz	NC1-9508 110V 60Hz	223103
95A	2NO+2NC	-	AC 220V 50/60Hz	NC1-9508 220V 50/60Hz	223107
95A	2NO+2NC	-	AC 220V 50Hz	NC1-9508 220V 50Hz	223108
95A	2NO+2NC	-	AC 220V 60Hz	NC1-9508 220V 60Hz	223109
95A	2NO+2NC	-	AC 230V 50/60Hz	NC1-9508 230V 50/60Hz	223110
95A	2NO+2NC	-	AC 230V 50Hz	NC1-9508 230V 50Hz	223111
95A	2NO+2NC	-	AC 230V 60Hz	NC1-9508 230V 60Hz	223112
95A	2NO+2NC	-	AC 240V 50/60Hz	NC1-9508 240V 50/60Hz	223113
95A	2NO+2NC	-	AC 240V 50Hz	NC1-9508 240V 50Hz	223114
95A	2NO+2NC	-	AC 240V 60Hz	NC1-9508 240V 60Hz	223115
95A	2NO+2NC	-	AC 24V 50/60Hz	NC1-9508 24V 50/60Hz	223116
95A	2NO+2NC	-	AC 24V 50Hz	NC1-9508 24V 50Hz	223117
95A	2NO+2NC	-	AC 24V 60Hz	NC1-9508 24V 60Hz	223118
95A	2NO+2NC	-	AC 380V 50/60Hz	NC1-9508 380V 50/60Hz	223122
95A	2NO+2NC	-	AC 380V 50Hz	NC1-9508 380V 50Hz	223123
95A	2NO+2NC	-	AC 380V 60Hz	NC1-9508 380V 60Hz	223124
95A	2NO+2NC	-	AC 400V 50/60Hz	NC1-9508 400V 50/60Hz	223125
95A	2NO+2NC	-	AC 400V 50Hz	NC1-9508 400V 50Hz	223126
95A	2NO+2NC	-	AC 400V 60Hz	NC1-9508 400V 60Hz	223127
95A	2NO+2NC	-	AC 415V 50/60Hz	NC1-9508 415V 50/60Hz	223128
95A	2NO+2NC	-	AC 415V 50Hz	NC1-9508 415V 50Hz	223129
95A	2NO+2NC	-	AC 415V 60Hz	NC1-9508 415V 60Hz	223130
95A	2NO+2NC	-	AC 440V 50/60Hz	NC1-9508 440V 50/60Hz	223134
95A	2NO+2NC	-	AC 440V 50Hz	NC1-9508 440V 50Hz	223135
95A	2NO+2NC	-	AC 440V 60Hz	NC1-9508 440V 60Hz	223136
95A	2NO+2NC	-	AC 120V 60Hz	NC1-9508 120V 60Hz	225532
95A	2NO+2NC	-	AC 120V 50/60Hz	NC1-9508 120V 50/60Hz	225831
95A	2NO+2NC	-	DC 24V	NC1-9508Z 24V	225581
95A	2NO+2NC	-	DC 110V	NC1-9508Z 110V	225983
95A	2NO+2NC	-	DC 220V	NC1-9508Z 220V	225985