

**!** CCT / Light Output

**Light Output**

**3000K / 4000K**

Neutral Warm

4000K 3000K


**Light Output**








ON OFF

1 2

		0040051, 0040053		0040151, 0040153		
1	2	mA	3000K [lm]	4000K [lm]	3000K [lm]	4000K [lm]
○	○	175	1025	1125	1050	1150
○	●	330	1900	2050	1925	2100
●	●	450	2525	2750 ⚙	2550	2800 ⚙

⚙ Factory Settings

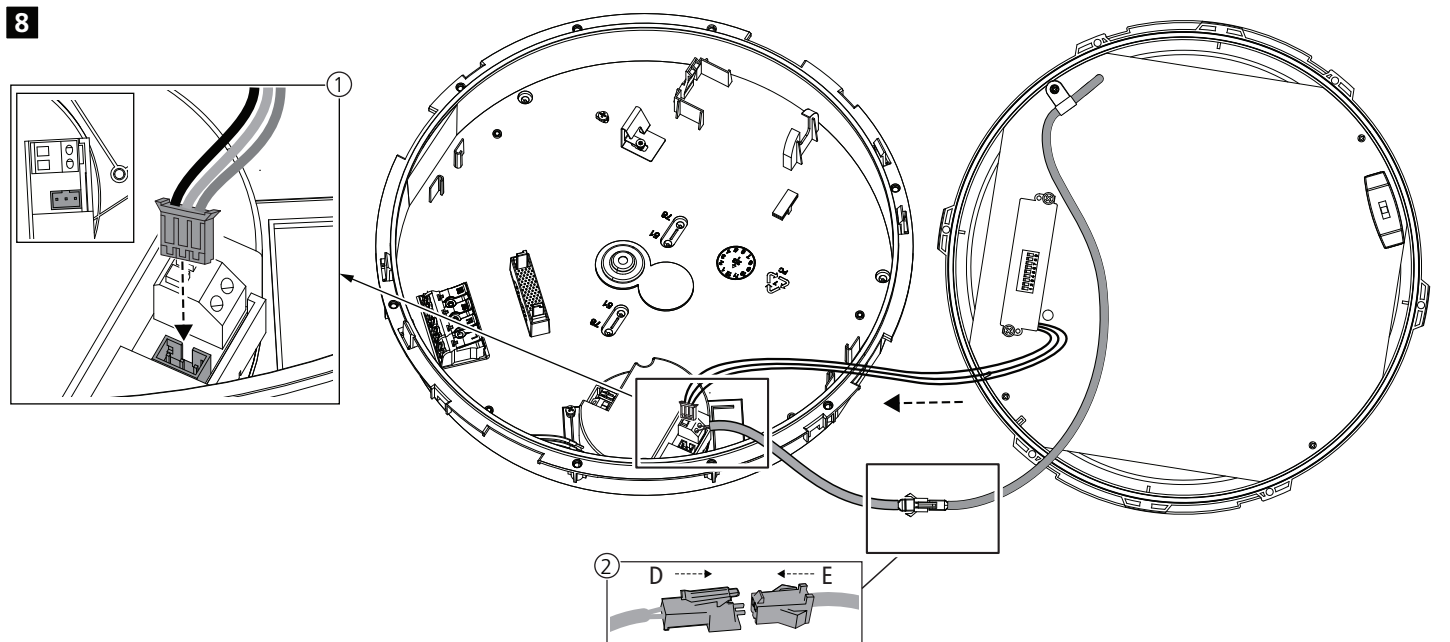

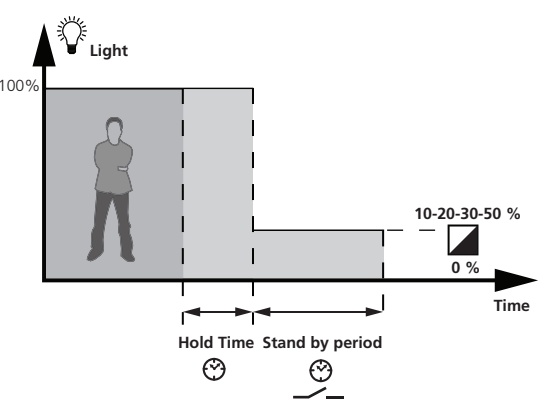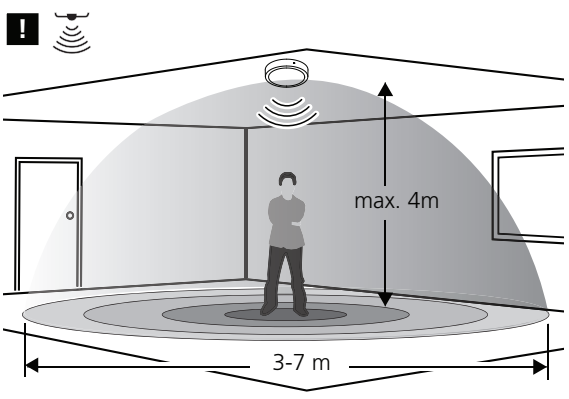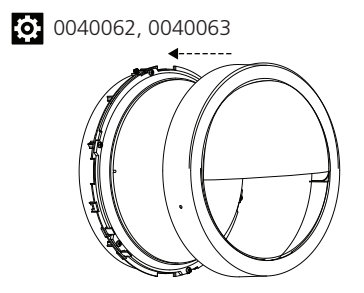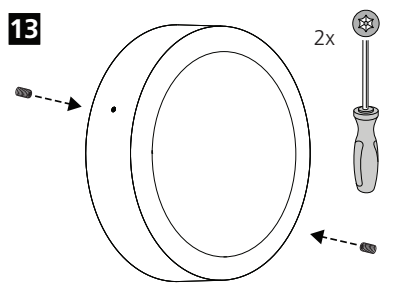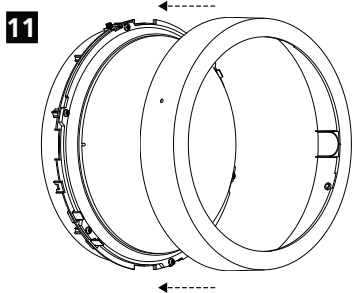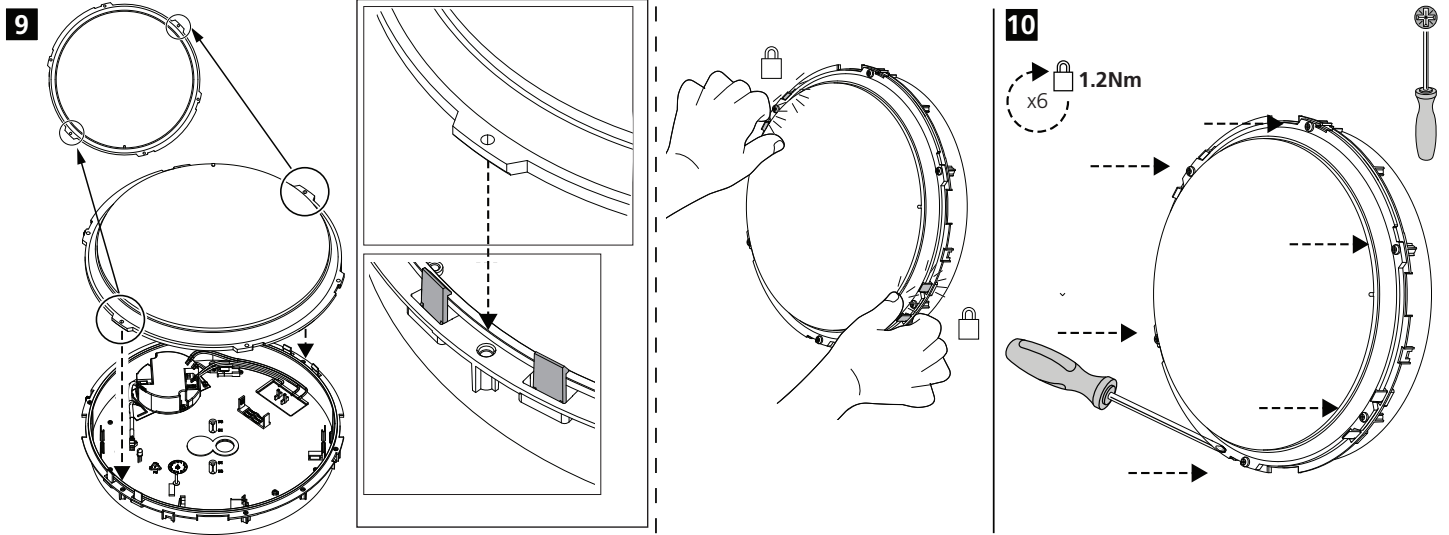

**!**

ON  
  
  
  
 OFF

**Detection Area**

1	
I	● 100%
II	○ 50%

**Hold-Time**

2		3	🕒
I	● ●		5s
II	● ○		30s
III	○ ●		1min
IV	○ ○		10min

**Daylight Threshold**



4		5	LUX ON	LUX OFF
I	● ●		Disable	Disable
II	● ○		50lux	100lux
III	○ ●		10lux	100lux
IV	○ ○		2lux	100lux

**Stand-by period**



6		7	🕒
I	● ●		0s
II	● ○		30s
III	○ ●		20min
IV	○ ○		+∞

**Stand-by dimming level**

8		9
I	● ●	10%
II	● ○	20%
III	○ ●	30%
IV	○ ○	50%

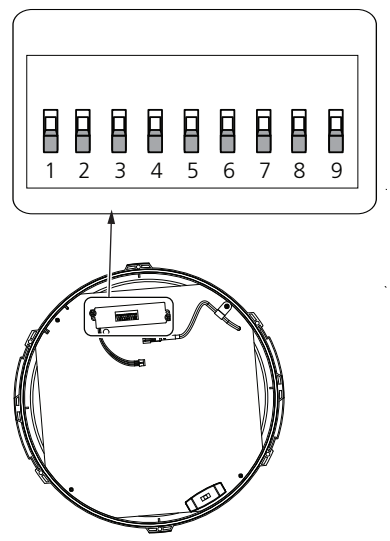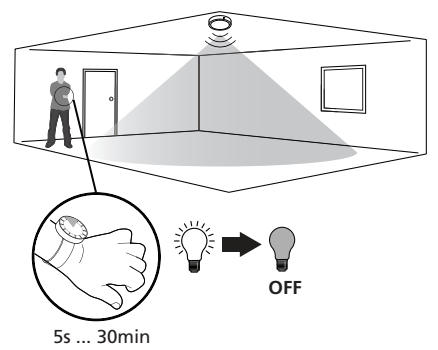

**Novella IP66 EM3 KIT for Large**  
0040066

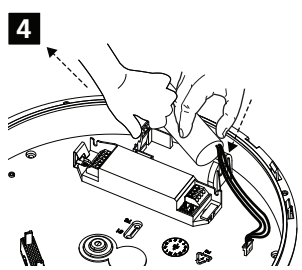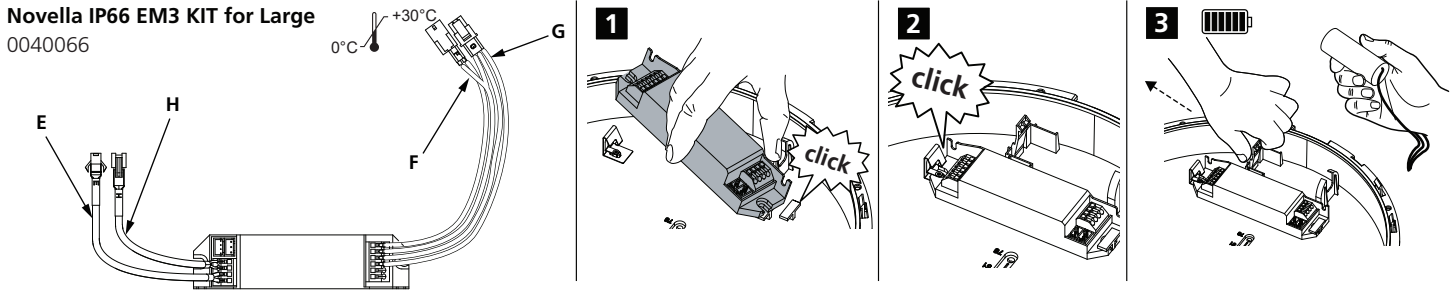


**POWERIOD™**




LiFeP04 3.2V 3200mAh 10.24Wh  
26650 1IFpR27/66-1 L1132NW  
21010323210202  
Art. No. 28002322









Date of Manufacture: \_\_\_\_\_  
Date of Installation: \_\_\_\_\_

Warning: Do not disassemble, puncture, crush, heat or burn

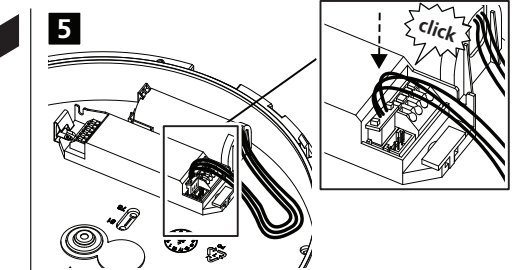

LED INDICATION		STATUS		COMMENT
LED Colour	Status	Flashing		
		ON	OFF	
Green	●	∞	-	Power and System OK
	●	4.0 sec	1.0 sec	Battery Connected and Charging
	●	2.0 sec	2.0 sec	Duration Test in Progress
	●	0.5 sec	0.5 sec	Function Test in Progress
Red	●	4.0 sec	1.0 sec	Battery Temperature Issue
	●	0.5 sec	0.5 sec	Battery Fault
	●	0.5 sec	0.5 sec	Low Battery
	●	0.5 sec	0.5 sec	Charging Fault
	●	0.5 sec	0.5 sec	Driver Fault
	●	0.5 sec	0.5 sec	Load Fault
Red&Green	●	-	∞	Power off

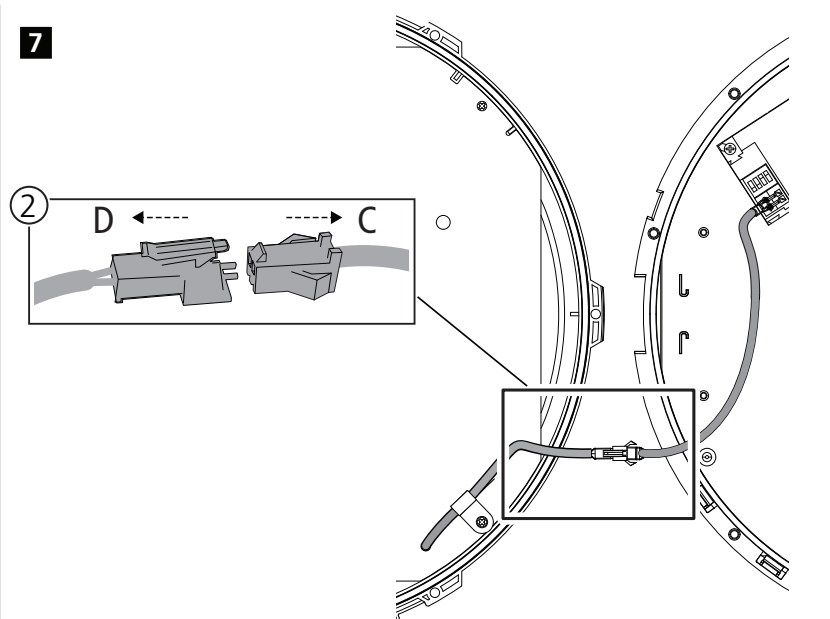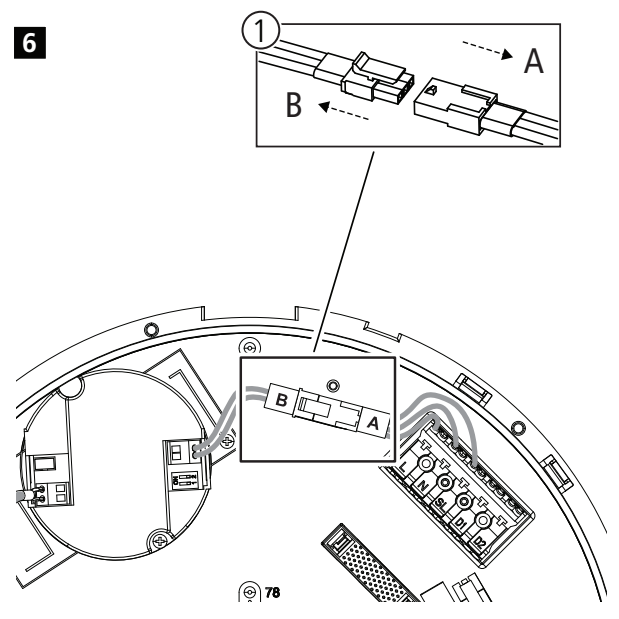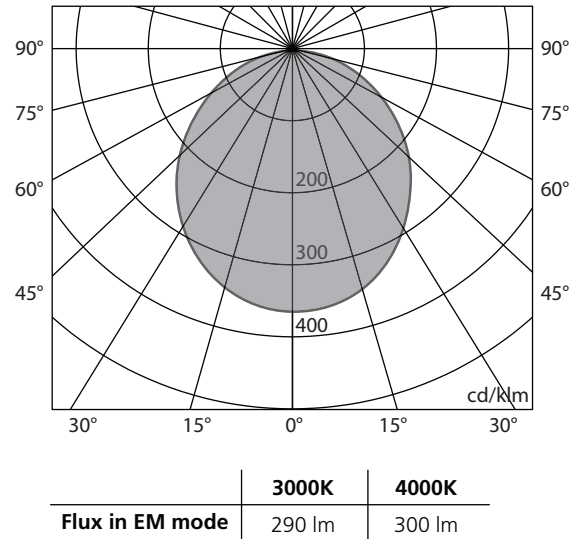

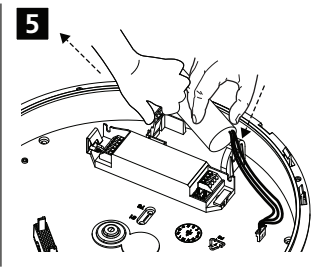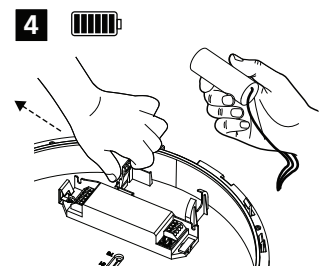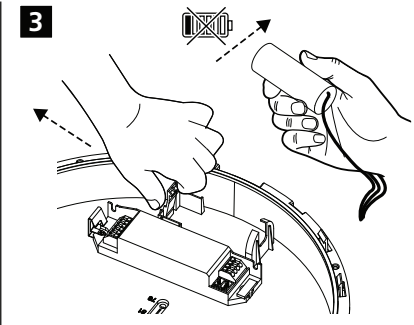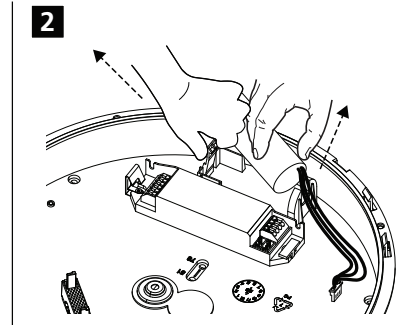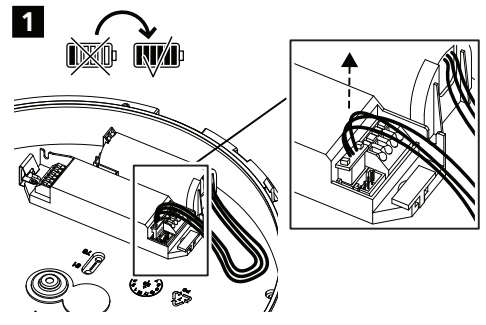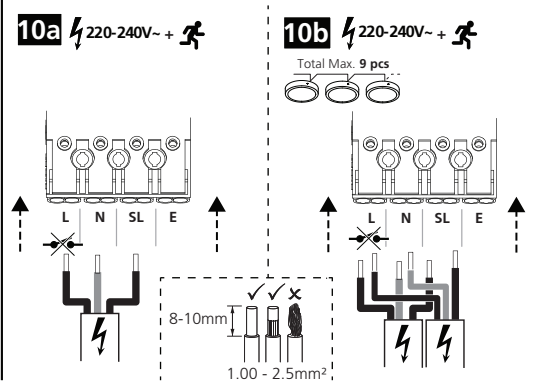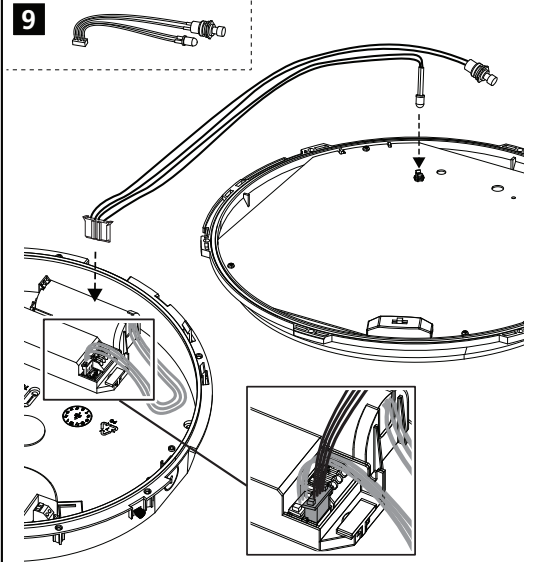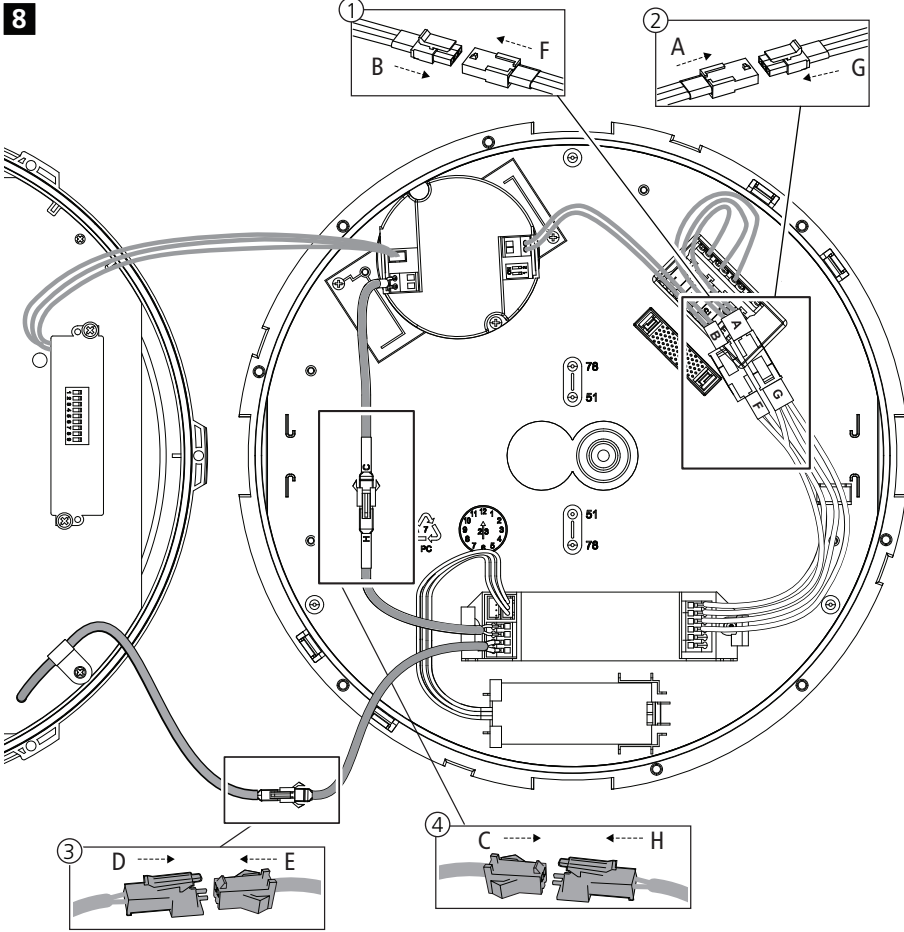

**POWERIOD™**

LiFeP04 3.2V 3200mAh 10.24Wh  
26650 1FpR27/66-1 L1132NW  
21010323210202  
Art. No. 28002322

Warning: Do not disassemble, puncture, crush, heat or burn

Date of Manufacture

Date of Installation:

