

APPLICATION

- Supporting frame suitable for the installation of all Roca wall-hung In-Tank toilet bowls with an axial distance of 180 and 230mm.
- For mounting in front of a solid or drywall construction.

FEATURES / SPECIFICATIONS

- Supporting frame made from steel profiles capable to resist 400 kg.
- Surface protected by a powder-coating in blue (RAL 5002).
- Galvanized leg supports, adjustable 0-200mm with a brake system that allows the easy adjustment of the frame's height.
- Rotating plastic base for easy installation.
- Self-adhesive template for revision box opening (back part of the toilet) to the cladding panels.
- 135-205 mm, wall bracket adjustable.
- Waste pipe clamp with depth and rotation adjustment.
- Suitable for 3 different installation fixation types.
 - Floor (bottom) + Wall (top)
 - Wall (bottom and top)
 - Lateral (bottom and top)



MODELS / REFERENCES

Reference	Description	Installation Depth	WC connection elbow
A8900F8001	Duplo In-Tank Low Height	135-205mm	DN90/DN100

COMPATIBLE TOILETS

Reference	Description
A80336NS0.	Avant WH
A80310400.	Insignia WH
A80350400.	Vorea In-Tank
A80309400.	Inspira In-Tank WH

RECOMMENDED ACCESSORIES

Reference	Description
A890063000	Silent in Wall – Universal sound insulation mat for wall-hung WC/Bidet
A890064050	Y Elbow
A890064060	Adaptor Ø90/Ø100 - PVC

STANDARDS

Meets the following standards

- NF 12 208
 - EN 14055
 - ISO 9227
- Certifications: CE




INSTALLATION NOTES

- Install this product according to installations instructions provided.
- For a pre-wall installation, it's needed a minimum thickness of the supporting wall of 80mm
- Before constructing the wall, verify:
 - The threaded rods length in order to be suitable to the WC wall-hung selected
 - Height dimension from finished floor to the top of the WC.
- It also allows system installation between modular walls (plasterboard)

THE PRODUCT CONTAINS

- WC connection set with manual instructions for mounting toilet bowl
- Fixing set to floor and wall (Fischer/Mea): 4 plugs SX10 + 4 screws hexagon head with integrated washer.
- Protection caps (for WC connection pipes) and protection tubes for M12 threaded rods.

PRODUCT SCHEME

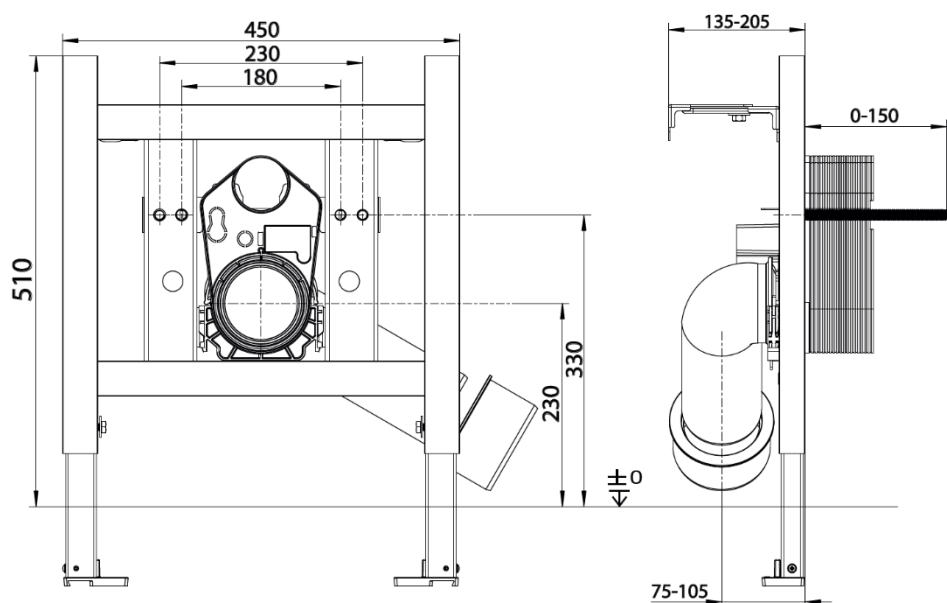

All dimensions are nominal, in millimetres, are subject to normal manufacturing variations.
Dimensions and specifications are subject to change without prior notice

September 2025
Supersedes all previous issues



Roca Sanitario, S.A. Avda. Diagonal, 513
08029 Barcelona Spain
website : www.roca.com
e-mail : productsupport.rs@roca.net