

EAN: 6414150078415

www.oras.com/en/products/oras/product/1067

Bath and shower faucet with white Oras Apollo shower set. There are also in-built limitation options for water temperature and maximum flow-rate. Oras Apollo shower set including hand shower, 650 mm shower rail, soap tray and 1500 mm shower hose.



- Bathroom, Shower
- Single lever
- Wall mounted
- Chrome
- Fixed spout
- pull diverter
- shower rail, hand shower, showerrail set, shower hose (1500 mm)
- needle
- Limitation option for maximum flow-rate

Technical data

Flow properties

Flow-rate at 300 kPa	0.33 l/s
Flow-rate at 300 kPa (with flow reducers)	0.2 l/s
Pressure loss 0.2 l/s (with flow reducers)	300 kPa
Pressure loss with flow (0.2 l/s)	160 kPa
Pressure loss with flow (0.3 l/s)	260 kPa

Technical properties


Hot water supply	max. +80°C
Working pressure	50 - 1000 kPa
Connection size	G3/4
Installation width	CC150± 3 mm
Projection	125 mm
Material	brass



Regulations

EN standard	EN 817
Noise class 0.2 l/s	I (ISO 3822)
Noise class 0.3 l/s	II (ISO 3822)


Type approvals

STF certificate	VTT-RTH-00091-17
-----------------	-------------------------

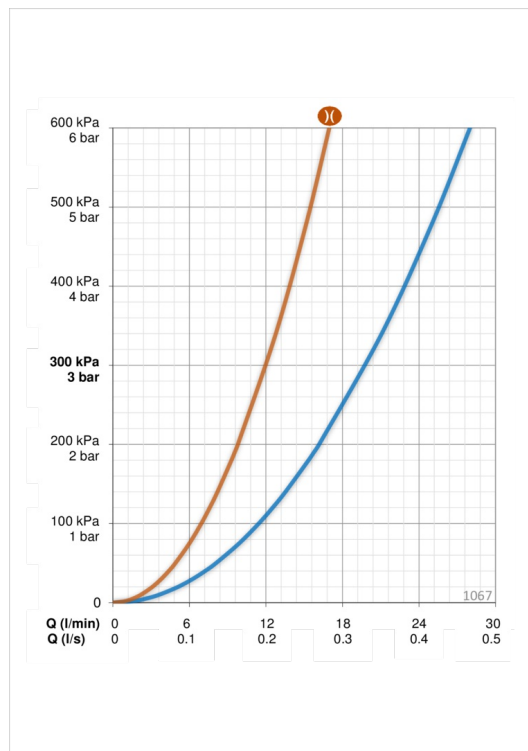

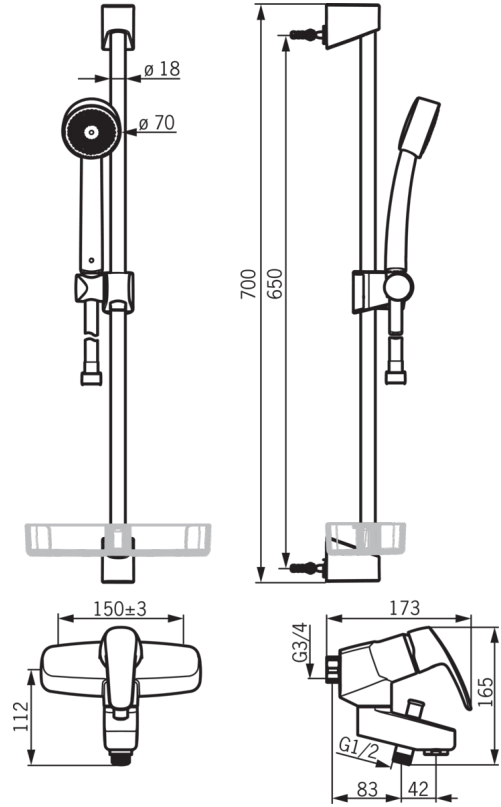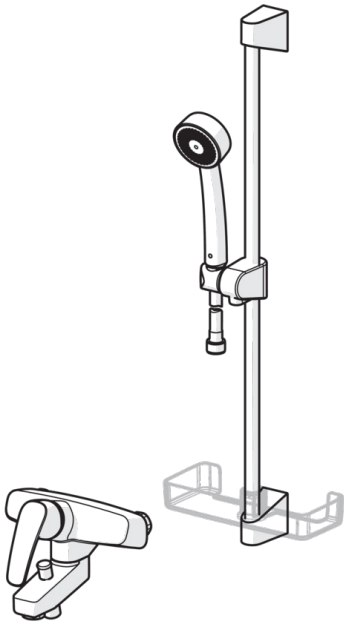

Spare parts

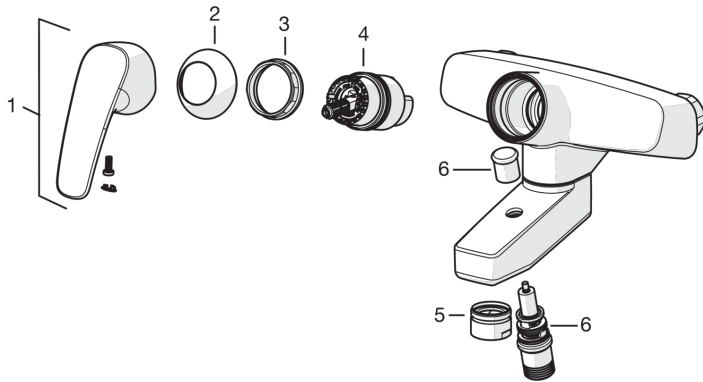

SP1072

	Code
01	602502V
02	1000785V
03	158726
04	158890
05	232213
06	601988V

SP520

	Code
01	601189V
01	601189V-11
02	601208V
02	601208V-11

