

DAKA120_29W_LED_3480	IP44	IK03		CE	
----------------------	------	------	---	----	--

Tope article 6003000041

Data Sheet

A recessed/surface/suspended edge lit LED luminaire with a slim 9mm profile. Electronic, fixed output gear. IP44 from below, IP40_IP20 from above, IK03. Body: sheet steel white (RAL9016). Diffuser: UV-stabilised, PRO-LINE prismatic optic. Electrical connection via push wire terminal blocks. Complete with 4000K LED.

Dimencions: 597x597x9

Total power: 29,2W

Luminaire luminous flux: 3478 lm

Luminaire efficiency: 119,11 lm/W

Weight: 4,8 kg

Light source: LED

Color rendering index min.: >80



Correlated colour temperature: 4000 Kelvin

Rated median usefull life: 50000 L90 25°C

Ballast: 1x HF_TUV

Luminaire input power: 29W

Dimming: Fixed output

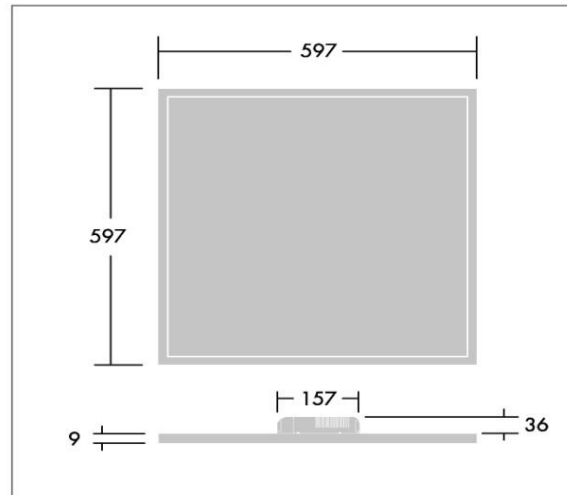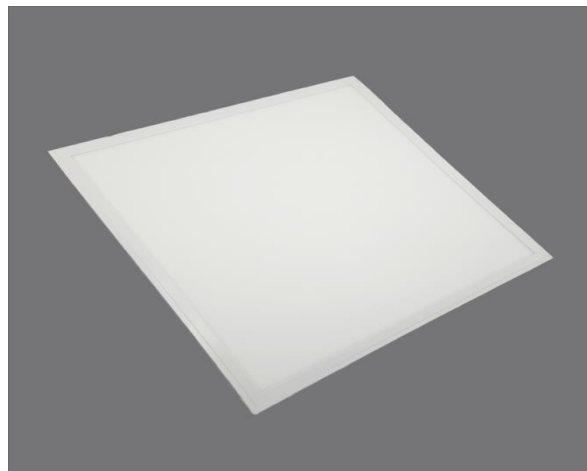

All values are rated values. TopE Lighting uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C. In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint

