

„SOPOT“ LED CEILING LIGHT



Model No. SOPOT_18W_LED_1440 Article: 6004000055
 SOPOT_24W_LED_1920 6004000056
 SOPOT_36W_LED_2880 6004000057
 SOPOT_48W_LED_3840 6004000058

EN

Instalation & Operating Instruction

1. Designated Use

- SOPOT LED panels are an indoor use luminaire, fixed straight to the ceiling or wall.
- Suitable for a wide range of locations: offices, living rooms, corridors, staircases, bars and restaurants etc.

WARNING

2. Basic Safety Instruction

Danger of death through electric shock


- Must only be installed by qualified electricians.
- Conforms to the latest EC directives.
- Designed for use in normal environments.

IMPORTANT


Switch off the electricity at the fuse box by removing the relevant fuse or switching off the circuit breaker before proceeding with the installation

3. Instalation Procedure:


1. Switch off the power

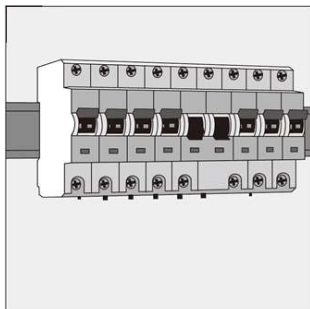


2. Fix the base with the screws to the ceiling or wall

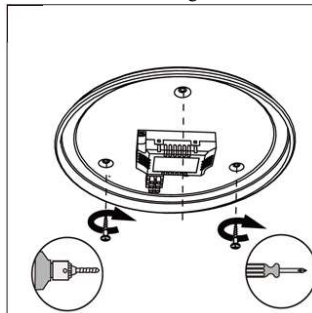


3. Connect wires to the terminals

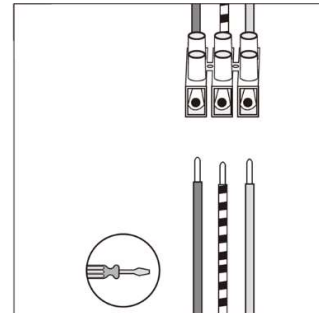

4. Attach the cover to the base

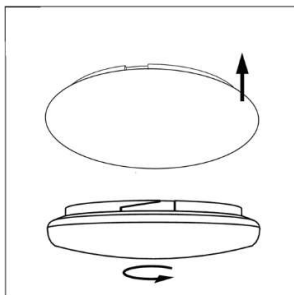

5. Turn on the power

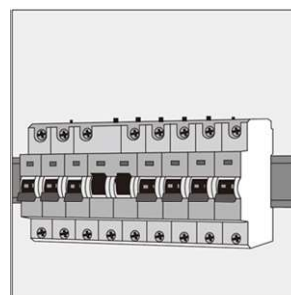


4. Luminaire control:

The luminaire is controlled with the switch or the CMT Series IR remote controller

1. Turn off luminaire with switch and then turn it on its color temperature (CCT) will change from 3000K to 4500K, then turn off and turn it on again, color temperature will change from 4500K to 6500K;
2. Possible functions with the remote controller:
 - Turn ON/Turn OFF;
 - Increase or decrease the brightness of the luminaire;
 - Set the color temperature to 3000K, 4500K, 6500K;
 - Change CCT from 3000K to 6500K;
 - Night light function;
 - Lighting for 30 seconds and automatically turn off function;

5. Remote controller instruction

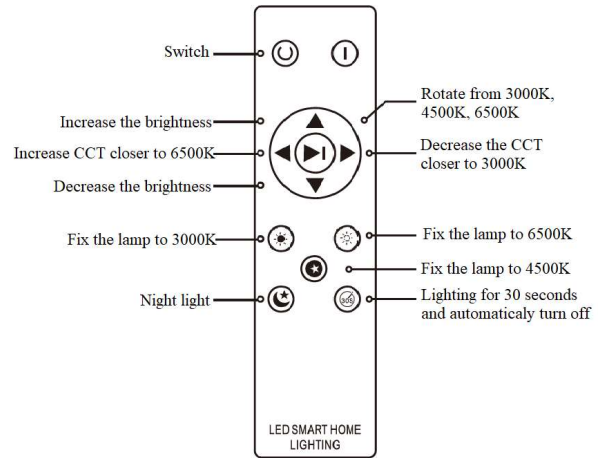

Works with 2 AAA Batteries

| Technical specification | |
|--------------------------|--|
| Energy Efficiency | Class A+ |
| Power Supply | 220-240V 50Hz |
| Power Factor | >0.90 |
| Colour Temperature | 3000 – 6500 K |
| Colour Rendering Index | >80 |
| Lumen Output Initial | SOPOT_18W_LED_1440 - 2700 lm max SOPOT_24W_LED_1920 - 3600 lm max SOPOT_36W_LED_2880 - 5400 lm max SOPOT_48W_LED_3840 - 6500 lm max |
| Lamp beam angle | 120 degrees |
| Environmental Protection | IP20 |
| EC Directives | Conforms to current EC Directives |
| Warranty | 36 Months |