






NEOSTAR

2S Mono-Glass Module

440W-470W

Technical Features:

-  Partial Shading Optimisation
-  Better Temperature Coefficient
-  High Temperature Restriction
-  Micro-crack Resistance
-  Higher Power
-  Lower BOS
-  More Aesthetic Values



red dot winner 2023



Product Warranty



Performance Warranty



Warranty partner

Munich RE 



470W
Output

23.6%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

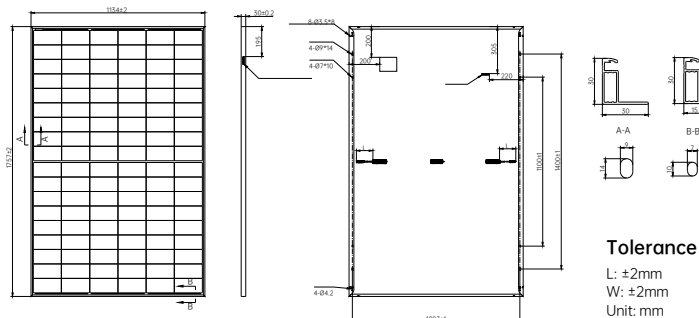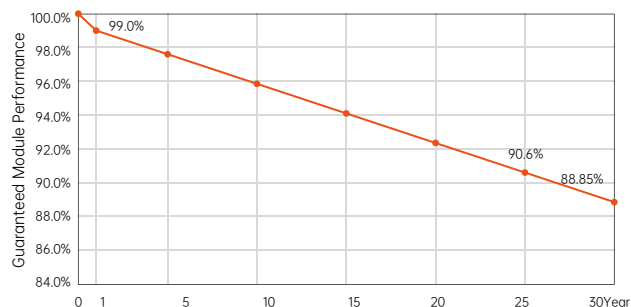

Tolerance
L: ±2mm
W: ±2mm
Unit: mm

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s) Power Tolerance: 0~ +3%

Module Type	AIKO-A440-MAH54Mb		AIKO-A445-MAH54Mb		AIKO-A450-MAH54Mb		AIKO-A455-MAH54Mb		AIKO-A460-MAH54Mb		AIKO-A465-MAH54Mb		AIKO-A470-MAH54Mb	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	440	331	445	335	450	339	455	343	460	346	465	350	470	354
V _{oc} [V]	40.82	38.55	40.88	38.60	40.94	38.66	41.00	38.72	41.06	38.77	41.12	38.83	41.18	38.89
V _{mp} [V]	34.38	32.47	34.44	32.52	34.50	32.58	34.56	32.64	34.62	32.69	34.68	32.75	34.74	32.81
I _{sc} [A]	13.92	11.26	14.02	11.34	14.12	11.42	14.22	11.50	14.25	11.52	14.29	11.55	14.32	11.58
I _{mp} [A]	12.80	10.22	12.93	10.32	13.05	10.41	13.17	10.51	13.29	10.61	13.41	10.71	13.54	10.80
Module Efficiency	22.1%		22.3%		22.6%		22.8%		23.1%		23.3%		23.6%	

Product Specification

Cell Type	N-Type ABC
Front Cover Mono glass	3.2 mm tempered glass
Frame	Black Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ±1200mm
No. of Cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4
Weight	20.6kg±3%
Dimension	1757*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'H

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	ClassII
V _{oc} and I _{sc} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	40 mm diameter hail at 23 m/s
Fire Rating	IEC Class C



www.aikosolar.com
marketing@aikosolar.com

*AIKO reserves right to update the specification without notice
*Optional Munich Re coverage is available upon request
V5.1_202505_DsDr_EN