



# Road and urban luminaires



SKS 152 ALFA



Type	SKS 152 Alfa	Optic	Facetted semi closed
Light source	HID lamps	Optical cover	Flat glass to reduce glare and night nuisance
Lamp included	Yes(K), No	Materials and finishing	Body: die-cast aluminum Optical covers: toughened glass Reflector: high-purity aluminum Closing clip: stainless steel
Input voltage	220 - 240 V	Color	Grey
Gear	Electro magnetic (EM), Electronic (EL)	Impact resistance	IK08
Ignitor	Semi-parallel	Ingress protection	IP66
Options	Dimming (Dimm) is available in EL version	Application	Residential areas • Roads • Car parks • Industry
Installation	Side-entry mounting: lateral entry Ø48/60mm Post-top mounting: axial entry Ø48/60 mm Spigot is reversible for side-entry and post-top mounting Recommended mounting height: 10 m	Maintenance	From above by opening the housing with a single quick-release clip.

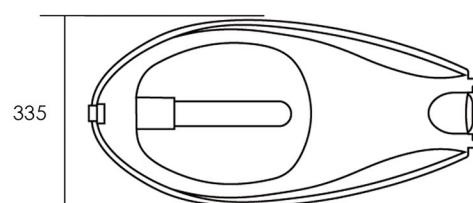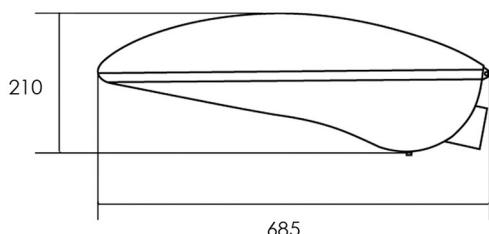




## Benefits

- Modern style
- Quality lighting for safe, comfortable driving, and for area illumination
- Effective optical system
- Low initial investment and maintenance costs
- Effective beam control and uniform light distribution
- Suitable for post-top and side-entry mounting; bracket for wall-mounting is available

## Product family range

Code	Type	Cape base	Control gear	Lamp power W	Weght kg
600552411001	SKS 152 Alfa 70 EI	E 27	Electronic	70	9
600552411002	SKS 152 Alfa 70 EI DIMM	E 27	Electronic	70	9
600552411003	SKS 152 Alfa 70 EI DIMM K	E 27	Electronic	70	9
600552411004	SKS 152 Alfa 70 EM	E 27	Electro magnetic	70	9
600552411005	SKS 152 Alfa 70 EM K	E 27	Electro magnetic	70	9
600552411006	SKS 152 Alfa 150 EI	E 40	Electronic	150	10,5
600552411007	SKS 152 Alfa 150 EI DIMM	E 40	Electronic	150	10,5
600552411008	SKS 152 Alfa 150 EI DIMM K	E 40	Electronic	150	10,5
600552411009	SKS 152 Alfa 150 EM	E 40	Electro magnetic	150	10,5
600552411010	SKS 152 Alfa 150 EM K	E 40	Electro magnetic	150	10,5

K - with lamp

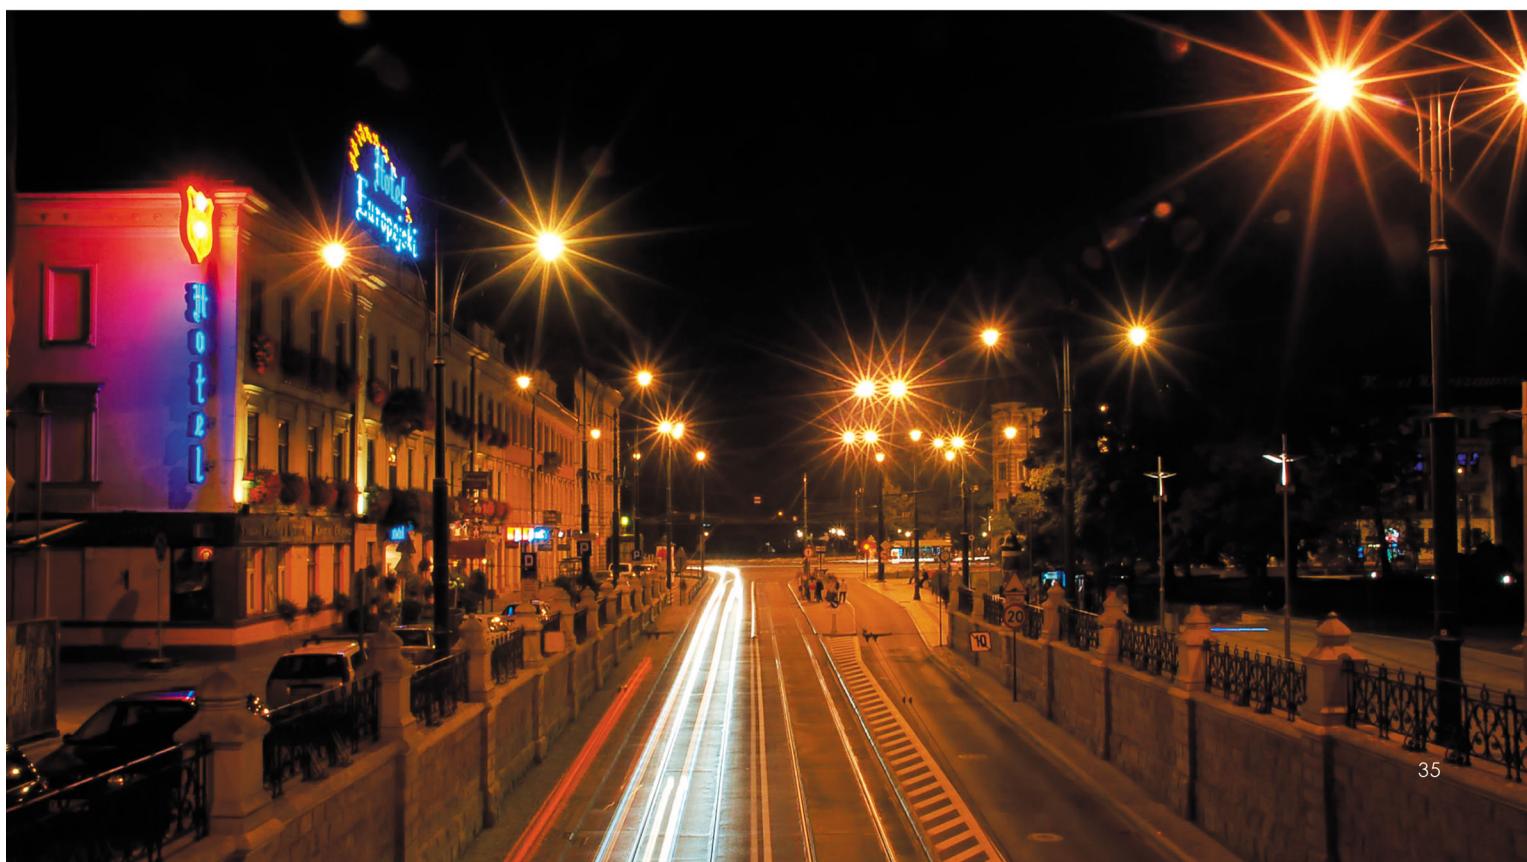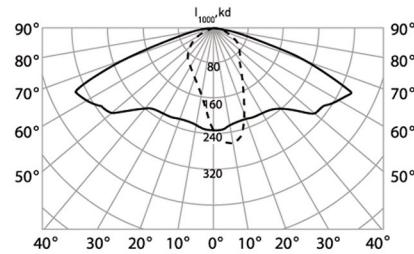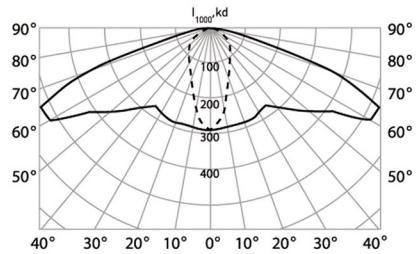



## OUTDOOR LUMINAIRES